



REMOS GX AVIATOR

Pilot Operating Handbook for Light Sport Aircraft

Airplane Registration Number _____

Airplane Serial Number _____

REMOS Order No.

104177, dated December 2017

Introduction

Light Sport Aircraft REMOS GX

The REMOS GX was manufactured in accordance with the Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.

The standards to be used for certification are given by FAA and can be obtained from the FAA's website. For this airplane the following standards have been used:

number	revision	purpose
ASTM F2245	16c	Design and Performance
ASTM F2245	16c	Required Equipment
ASTM F2245	16c	Aircraft Operating Instructions
ASTM F2972	15	Quality Assurance
ASTM F2295	06	Continued Airworthiness
ASTM F2483	12	Maintenance Manual
ASTM F2746	14	Pilot Operating Handbook

NOTE	This table is applicable only for newly delivered aircraft. It is not applicable in case the POH has been updated for existing aircraft.
-------------	--

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

Manufacturer: REMOS AG
Franzfelde 31
D-17309 Pasewalk
GERMANY

Phone: +49 3973/225519-0
Fax: +49 3973/225519-99

Internet: www.remos.com

Introduction

List of Content and Revisions

This POH consists of the following listed pages and sections. You will find a marking indicating the revision and date of issue at the top border of each page. Insert the latest changed pages.

Pilot Operating Handbook – Main Part

sect.	description	document-no.	revision
0	Introduction	G3-8 MA FM 1200	07
1	General Information	G3-8 MA FM 1201	07
2	Operating Limitations	G3-8 MA FM 1202	07
3	Emergency Procedures	G3-8 MA FM 1203	07
4	Normal Procedures	G3-8 MA FM 1204	07
5	Performance	G3-8 MA FM 1205	07
6	Weight and Balance	G3-8 MA FM 1206	06
7	Systems	G3-8 MA FM 1207	06
8	Handling and Servicing	G3-8 MA FM 1208	07

Pilot Operating Handbook – Supplement

sect.	description	document-no.	revision
9	Flight Training	G3-8 MA FM 1209	07
10	Glider Towing	G3-8 MA FM 1210	07
11	Banner Towing	G3-8 MA FM 1211	04
12	Continued Airworthiness	G3-8 MA FM 1212	03
13	Abbreviated Checklists	G3-8 MA FM 1213	01

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

Introduction

Remarks and Alterations

Please make a notation below if any changes have been made to this manual or to the plane. This manual is an important document for the pilot in command to ensure safe operation of the aircraft. Therefore it is recommended to keep this Operating Handbook updated with the newest information available. You can get the latest updates of this manual from your dealer or directly from the manufacturer’s homepage.

no.	page	concern	date	sign

1 General Information

Table of Contents

sect.	description	page
1.1	Introduction	1-2
1.2	Certification	1-2
1.3	Continued Airworthiness	1-2
1.4	Quick Reference	1-3
1.5	Technical Specifications	1-3
1.6	Views	1-4
1.7	Performance	1-5
1.8	Engine	1-5
1.9	Fuel	1-6
1.10	Oil	1-6
1.11	Propeller	1-7
1.12	ICAO Designator	1-7
1.13	Noise Certification	1-7

1 General Information

1.1 Introduction

This Operating Handbook is designed to help enable a safe and successful completion of each flight with the REMOS GX. It provides you with all necessary information for regular maintenance and operation of the aircraft. Therefore we recommend that the pilot keep this Operating Handbook updated with the newest information available. You can get the latest version of this Handbook from your local dealer or directly from the manufacturer's homepage.

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

1.2 Certification

The REMOS GX was manufactured in accordance with the Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.

1.3 Continued Airworthiness

Technical publications for continued airworthiness are released on the REMOS website www.remos.com and they may be downloaded free of charge.

Bombardier-Rotax releases technical publications on their website www.flyrotax.com from which they may be downloaded free of charge. Documentation update for avionics may be downloaded on www.dynonavionics.com and www.garmin.com.

It is the responsibility of the owner/operator of the aircraft to keep the aircraft and its documentation up to date and to comply with all technical publications.

1 General Information

1.4 Quick Reference

Type:	Full composite carbon fiber aircraft with two seats.
Design:	High wing design with struts, front mounted engine and propeller, traditional stabilizer concept, differential ailerons. Electrically operated flaps (0° to 40°), electric elevator trim, three-wheel landing gear with steerable nose wheel. Main gear with hydraulic disc brakes. The cabin is equipped with two seats side by side and can be entered and exited by doors on the left and right side of the fuselage.
Layout:	Main components are built in half shells from composite fiber material, which are bonded together (carbon fiber, Kevlar and glass fiber).

1.5 Technical Specifications

wingspan	9.32 m	=	30 ft 6 in
length	6.48 m	=	21 ft 3 in
height	2.28 m	=	7 ft 5 in
wing area	10.98 m ²	=	118 sq ft
MTOW	600 kg	=	1,320 lb
wing loading	55 kg/m ²	=	11 lb/sq ft

1 General Information

1.6 Views



1 General Information

1.7 Performance

This section shall give a summary of the performance of the REMOS GX. Detailed performance data is given in section 5 of this Pilot Operating Handbook.

top speed at 3,000 ft	115 kTAS	@° 5.500 rpm	(*)
cruise speed at 3,000 ft	102 kTAS	@° 5.000 rpm	(*)
range at 3,000 ft	347 nm	@° 5,000 rpm	(*)
endurance at 3,000 ft	3,4 h	@° 5.000 rpm	(*)
rate of climb at V_X	780 ft/min	@ $V_X = 50$ kIAS	(*)
rate of climb at V_Y	840 ft/min	@ $V_Y = 60$ kIAS	(*)
stall speed clean	44 kIAS		
stall speed flaps 40 deg	42 kIAS		

[*] Sensenich or Neuform propeller, range and endurance incl. 30min reserve

1.8 Engine

manufacturer		Bombardier-Rotax
engine type		912 UL-S2
max. power	take-off	73.6 kW / 100 HP
	max. cont.	69.9 kW / 95 HP
max. engine speed	take-off	5,800 rpm
	continuous	5,500 rpm
gear ratio		2.43 : 1
coolant	type	BASF Glysantin Protect Plus/G48
	mixing ratio	see section 7

1 General Information

1.9 Fuel

total fuel quantity	84 ltr = 22 US gallons
usable fuel quantity	80 ltr = 21 US gallons
fuel qualities	fuel released by latest revision of ROTAX service instruction SI-912-016, preferably free of ethanol.

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc). Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.
------	---

1.10 Oil

engine oil	oil released by latest revision of ROTAX service instruction SI-912-016
oil rating	RON 424
engine oil capacity	min. 2.0 ltr = 2.1 qts max. 3.0 ltr = 3.1 qts
recommended oil	AeroShell Sport PLUS 4 10W-40

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc). Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.
------	---

1 General Information

1.11 Propeller

manufacturer	type and number of blades
1. Flii. Tonini	1. GT-169,5/164 2-blade, wood
2. Woodcomp	2. SR38+1 2-blade, wood
3. Sensenich	3. 2A0R5R70EN 2-blade, composite
4. Neuform	4. CR3-65-47-101,6 3-blade, composite

1.12 ICAO Designator

ICAO Designator: GX (as per ICAO Doc. 8643)

1.13 Noise Certification

According to noise requirements for Ultralight aircraft (LS-UL) dated August 1996, the REMOS GX is certified to a noise level of 60 dB (A).

1 General Information

intentionally left blank

2 Operating Limitations

Table of Contents

sect.	description	page
2.1	General	2-2
2.2	Reference Airspeeds	2-2
2.3	Airspeed Indicator Range and Markings	2-3
2.4	Stalling Speeds at Maximum Takeoff Weight	2-3
2.5	Flap Extended Speed Range	2-4
2.6	Maneuvering Speed	2-4
2.7	Never Exceed Speed	2-5
2.8	Service Ceiling	2-5
2.9	Load Factors	2-5
2.10	Approved Flight Maneuvers	2-6
2.11	Prohibited Maneuvers	2-6
2.12	Crosswind and Wind Limitations	2-6
2.13	Maximum Parachute Deploy Airspeed	2-6
2.14	Engine	2-7
2.15	Fuel	2-7
2.16	Oil	2-8
2.17	Maximum Wind Velocity for Tie-Down	2-8
2.18	Maximum Structure Temperature	2-8
2.19	Weight and Balance	2-9
2.20	Crew	2-9
2.21	Flight Conditions and Minimum Equipment List	2-10
2.22	Placards and Markings – Inside Cabin	2-12
2.23	Placards and Markings – Outside cabin	2-19

2 Operating Limitations

2.1 General

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

2.2 Reference Airspeeds

speed		IAS	description
V _{NE}	never exceed speed	135 kts	airspeed which shall never be exceeded
V _{NO}	maximum speed in turbulence	107 kts	airspeed which shall not be exceeded in gusty weather
V _O	operating maneuvering speed	59 kts 88 kts	maximum airspeed for all permissible maneuvers with 880 lb (400kg) all up weight with 1,320lb (600kg) all up weight
V _{FE}	max. speed with flaps fully extended	78 kts	airspeed which may never be exceeded with flaps down
V _{APP}	approach airspeed	60 kts	recommended airspeed for approach at gross weight
V _X	airspeed for best angle of climb	50 kts	airspeed for the steepest climb with flaps up
V _Y	airspeed for best rate of climb	60 kts	airspeed for the greatest altitude gain in the shortest time, flaps up
V _S	stall speed with flaps retracted (0°)	44 kts	stall speed at gross weight with flaps up
V _{S0}	stall speed with flaps extended (40°)	42 kts	stall speed at gross weight with flaps down

2 Operating Limitations

2.3 Airspeed Indicator Range and Markings

The following markings must be on the airspeed indicator at least. Additional markings are permissible, e.g. for recommended approach speed or for maneuvering airspeed.

marking	IAS	range	description
white arc	42...78 kts	$V_{S0} - V_{FE}$	airspeed range for flaps extended
green arc	44...107 kts	$V_S - V_{NO}$	normal use
yellow arc	107...135 kts	$V_{NO} - V_{NE}$	caution in gusty conditions
red line	135 kts	V_{NE}	maximum permissible airspeed

The yellow arc defines the “caution” range in which the aircraft should be flown with care as vertical gusts can damage the airframe structure. At V_{NO} the airframe is able to support a gust with 3.000 ft/min, at V_{NE} the vertical gust velocity is limited to 1.500 ft/min.

2.4 Stalling Speeds at Maximum Takeoff Weight

stall speed with flaps extended
stall speed with flaps retracted

$V_{S0} = 42$ kts
 $V_S = 44$ kts

2 Operating Limitations

2.5 Flap Extended Speed Range

Flaps may be operated and the aircraft may be flown at airspeeds higher than V_{FE} as long as flap deflection is limited. Following restrictions apply as a function of airspeed:

δ [deg]	V_{FE} [kts]
10	133
15	113
20	99
30	86
40	78

With flaps set to any deflection the safe load factor is limited to 2.

2.6 Maneuvering Speed

operating maneuvering speed $V_O = 88$ kIAS
with 600kg all up weight

operating maneuvering speed $V_O = 59$ kIAS
with 400kg all up weight

For any weight between 400kg and 600kg, the operating maneuvering airspeed may be interpolated linearly.

At maneuvering speed one control, i.e. **either** aileron, **or** elevator **or** rudder control, may deflected until its stop **once**. Above V_A permissible deflection is reduced, until at never exceed speed V_{NE} only one third of the deflection is permitted.

2 Operating Limitations

2.7 Never Exceed Speed

Due to the reduced density of air at altitude, true airspeed is higher than calibrated or indicated airspeed. Therefore, V_{NE} is limited to 135 kts true airspeed in order to prevent flutter. With increasing altitude V_{NE} is limited to lower values than indicated by redline according to the following table.

altitude [ft]	IAS [kts]
0	135
5,000	128
10,000	119
15,000	110

At never exceed speed V_{NE} only one third of the maximum control deflection (aileron, elevator, rudder) is permitted.

2.8 Service Ceiling

service ceiling 15,000 ft

2.9 Load Factors

safe load factors +4.0 g / -2.0 g

With flaps set to any deflection the safe load factor is limited to 2.

2 Operating Limitations

2.10 Approved Flight Maneuvers

The following maneuvers are permitted

- all non-aerobatic maneuvers, including stalls and departure stalls
- flight with the doors off

2.11 Prohibited Maneuvers

Flight maneuvers not permitted

- aerobatics
- spins
- flight in icing conditions

2.12 Crosswind and Wind Limitations

maximum demonstrated cross wind
component for take-off and landing 15 knots

The maximum demonstrated crosswind component is not a limitation. The pilot may exceed this demonstrated crosswind component on his or her own discretion. In case the pilot operates the aircraft in crosswind components higher than demonstrated he or she shall be aware of the fact that this flight regime has not been tested. A general wind limitation is not defined for the REMOS GX.

2.13 Maximum Parachute Deploy Airspeed

maximum parachute deploy airspeed 120 kts

2 Operating Limitations

2.14 Engine

manufacturer		Bombardier Recreational Products Rotax
engine type		912 UL-S2 or 912-S2
max. power	take-off	73.5 kW / 100 HP
	max. cont.	69.0 kW / 95 HP
max. engine speed	take-off	5,800 rpm
	continuous	5,500 rpm
gear ratio		2.43 : 1
exhaust gas temp	max	880°C = 1,616°F
coolant	type	BASF Glysantin Protect Plus G48
	mixing ratio	see section 7
coolant or CHT temp	min	not defined
	max	135°C = 275°F 120°C = 248°F with SB-012 complied

2.15 Fuel

usable fuel quantity		80 ltr = 21 US gallons
total fuel quantity		84 ltr = 22 US gallons
fuel qualities		Fuel released by latest revision of ROTAX service instruction SI-912-016, preferably free of ethanol.
fuel pressure	min.	0,15 bar = 2.2 psi
	max.	0,50 bar = 7.3 psi

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc).
	Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.

2 Operating Limitations

2.16 Oil

engine oil		oil released by latest revision of ROTAX service instruction SI-912-016	
oil rating		RON 424	
oil quantity	min.	2.0 ltr	= 2.1 qts
	max.	3.0 ltr	= 3.1 qts
recommended oil		AeroShell Sport PLUS 4 10W-40	
oil pressure	min.	0,8 bar = 12 psi	(below 3500rpm)
		2,0 bar = 29 psi	(above 3500rpm)
oil pressure	max.	7,0 bar	= 102 psi
oil temperature	min.	50 °C	= 120 °F
	max.	130 °C	= 266 °F

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc).
	Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.

2.17 Maximum Wind Velocity for Tie-Down

max. wind velocity for tie-down in the open $V_R = 38$ kts

2.18 Maximum Structure Temperature

max. certified structure temperature $54^{\circ}\text{C} = 130^{\circ}\text{F}$

2 Operating Limitations

2.19 Weight and Balance

front limit of C.G.	245 mm	9.6 in
rear limit of C.G.	415 mm	16.3 in
maximum take-off weight (MTOW)	600 kg	1,320 lb
max. baggage in baggage compartment	30 kg	66 lb
max. baggage in each bin	2 kg	4.4 lb
max. fuel	57 kg	126 lb

2.20 Crew

The REMOS GX is certified to be operated with a minimum of 1 occupant (the pilot in command) and a maximum of 2 occupants.

If not otherwise defined by regulations or by the owner/operator, the pilot in command is seated on the left.

2 Operating Limitations

2.21 Flight Conditions and Minimum Equipment List

operation	minimum equipment
Day-VFR	as per D-VFR Minimum Equipment List
Night-VFR	as per N-VFR Minimum Equipment List
IFR in IMC	not approved
IFR in VMC	as per IFR/VMC Minimum Equipment List
Aerobatics	not approved

D-VFR minimum equipment list

- engine ROTAX 912 UL-S
- silencer
- airbox
- propeller as defined in chapter 2
- carburetor heating system
- compass with compass card
- altimeter
- airspeed indicator
- safety belts
- ELT
- electrical system including circuit breakers
- master, avionics and engine kill (ignition) switch
- engine instruments (one DYNON SkyView screen and the EMS module DYNON SV-EMS-220)

2 Operating Limitations

N-VFR Minimum equipment list

- as per D-VFR minimum equipment list, plus
- ADAHRS module DYNON SV-ADAHRS-200 in order to drive the integrated artificial horizon of the SkyView system)
- instrument panel lighting
- taillight
- navigation lights
- strobe lights
- landing light
- communication radio
- transponder

IFR/VMC Minimum equipment list

- as per N-VFR minimum equipment list, plus
- navigation radio
- audio panel or intercom

2 Operating Limitations

2.22 Placards and Markings Inside Cabin



The placards and markings feature the following color codes.

Type	Inside
Information	white lettering on a black background - white framed
	
Safety	white lettering on a black background - red framed
	
Warning	white lettering on a red background - white framed
	

The following list does not define the layout but the content and intent of the placards.

2 Operating Limitations

The following information placards are installed inside the cabin. Installation of these placards is **mandatory**.

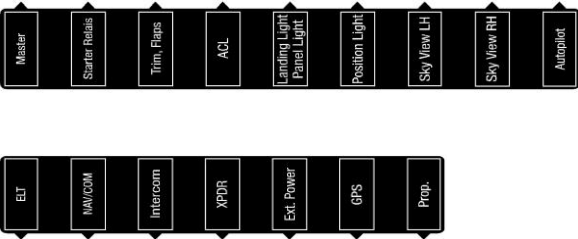placards	location
	left cockpit not with oil thermostat installed
	center console actual callsign of aircraft
	switchboard
	switchboard
	switchboard
	switchboard
	right cockpit labelling of CBs may vary with equipment installed

2 **Operating Limitations**


placards	location
 A rectangular black placard with a white border. It contains the text "Parking Brake release" at the top. Below the text is a white icon of a parking brake lever with an upward-pointing arrow. To the right of the icon is a white arrow pointing right, enclosed in a rounded rectangle, with the word "Set" below it.	center console
 A trapezoidal black placard with a white border. It contains the text "Use Only DOT-4 Brake Fluid" at the top. Below this is a horizontal line, followed by the text "To Set Parking Brake". Underneath are three numbered steps: "1. Release Brake Valve", "2. Push Brake Lever", and "3. Rotate Brake Lever Clockwise (90°)".	center console
 Two circular placards. The left one is yellow with a black border and contains the text "Carb. Heat". The right one is black with a white border and contains the text "Oil Temp.".	on knob oil temp placard not with oil thermostat installed

2 Operating Limitations

The following safety placards are installed inside the cabin. Installation of these placards is **mandatory**.


placard	location
Aerobatics and IMC-Flights PROHIBITED NO INTENTIONAL SPINS	left cockpit above left cockpit screen
Monitor towing Speed!	left cockpit above left cockpit screen installed in combination with towing clutch only
CHECK: Flight System Control & Three Quick Fasteners	center stack on top of center stack
Passenger Warning This Aircraft was manufactured in accordance with Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.	right cockpit above right cockpit screen
NO SMOKING	hatrack between baggage nets
FUEL EMPTY ←	fuel tank sight hose indicating minimum fuel level
When articulating sun visors TAKE CARE not to interfere with ballistic parachute DEPLOYMENT HANDLE when installed  Ballistic Parachute Deployment Handle Emergency Use Only	cabin ceiling at recovery system release handle when recovery system is installed
← Check Three ↑ Quick Fasteners →	aileron pushrod

2 **Operating Limitations**

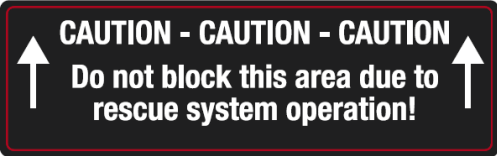placard	location
	aileron pushrod cut out
	baggage compartment when recovery system is installed

2 Operating Limitations

The following warning placards are installed inside the cabin. Installation of these placards is **mandatory**.

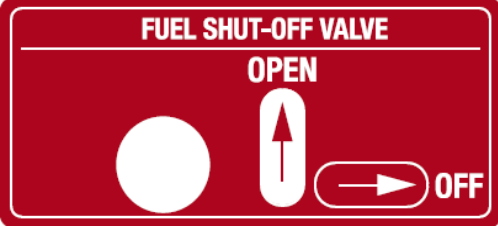placards	location
 A red rectangular placard with rounded corners. At the top, it reads 'FUEL SHUT-OFF VALVE'. Below this, the word 'OPEN' is centered above a white vertical lever with an upward-pointing arrow. To the left of the lever is a white circle. To the right is a white button with a right-pointing arrow and the word 'OFF'.	center console
 A red rectangular placard with rounded corners. It contains the text 'Emergency Jettison' in white, followed by a white right-pointing arrow.	door
 A red rectangular placard with rounded corners. It features a white left-pointing arrow followed by the word 'Open', and the word 'Close' followed by a white right-pointing arrow.	door

2 Operating Limitations

The following information placards and markings are found inside the cabin. Attaching these placards is not mandatory; these placards provide additional information to the pilot.

placards	location
	right cockpit
 	baggage compartment metric units acceptable
	switchboard
	switchboard
	switchboard
	switchboard
	on knob

2 Operating Limitations

2.23 Placards and Markings Outside Cabin

The placards and markings feature the following color codes.

Type	Outside
Information	black lettering on a white background - black framed
	Information
Safety	red lettering on a white background - red framed
	Safety
Warning	red lettering on a white background - red framed
	! Warning !

The following list does not define the layout but the content and intent of the placards.

2 Operating Limitations

The following information placards are installed outside the cabin. Installation of these placards is **mandatory**.

placards	location
	fuel tank filler cap metric units acceptable

2 Operating Limitations

The following safety placards are installed outside the cabin. Installation of these placards is **mandatory**.

placards	location
	center of elevator
	next to the opening for aileron pushrod, covered by wing if not folded
	center of fixed surface of elevator, covered if elevator is installed

The following warning placards are installed outside the cabin. Installation of these placards is **mandatory**.

placards	location
	recovery system egress area when recovery system installed

2 Operating Limitations

The following information placards and markings are found outside the cabin. Attaching these placards is not mandatory; these placards provide additional information to the pilot.

placards	location
2,0 BAR MAX 29 PSI MAX 2,4 BAR MAX 34 PSI MAX	wheel fairings placard set with one unit only acceptable
	static ports

The following safety placards and markings are found outside the cabin. Attaching these placards is not mandatory; these placards provide additional information to the pilot.

placards	location
! WARNING ! Before removing wing bolt disconnect aileron rod-connection!	wing main bolt
! WARNING ! Wing not foldable !	wing when wing folding mechanism not installed
Do not lift	strut

3 Emergency Procedures

Table of Content

sect.	description	page
3.1	Definitions	3-2
3.2	Jettison of Doors	3-3
3.3	Spin Recovery	3-3
3.4	Recovery System	3-3
3.5	Emergency Descent	3-4
3.6	Carburetor Icing	3-4
3.7	Inadvertent Icing Encounter	3-4
3.8	Overvoltage	3-4
3.9	Generator Failure	3-5
3.10	Voltage Drop	3-5
3.11	Loss of Altimeter	3-6
3.12	Loss of Airspeed Indicator	3-7
3.13	Loss of Elevator Control	3-8
3.14	Loss of Aileron Control	3-9
3.15	Loss of Rudder Control	3-10
3.16	Loss of Trim System	3-11
3.17	Loss of Flap Control System	3-12
3.18	Loss of Oil Pressure	3-13
3.19	High Oil Pressure	3-14
3.20	High Cylinder Head Temperature	3-15
3.21	Engine Stoppage during Take-Off	3-16
3.22	Engine Stoppage in Flight	3-17
3.23	Engine on Fire During Start-Up	3-17
3.24	Engine on Fire During Take-Off	3-18
3.25	Engine on Fire in Flight	3-19
3.26	Precautionary Landing	3-20
3.27	Emergency Landing on Land	3-21
3.28	Emergency Landing on Water	3-22

3 Emergency Procedures

3.1 Definitions

Procedures

are instructions that must be performed in the given sequence, as far as possible without interruption.

Checklists

are lists for items to be checked in the applicable phase of flight (taxi, take-off, climb, etc.). Timing and sequence of the steps to be executed may vary according to the individual flight.

Briefings

are guidelines for upcoming procedures. With the help of briefings, the pilot and passenger should recapitulate those procedures.

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

3 Emergency Procedures

3.2 Jettison of Doors Procedure

- | | |
|--------------|----------|
| 1. door lock | OPEN |
| 2. hinge pin | PULL |
| 3. door | JETTISON |

3.3 Spin Recovery Procedure

- | | |
|-------------------------------|-------------------------|
| 1. engine | IDLE |
| 2. aileron | NEUTRAL |
| 3. rudder | OPPOSITE SPIN DIRECTION |
| 4. elevator | PUSH |
| 5. after stopping of rotation | RECOVER |

3.4 Recovery System Procedure

- | | |
|----------------------|----------------------|
| 1. engine | STOP |
| 2. recovery system | RELEASE |
| 3. fuel valve | CLOSE |
| 4. declare emergency | MAYDAY MAYDAY MAYDAY |
| 5. master switch | OFF |
| 6. safety belts | TIGHTEN |

3 Emergency Procedures

3.5 Emergency Descent Procedure

- | | |
|--------------------------|----------|
| 1. engine | IDLE |
| 2. flaps | UP |
| 3. carburetor heat | PULL |
| 4. electric fuel pump | ON |
| 5. airspeed in rough air | 107 KIAS |
| airspeed in calm air | 135 KIAS |

3.6 Carburetor Icing Procedure

- | | |
|-----------------------|------------|
| 1. carburetor heat | PULL |
| 2. electric fuel pump | ON |
| 3. power setting | FULL POWER |

3.7 Inadvertent Icing Encounter Procedure

- | | |
|-----------------------|--------------------------|
| 1. engine | FULL POWER |
| 2. flaps | UP |
| 3. carburetor heat | PULL |
| 4. electric fuel pump | ON |
| 5. heading change | BACKTRACK |
| 6. descent | LEAVING ICING CONDITIONS |
| 7. altitude | KEEP SAFE ALTITUDE |

3.8 Overvoltage Procedure

- | | |
|---------------------------------|------------------------|
| 1. overvoltage | IDENTIFY VOLTAGE > 15V |
| 2. master switch | OFF |
| 3. land on appropriate airfield | |

3 Emergency Procedures

3.9 Generator Failure

Procedure

1.

alternator failure

IDENTIFY (red alarm light)
2.

non essential systems

OFF
3.

continue flight and land on appropriate airfield to determine the reason for the alternator failure

NOTE	During day VFR Operations, nonessential systems are all systems except for the radio and intercom. During night VFR or IFR operations, essential systems also include transponder, areal navigation (GPS or NAV/COMM), instrument lights, position lights, ACL and the artificial horizon (applies as well do the DYNON glass cockpit avionics instead of the artificial horizon).
------	--

3.10 Voltage Drop

Procedure

1.

engine speed

MORE THAN 4.000 RPM
2.

non essential systems

OFF
3.

continue flight and land on appropriate airfield to determine the reason for the voltage drop

NOTE	During day VFR Operations, nonessential systems are all systems except for the radio and intercom. During night VFR or IFR operations, essential systems also include transponder, areal navigation (GPS or NAV/COMM), instrument lights, position lights, ACL and the artificial horizon (applies as well do the DYNON glass cockpit avionics instead of the artificial horizon).
------	--

3 Emergency Procedures

3.11 Loss of Altimeter Procedure

for aircraft with more than one altimeter installed

1. AVIATE – NAVIGATE – COMMUNICATE
2. altimeter USE ALTERNATE ALTIMETER
3. in case of failure of all altimeters installed continue with procedure below

aircraft with just one altimeter and within airspace requiring clearance

1. radio communication INFORM ATC
2. instructions by ATC ACT ACCORDINGLY
3. continue flight and land on appropriate airfield to determine the reason for the altimeter failure

aircraft with just one altimeter but outside airspace requiring clearance

1. altitude KEEP SAFE ALTITUDE
2. instructions by ATC ACT ACCORDINGLY
3. continue flight and land on appropriate airfield to determine the reason for the altimeter failure

3 Emergency Procedures

3.12 Loss of Airspeed Indicator Procedure

for aircraft with more than one airspeed indicator installed

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. airspeed indicator USE ALTERNATE ASI
- 3. in case of failure of all airspeed indicators installed continue with procedure below

for aircraft with one airspeed indicator installed or total failure of ASI

- 1. engine speed in cruise 4.200...4.600 rpm

landing without airspeed indicator

- 1. airfield APPROPRIATE RWY LENGTH
- 2. flaps UP
- 3. carburetor heat PULL
- 4. electric fuel pump ON
- 5. engine speed in decent 2.500...3.000 rpm
- 6. pitch KEEP WITHIN estd. +/-10 deg
- 7. short final approach POWER IDLE
- 8. flare AS APPROPRIATE
- 9. touch down on main wheels first with very little flare.
- 10. brakes IMMEDIATELY

NOTE	Landing distance with this procedure is significantly longer than a standard landing. Expect distances far in excess of 2.000 ft / 600m or even more. Select an airfield with sufficient runway length available.
------	---

3 Emergency Procedures

3.13 Loss of Elevator Control Procedure

aircraft equipped with recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. recovery system DEPLOY

aircraft without recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. power setting FOR LEVEL FLIGHT
- 4. elevator control USE TRIM SYSTEM
- 5. landing EMERGENCY LANDING

NOTE	With a failed elevator control the aircraft might be controlled with the trim system. Pitch control is extremely limited. Engine power control might support pitch control.
NOTE	stuck/blocked elevator control UP trim will result in a nose down response DOWN trim will result in a nose up response disconnected/floating elevator control UP trim will result in a nose up response DOWN trim will result in a nose down response
WARNING	Loss of elevator control is an extremely severe situation that might result in loss of control of the aircraft, serious injuries or even death.

3 Emergency Procedures

3.14 Loss of Aileron Control Procedure

aircraft equipped with recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. recovery system DEPLOY

aircraft without recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. power setting FOR LEVEL FLIGHT
- 4. control USE RUDDER CONTROL
- 5. landing EMERGENCY LANDING

NOTE	With a failed aileron control the aircraft might be controlled with the rudder control resulting in excessive sideslip conditions.
------	--

WARNING	Loss of aileron control is an extremely severe situation that might result in loss of control of the aircraft, serious injuries or even death.
---------	--

3 Emergency Procedures

3.15 Loss of Rudder Control Procedure

aircraft equipped with recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. recovery system DEPLOY

aircraft without recovery system

- 1. AVIATE – NAVIGATE – COMMUNICATE
- 2. declare emergency MAYDAY MAYDAY MAYDAY
- 3. power setting FOR LEVEL FLIGHT
- 4. control USE AILERON CONTROL
- 5. landing EMERGENCY LANDING

NOTE	With a failed rudder control the aircraft might be controlled with the aileron control resulting in excessive sideslip conditions.
------	--

WARNING	Loss of rudder control is an extremely severe situation that might result in loss of control of the aircraft, serious injuries or even death.
---------	---

3 Emergency Procedures

3.16 Loss of Trim System Procedure

pitch down trim runaway or stuck trim with lot of trim down

1. AVIATE – NAVIGATE – COMMUNICATE
2. expect nose down attitude
3. keep nose up with manual stick input
4. release trim circuit breaker
5. expect higher stick forces than usual
6. continue flight and land on appropriate airfield to determine the reason for the trim system failure

pitch up trim runaway or stuck trim with lot of trim up

1. AVIATE – NAVIGATE – COMMUNICATE
2. expect nose up attitude
3. keep nose level with manual stick input
4. release trim circuit breaker
5. expect higher stick forces than usual
6. continue flight and land on appropriate airfield to determine the reason for the trim system failure

NOTE

The aircraft is controllable even with a complete trim runaway. Keep your airspeed below V_{NO} to keep stick forces within reasonable limits.

3 Emergency Procedures

3.17 Loss of Flaps Control System Procedure

flaps stuck in deflected position or flaps down runaway

1. AVIATE – NAVIGATE – COMMUNICATE
2. max. flap speed $V_{FE} = 78$ KIAS
3. approach airspeed $V_{APP} = 60$ KIAS
4. return to airfield or continue flight and land on appropriate airfield to determine the reason of the failure

flaps stuck in retracted position or flaps up runaway

1. AVIATE – NAVIGATE – COMMUNICATE
2. stall speed $V_S = 44$ KIAS
3. approach airspeed $V_{APP} = 60$ KIAS
4. return to airfield or continue flight and land on appropriate airfield to determine the reason of the failure

NOTE

Keep in mind that landing distances presented in section 5 of this POH are applicable to the normal landing procedure. Landing with flaps up will result in longer landing distances.

3 Emergency Procedures

3.18 Loss of Oil Pressure Procedure

oil temperature not stable (constantly and rapidly rising)

smell of oil, oil fumes, oil on windscreen

5. AVIATE – NAVIGATE – COMMUNICATE
6. PERFORM PRECAUTIONARY LANDING

oil temperature stable (constant oil temperature)

no obvious oil leakage, engine running smooth

1. monitor oil temperature STABLE
2. coolant or CHT temp max. 135°C = 275°F
max. 120°C = 248°F (w/ SB-012)
3. oil temperature 50...130°C = 120...266°F
4. continue flight and land on appropriate airfield to determine the reason for the indicated oil pressure loss

WARNING

Loss of oil pressure may be a result of an oil leakage. This is an extremely dangerous situation as it implies the immediate danger of an in-flight fire. Be sensitive to any kind of abnormal smell or fire. Be prepared for an immediate precautionary landing, maybe emergency landing!

3 Emergency Procedures

3.19 High Oil Pressure Procedure

oil temperature not stable (constantly and rapidly rising)

smell of oil, oil fumes, oil on windscreen

1. AVIATE – NAVIGATE – COMMUNICATE
2. PERFORM PRECAUTIONARY LANDING

oil temperature stable (constant oil temperature)

no obvious oil leakage, engine running smooth

1. monitor oil temperature STABLE
2. coolant or CHT temp max. 135°C = 275°F
max. 120°C = 248°F (w/ SB-012)
3. oil temperature 50...130°C = 120...266°F
4. continue flight and land on appropriate airfield to determine the reason for the indicated high oil pressure

WARNING

High oil pressure may result in an oil leakage. This is an extremely dangerous situation as it implies the immediate danger of an in-flight fire. Be sensitive to any kind of abnormal smell or fire. Be prepared for an immediate precautionary landing, maybe emergency landing!

3 Emergency Procedures

3.20 High Cylinder Head Temperature Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. power setting REDUCE TO MIN. POSSIBLE
3. continue flight and land on appropriate airfield to determine the reason of the high cylinder head temperature
4. record max. observed temperature and duration

NOTE	The engine has water cooled cylinder heads. Therefore a failure of the cooling system does not imply immediate danger of engine failure.
-------------	--

NOTE	In case cylinder head temperature can be kept within limits (275°F = 135°C or 248°F = 120°C w/ SB-012) flight can be continued to planned destination.
-------------	--

NOTE	In case cylinder head temperature rises uncontrollable be prepared for precautionary landing, although the engine is not expected to stop suddenly.
-------------	---

NOTE	The ROTAX manual gives advice for inspection and release to service after such an occurrence.
-------------	---

3 Emergency Procedures

3.21 Engine Stoppage during Take-Off Procedure

during take-off run (aborted take-off)

- | | |
|-----------------|-------------|
| 1. engine speed | IDLE |
| 2. brakes | AS REQUIRED |
| 3. engine | OFF |

during climb out (altitude below 500ft)

- | | |
|------------------------------------|----------------------|
| 1. AVIATE – NAVIGATE – COMMUNICATE | |
| 2. engine speed | IDLE |
| 3. engine | OFF |
| 4. fuel valve | CLOSE |
| 5. declare emergency | MAYDAY MAYDAY MAYDAY |
| 6. master switch | OFF |
| 7. safety belts | TIGHTEN |
| 8. emergency landing | APPROPRIATE TERRAIN |

NOTE	No course deviations should be made in excess of 30° to the left or right. Do not return to the airfield.
------	---

3 Emergency Procedures

3.22 Engine Stoppage in Flight Procedure

case 1: altitude not enough for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. engine OFF
4. fuel valve CLOSE
5. declare emergency MAYDAY MAYDAY MAYDAY
6. master switch OFF
7. safety belts TIGHTEN
8. emergency landing APPROPRIATE TERRAIN

case 2: altitude sufficient for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. electric fuel pump ON
4. choke OFF
5. starter ENGAGE
6. if engine does not start continue with case 1
7. if engine starts, continue flight and land on appropriate airfield to determine the reason for engine failure

3.23 Engine on Fire During Start-Up Procedure

1. fuel valve CLOSE
2. carburetor heat PULL
3. electric fuel pump OFF
4. power setting FULL until ENGINE STOPS
5. master switch OFF
6. if fire does not extinguish VACATE IMMEDIATELY

3 Emergency Procedures

3.24 Engine on Fire During Take-Off Procedure

during take-off run (aborted take-off)

- | | |
|--------------------------------|-------------------------|
| 1. engine speed | IDLE |
| 2. brakes | FULL and SET |
| 3. fuel valve | CLOSE |
| 4. carburetor heat | PULL |
| 5. electric fuel pump | OFF |
| 6. power setting | FULL until ENGINE STOPS |
| 7. master switch | OFF |
| 8. if fire does not extinguish | VACATE IMMEDIATELY |

during climb out (altitude below 500ft)

- | | |
|------------------------------------|----------------------|
| 1. AVIATE – NAVIGATE – COMMUNICATE | |
| 2. engine speed | IDLE |
| 3. engine | OFF |
| 4. fuel valve | CLOSE |
| 5. carburetor heat | PULL |
| 6. declare emergency | MAYDAY MAYDAY MAYDAY |
| 7. master switch | OFF |
| 8. safety belts | TIGHTEN |
| 9. emergency landing | APPROPRIATE TERRAIN |

NOTE	No course deviations should be made in excess of 30° to the left or right. Do not return to the airfield.
------	---

WARNING	Never release the recovery system in case of fire.
---------	--

3 Emergency Procedures

3.25 Engine on Fire in Flight Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. fuel valve CLOSE
4. carburetor heat PULL
5. electric fuel pump OFF
6. power setting FULL until ENGINE STOPS
7. declare emergency MAYDAY MAYDAY MAYDAY
8. master switch OFF
9. descent EMERGENCY DECENT
10. slip AS REQUIRED
11. safety belts TIGHTEN
12. emergency landing APPROPRIATE TERRAIN

WARNING

Never release the recovery system in case of fire.

3 Emergency Procedures

3.26 Precautionary Landing Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. direction of wind IDENTIFY
4. landing direction INTO THE WIND or UPHILL
5. landing site inspection PERFORM LOW APPROACH
6. approach airspeed $V_{APP} = 60$ KIAS
7. max. flap speed $V_{FE} = 78$ KIAS
8. declare emergency OWN DISCRETION
9. safety belts TIGHTEN
10. flaps DOWN
11. landing light RECOMMENDED
12. engine power AS REQUIRED
13. elevator trim AS REQUIRED
14. electric fuel pump ON
15. carburetor heat RECOMMENDED
16. oil cooler flap AS REQUIRED
17. coolant or CHT temp max. $135^{\circ}\text{C} = 275^{\circ}\text{F}$
max. $120^{\circ}\text{C} = 248^{\circ}\text{F}$ (w/ SB-012)
18. oil temperature $50...130^{\circ}\text{C} = 120...266^{\circ}\text{F}$
19. touch down on main wheels first with very little flare.
20. brakes IMMEDIATELY
21. avionics switch OFF
22. landing light OFF
23. position lights OFF
24. engine OFF
25. ACL OFF
26. cockpit lights OFF
27. master switch OFF
28. recovery system SECURED
29. parking brake SET

3 Emergency Procedures

3.27 Emergency Landing on Land Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. direction of wind IDENTIFY
4. approach airspeed $V_{APP} = 60$ KIAS
5. max. flap speed $V_{FE} = 78$ KIAS
6. flaps DOWN
7. trim AS REQUIRED
8. declare emergency MAYDAY MAYDAY MAYDAY
9. master switch OFF
10. safety belts TIGHTEN
11. landing direction INTO THE WIND
or UPHILL
12. touchdown with full elevator on main wheels first
13. after landing, release safety belts and vacate aircraft

3 Emergency Procedures

3.28 Emergency Landing on Water Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. direction of wind IDENTIFY
3. approach airspeed $V_{APP} = 60$ KIAS
4. max. flap speed $V_{FE} = 78$ KIAS
5. flaps DOWN
6. trim AS REQUIRED
7. declare emergency MAYDAY MAYDAY MAYDAY
8. master switch OFF
9. safety belts TIGHTEN
10. doors JETTISON
11. touchdown with full elevator on water surface
12. after landing release safety belts and vacate aircraft

4 Normal Procedures

Table of Content

sect.	description	page
4.1	Definitions	4-2
4.2	Fuel Draining	4-3
4.3	Preflight Check	4-4
4.4	Before Start-Up	4-7
4.5	Engine Start	4-7
4.6	After Start-Up	4-8
4.7	Engine Run Up	4-8
4.8	Taxi	4-9
4.9	Departure	4-9
4.10	Take-Off	4-10
4.11	Best Angle of Climb Speed (V_X)	4-13
4.12	Best Rate of Climb Speed (V_Y)	4-13
4.13	Cruise	4-14
4.14	Flying in Rain	4-15
4.15	Flying Without Doors	4-16
4.16	Recovery from Stall	4-17
4.17	Descent	4-17
4.18	Approach	4-18
4.19	Landing	4-19
4.20	Balked Landing	4-21
4.21	After Landing	4-21
4.22	Shutdown	4-21

4 Normal Procedures

4.1 Definitions

Procedures

are instructions that must be performed in the given sequence, as far as possible without interruption.

Checklists

are lists for items to be checked in the applicable phase of flight (taxi, take-off, climb, etc.). Timing and sequence of the steps to be executed may vary according to the individual flight.

Briefings

are guidelines for upcoming procedures. With the help of briefings, the pilot and passenger should recapitulate those procedures.

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

4 Normal Procedures

4.2 Fuel Draining Procedure

Since auto fuel contains a significant amount of ethanol nowadays, draining of the fuel system is more and more important. Draining of the aircraft must be performed before moving the aircraft at all. After re-fueling the aircraft, draining is also required. Give the fuel several minutes to rest after filling it up and do not move the aircraft prior to draining.

The drainer is located underneath the belly, just behind the main landing gear. From the outside only a plastic hose with 0.5 in diameter is visible. To drain the fuel tank, press on the plastic hose. Capture the released fuel and analyze it for water.

If AVGAS or MOGAS is used, water will clearly deposit underneath the fuel. Continue draining until no more water can be detected.

In the case of auto fuel containing ethanol, water can be absorbed by the fuel up to a certain amount, so no water will be detected during draining. If the fuel looks like a milky dispersion, the fuel is saturated with water. In this case dump all of the fuel, do not use this fuel for flying! After dumping fuel, fill up the fuel tank completely with fuel without ethanol.

To dump fuel, press in the plastic drainer hose and turn it counter-clockwise (as seen from bottom) about $\frac{1}{4}$ of a turn. To close the drainer, turn the plastic hose back. Be sure the drainer is properly closed. If dust or dirt particles get inside the drainer, the drainer will not close properly. In this case, open the drainer again to clean the drainer.

When draining the aircraft take care that no fuel contaminates the environment. Dispose of drained or dumped fuel in an environmental correct manner.

For further information about fuel containing ethanol please refer to the REMOS Notification NOT-001-ethanol-fuel.

4 Normal Procedures

4.3 Preflight Check

Checklist


Checks outside the aircraft

1. fuel system drained before moving the aircraft at all
2. engine oil level (between min. and max. markings)
3. level of engine coolant (between min. and max. markings)
4. cowling is closed and properly secured
5. propeller has no damage or wear
6. nose gear and wheel/tire have no damage or wear, air pressure is correct and suspension is free
7. static port is clean
8. main wing bolt properly secured with Fokker needle
9. pitot tube is clean and properly fixed
10. wingtip and cover glass are securely mounted and not damaged
11. aileron, linkage and hinges have free travel and no damage, counterweights are securely fixed
12. upper wing strut attachment is secured
13. flap, linkage and hinges have no damage, rubber stops (flutter damper) on outer hinges are in place
14. lower wing strut attachment is secured
15. belly top antennas are securely mounted and free of damage
16. left main gear and wheel/tire have no damage or wear, air pressure is correct and suspension is free
17. cover of ejection opening has no damage
18. top antennas are securely mounted and free of damage
19. fuselage has no damage
20. horizontal tail, elevator, linkage and hinges have free travel and no damage
21. trim actuator linkage securely mounted and not damaged
22. elevator quick-fastener is securely locked
23. rudder linkage and hinges have free travel and no damage
24. horizontal tail attachment bolts are secured
25. horizontal tail, elevator, linkage and hinges have free travel and no damage

4 Normal Procedures

26. fuselage has no damage
27. right main gear and wheel/tire have no damage or wear, air pressure is correct and suspension is free
28. lower wing strut attachment is secured
29. flap, linkage and hinges have no damage, rubber stops (flutter damper) on outer hinges are in place
30. upper wing strut attachment is secured
31. aileron, linkage and hinges have free travel and no damage , counterweights are securely fixed
32. wingtip and cover glass are securely mounted and not damaged
33. landing light glass is not damaged
34. static port is clean
35. main wing bolt properly secured with Fokker needle

It is suggested to perform the outside check according to the following flow diagram:

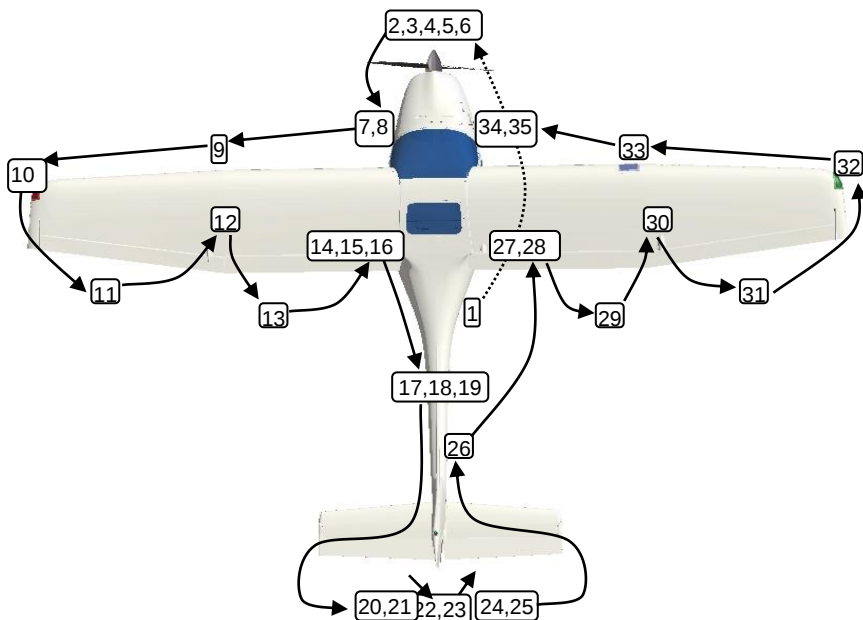

Insecurely connected, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!!

4 Normal Procedures

Checks inside the aircraft

1. aileron quick-fasteners are securely locked
2. enough fuel on board for the flight
3. both seats are properly secured in intended position
4. both doors can be locked
5. check proper functioning of the flap drive and gauge

Insecurely connected, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!!

4 Normal Procedures

4.4 Before Start-Up Checklist

- | | |
|--------------------|----------|
| 1. doors | LOCKED |
| 2. safety belts | FASTENED |
| 3. parking brake | SET |
| 4. recovery system | ARMED |
| 5. fuel valve | OPEN |

4.5 Engine Start Procedure

cold engine

- | | |
|-------------------------------|--------------------|
| 1. master switch | ON |
| 2. anti-collision-light (ACL) | ON |
| 3. oil cooler flap | CLOSED |
| 4. electric fuel pump | ON |
| 5. engine power | CRACKED OPEN |
| 6. choke | PULL |
| 7. propeller | FREE |
| 8. starter | ENGAGE max.10 sec. |

warm engine

- | | |
|-------------------------------|--------------------|
| 1. master switch | ON |
| 2. anti-collision-light (ACL) | ON |
| 3. oil cooler flap | AS REQUIRED |
| 4. electric fuel pump | ON |
| 5. engine power | CRACKED OPEN |
| 6. choke | OFF |
| 7. propeller | FREE |
| 8. starter | ENGAGE max.10 sec. |

NOTE

Do not hold the key in the “START” position for more than 10 seconds, in order to avoid overheating the starter. If the engine does not start, release the key to position “0”, wait 2 minutes and repeat the procedure.

4 Normal Procedures

4.6 After Start-Up Procedure

- | | |
|------------------------------|----------------------|
| 1. engine has started | STARTER DISENGAGE |
| 2. choke | OFF |
| 3. oil pressure | OK |
| 4. position-lights | ON |
| 5. avionics switch | ON |
| 6. intercom | ON |
| 7. radios | ON and FREQUENCY SET |
| 8. transponder | AS REQUIRED |
| 9. electric fuel pump | OFF |
| 10. engine speed for warm-up | 2,500 rpm |

NOTE

By having the electric fuel pump switched off after starting the engine, only the mechanical pump is providing the engine with fuel. Make sure that the engine is running without the electric pump for at least two minutes. In that time, the engine burns all fuel in the fuel system behind the mechanical fuel pump. If the engine keeps running, the mechanical fuel pump is operational.

4.7 Engine Run Up Checklist

- | | |
|-----------------------|-------------------|
| 1. oil temperature | min. 50°C / 120°F |
| 2. engine speed | 4,000 rpm |
| 3. magneto check | max. 300 rpm DROP |
| 4. carburetor heat | TEMPERATURE RISES |
| 5. engine speed | IDLE |
| 6. electric fuel pump | ON |

4 Normal Procedures

4.8 Taxi Procedure

- | | |
|----------------------|-----------------|
| 1. landing light | RECOMMENDED |
| 2. parking brake | RELEASE |
| 3. engine speed | AS REQUIRED |
| 4. control on ground | VIA PEDALS |
| 5. min. turn radius | ca. 20 ft = 7 m |
| 6. braking | AS REQUIRED |
| 7. taxi speed | APPROPRIATE |

4.9 Departure Briefing

- | | |
|------------------------------|----------------------|
| 1. wind, weather, visibility | OK |
| 2. ATIS | CHECKED |
| 3. runway | CORRECT DIRECTION |
| 4. traffic pattern | ALTITUDE and ROUTING |

4 Normal Procedures

4.10 Take-Off Procedure

standard take-off

- | | |
|-----------------------|-------------|
| 1. oil cooler flap | AS REQUIRED |
| 2. carburetor heat | OFF |
| 3. electric fuel pump | ON |
| 4. flaps | UP |
| 5. elevator trim | 2/3 UP |
| 6. rudder and aileron | NEUTRAL |
| 7. engine power | FULL POWER |
| 8. rotate | 45 KIAS |
| 9. lift-off | 50 KIAS |
| 10. steepest climb | 50 KIAS |
| 11. best climb | 60 KIAS |

NOTE

Take-off distances given in chapter 5 have been determined with this procedure. Take-off distance varies significantly with precise handling and condition of the runway.

NOTE

It is recommended to keep the electric fuel pump switched on during the entire flight.

NOTE

Take-off with reduced power is possible, though not recommended. No take-off shall be performed with engine speed lower than 4,000 rpm. A drastically reduced take-off performance must be taken into account.

NOTE

Take-off with flaps 15deg is possible and permitted. Take-off distance is presented in section 5. In order to reduce pilot workload, it is recommended to take-off with flaps on grass only (soft or short field take-off).

4 Normal Procedures

short field take-off

- | | |
|-------------------------|---------------|
| 1. oil cooler flap | AS REQUIRED |
| 2. carburetor heat | OFF |
| 3. electric fuel pump | ON |
| 4. brakes | SET |
| 5. flaps | 15 deg |
| 6. elevator trim | 2/3 UP |
| 7. rudder and aileron | NEUTRAL |
| 8. engine power | FULL POWER |
| 9. brakes | RELEASE |
| 10. rotate and lift-off | 45 KIAS |
| 11. steepest climb | 50 KIAS |
| 12. best climb | 60 KIAS |
| 13. retract flaps | SAFE ALTITUDE |
| 14. best climb | 60 KIAS |

NOTE

Take-off distances given in chapter 5 have not been determined with this procedure, but with the procedure for standard take-off. Take-off distance with the short field technique varies significantly with precise handling and condition of the runway.

NOTE

Take care not to stall the aircraft during this maneuver.

NOTE

It is recommended to keep the electric fuel pump switched on during the entire flight.

4 Normal Procedures

soft field take-off

- | | |
|-----------------------|------------------|
| 1. oil cooler flap | AS REQUIRED |
| 2. carburetor heat | OFF |
| 3. electric fuel pump | ON |
| 4. brakes | SET |
| 5. flaps | 15 deg |
| 6. elevator trim | 2/3 UP |
| 7. rudder and aileron | NEUTRAL |
| 8. engine power | FULL POWER |
| 9. brakes | RELEASE |
| 10. rotate | IMMEDIATELY |
| 11. lift-off | 35 KIAS |
| 12. accelerate | IN GROUND EFFECT |
| 13. steepest climb | 50 KIAS |
| 14. best climb | 60 KIAS |
| 15. retract flaps | SAFE ALTITUDE |
| 16. best climb | 60 KIAS |

NOTE

Take-off distances given in chapter 5 have not been determined with this procedure, but with the procedure for standard take-off. Take-off distance with the soft field technique varies significantly with precise handling and condition of the runway.

NOTE

Take care not to stall the aircraft during this maneuver.

NOTE

It is recommended to keep the electric fuel pump switched on during the entire flight.

4 Normal Procedures

4.11 Best Angle of Climb Speed (V_x) Checklist

- | | |
|------------------------|--|
| 1. flaps | 15deg or CLEAN |
| 2. electric fuel pump | ON |
| 3. steepest climb | $V_x = 50$ KIAS |
| 4. engine power | FULL POWER |
| 5. carburetor heat | OFF |
| 6. oil cooler flap | AS REQUIRED |
| 7. coolant or CHT temp | max. $135^{\circ}\text{C} = 275^{\circ}\text{F}$
max. $120^{\circ}\text{C} = 248^{\circ}\text{F}$ (w/ SB-012) |
| 8. oil temperature | $50...130^{\circ}\text{C} = 120...266^{\circ}\text{F}$ |

NOTE

Best angle of climb is achieved with flaps 15deg.

4.12 Best Rate of Climb Speed (V_y) Checklist

- | | |
|------------------------|--|
| 1. flaps | 15deg or CLEAN |
| 2. electric fuel pump | ON |
| 3. best climb | $V_y = 60$ KIAS |
| 4. engine power | FULL POWER |
| 5. carburetor heat | OFF |
| 6. oil cooler flap | AS REQUIRED |
| 7. coolant or CHT temp | max. $135^{\circ}\text{C} = 275^{\circ}\text{F}$
max. $120^{\circ}\text{C} = 248^{\circ}\text{F}$ (w/ SB-012) |
| 8. oil temperature | $50...130^{\circ}\text{C} = 120...266^{\circ}\text{F}$ |

NOTE

Best rate of climb is achieved with flaps up.

4 Normal Procedures

4.13 Cruise

Checklist

- | | |
|----------------------------|--|
| 1. flaps | CLEAN |
| 2. landing light | ON (recommended) |
| 3. engine speed | AS REQUIRED |
| 4. maneuvering speed | $V_O = 88$ KIAS |
| 5. normal operating speed | $V_{NO} = 107$ KIAS |
| 6. never exceed speed | $V_{NE} = 135$ KIAS |
| 7. max. cont. engine speed | 5,500 rpm |
| 8. carburetor heat | OFF |
| 9. oil cooler flap | AS REQUIRED |
| 10. coolant or CHT temp | max. $135^{\circ}\text{C} = 275^{\circ}\text{F}$
max. $120^{\circ}\text{C} = 248^{\circ}\text{F}$ (w/ SB-012) |
| 11. oil temperature | $50...130^{\circ}\text{C} = 120...266^{\circ}\text{F}$ |

NOTE

It is recommended to keep the electric fuel pump switched on during the entire flight.

reasonable cruise configurations

with Tonini or Woodcomp fixed pitch propeller:

With an engine speed of 4,800 rpm, a true airspeed of 86 kts = 99 mph is achieved at 3,000ft. Fuel consumption is approx. 4.8 US gal.

with Sensenich ground adjustable propeller:

With an engine speed of 4,800 rpm, a true airspeed of 97 kts = 112 mph is achieved at 3,000ft. Fuel consumption is approx. 4.8 US gal.

with Neuform ground adjustable propeller:

With an engine speed of 4,800 rpm, a true airspeed of 97 kts = 112 mph is achieved at 3,000ft. Fuel consumption is approx. 4.8 US gal.

4 Normal Procedures

4.14 Flying in Rain

Checklist

- | | |
|------------------------|--------------------------------|
| 1. electric fuel pump | ON |
| 2. carburetor heat | ON |
| 3. engine speed | AS REQUIRED |
| 4. oil cooler flap | AS REQUIRED |
| 5. coolant or CHT temp | max. 135°C = 275°F |
| | max. 120°C = 248°F (w/ SB-012) |
| 6. oil temperature | 50...130°C = 120...266°F |

NOTE	• visibility to the front is very limited • windscreen may need defogging • flight performance is reduced • fuel consumption increases • stall speed increases • braking efficiency during landing is reduced
------	--

4 Normal Procedures

4.15 Flying Without Doors Procedure

- | | |
|-----------------------|--------------------|
| 1. door lock | OPEN |
| 2. gas spring on door | DETACH |
| 3. hinge pin | PULL |
| 4. door | TAKE OUT CAREFULLY |

NOTE	V _{NE} is reduced to 100 kIAS when flying without doors.
-------------	---

NOTE	Flying without doors leads to high wind velocities inside the cabin.
-------------	--

NOTE	For flight without doors, either one door or both doors must be taken out before flight.
-------------	--

NOTE	Unlocking and opening doors in flight is prohibited.
-------------	--

It is not required to prepare a separate weight and balance report and/or equipment list for operation without doors in case the detachment of the door(s) has been taken into consideration during flight preparation. A logbook entry is not required after the door(s) have been taken out or installed again.

Following data shall be used for the flight's individual weight and balance:

weight of door	3,350 g	=	7.7 lbs	(each)
station of door	150 mm	=	5.9 in	

4 Normal Procedures

4.16 Recovery from Stall Procedure

- | | |
|------------------------|------------------|
| 1. stick back pressure | RELEASE |
| 2. rudder | OPPOSITE to BANK |
| 3. aileron | NEUTRAL |
| 4. engine power | AS REQUIRED |

4.17 Descent Checklist

- | | |
|----------------------------|--|
| 1. flaps | CLEAN |
| 2. engine speed | AS REQUIRED |
| 3. electric fuel pump | ON |
| 4. maneuvering speed | $V_O = 88$ kIAS |
| 5. normal operating speed | $V_{NO} = 107$ kIAS |
| 6. never exceed speed | $V_{NE} = 135$ kIAS |
| 7. max. cont. engine speed | 5,500 rpm |
| 8. carburetor heat | RECOMMENDED |
| 9. oil cooler flap | AS REQUIRED |
| 10. coolant or CHT temp | max. $135^{\circ}\text{C} = 275^{\circ}\text{F}$
max. $120^{\circ}\text{C} = 248^{\circ}\text{F}$ (w/ SB-012) |
| 11. oil temperature | $50...130^{\circ}\text{C} = 120...266^{\circ}\text{F}$ |

4 Normal Procedures

4.18 Approach

Checklist

- | | |
|------------------------------|--------------------------------|
| 1. wind, weather, visibility | OK |
| 2. ATIS | CHECKED |
| 3. runway | CORRECT DIRECTION |
| 4. traffic pattern | ALTITUDE and ROUTING |
| 5. radios | ON and FREQUENCY SET |
| 6. transponder | AS REQUIRED |
| 7. carburetor heat | AS REQUIRED |
| 8. oil cooler flap | AS REQUIRED |
| 9. electric fuel pump | ON |
| 10. coolant or CHT temp | max. 135°C = 275°F |
| | max. 120°C = 248°F (w/ SB-012) |
| 11. oil temperature | 50...130°C = 120...266°F |
| 12. full flaps airspeed | $V_{FE} = 78$ kIAS |
| 13. approach airspeed | $V_{APP} = 60$ kIAS |
| 14. flaps | AS REQUIRED |
| 15. landing light | RECOMMENDED |

NOTE

In windy and gusty conditions increase approach airspeed as appropriate and take care for increased landing distances.

4 Normal Procedures

4.19 Landing Procedure

- | | |
|------------------------------------|---------------------|
| 1. full flaps airspeed | $V_{FE} = 78$ kIAS |
| 2. approach airspeed | $V_{APP} = 60$ kIAS |
| 3. flaps | DOWN |
| 4. target airspeed | AS RECOMMENDED |
| 5. engine power | AS REQUIRED |
| 6. elevator trim | AS REQUIRED |
| 7. touch down on main wheels first | |
| 8. brakes | IMMEDIATELY |

The target airspeed (airspeed on short final, app. 50ft above threshold) differs with actual aircraft weight. Please refer to the following table to select the correct approach airspeed.

aircraft weight	recommended target airspeed
1,000 lb	45 kIAS
1,100 lb	47 kIAS
1,200 lb	50 kIAS
1,320 lb	52 kIAS

NOTE	Landing distances given in chapter 5 have been determined with approach airspeeds given above. Landing with partial flaps or clean is possible and permitted, but landing distance will be significantly longer due to higher approach speeds required by higher stall speed.
-------------	---

NOTE	In high wind or gusty conditions less than full flap setting or clean flaps might be appropriate.
-------------	---

4 Normal Procedures

advise

In landing configuration, the airplane is very draggy and the propeller provides additional braking. Therefore, airspeed bleeds off quickly during flare.

It is easy to misjudge altitude during flare. When flare is initiated too high and airspeed bleeds away the airplane may stall or bounce.

In doubt or without an urge to achieve shortest landing distance as possible, keep a higher target airspeed.

rule of thumb

Keep it at sixty knots!
Or use all your guts.

4 Normal Procedures

4.20 Balked Landing Procedure

- | | |
|------------------------|--|
| 1. engine power | FULL POWER |
| 2. carburetor heat | OFF |
| 3. initial climb | 50 KIAS |
| 4. flaps retract | SAFE ALTITUDE |
| 5. steepest climb | 50 KIAS |
| 6. best climb | 60 KIAS |
| 7. oil cooler flap | AS REQUIRED |
| 8. coolant or CHT temp | max. 135°C = 275°F
max. 120°C = 248°F (w/ SB-012) |
| 9. oil temperature | 50...130°C =120...266°F |

4.21 After Landing Checklist

- | | |
|--------------------------|-------------|
| 1. landing light | RECOMMENDED |
| 2. flaps | UP |
| 3. electric fuel pump | OFF |
| 4. radio and transponder | AS REQUIRED |

4 Normal Procedures

4.22 Shutdown

Checklist

- | | |
|--------------------|---------|
| 1. avionics switch | OFF |
| 2. landing light | OFF |
| 3. position lights | OFF |
| 4. engine | OFF |
| 5. ACL | OFF |
| 6. cockpit lights | OFF |
| 7. master switch | OFF |
| 8. recovery system | SECURED |
| 9. parking brake | SET |

NOTE

It is permissible to switch avionics (GPS, radio, transponder, intercom) together with the avionics switch rather than separately.

NOTE

It is permissible to switch lights and fuel pump together with the master switch rather than separately.

NOTE

The engine may only be switched off on ground. Engine shut-down in flight is not an approved procedure. Without technical reason (see section 3 – emergency procedures), engine shut-down in flight shall be avoided.

5 Performance

Table of Contents

sect.	description	page
5.1	General	5-2
5.2	Summary of Flight Performances	5-2
5.3	ISA Atmosphere	5-3
5.4	Take-Off Distances	5-4
5.5	Landing Distances	5-7
5.6	Cruise Speed, RPM, Fuel Consumption, Range	5-10
5.7	Rate of Climb	5-11
5.8	Low Airspeed and Stall	5-12
5.9	Safe Glide Ratio	5-13

5 Performance

5.1 General

NOTE	All flight performances given in this section (speed, range, fuel flow, rate of climb, etc.) are reference values. Tolerances of engine and propeller as well as deviations from standard temperature and density of air may reveal divergent performances.
-------------	---

NOTE	The aircraft may be operated without fairings on wheels and/or landing gear legs. Performance is reduced by app. 5% on any of the following criteria: climb, cruise, range
-------------	--

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

5.2 Summary of Flight Performances


V _{SO} (stallspeed flaps 40°)	KLAS	42
V _S (stallspeed flaps 0°)	KLAS	44
V _X (any flap setting)	KLAS	50
V _Y (flaps clean)	KLAS	60
rate of climb at MSL flaps clean	ft/min	840
best glide	KLAS	60
take-off roll distance (flaps 0°)	m (ft)	234 (770)
take-off air distance	m (ft)	128 (421)
take-off distance	m (ft)	362 (1.191)
take-off roll distance (flaps 15°)	m (ft)	187 (615)
take-off air distance	m (ft)	134 (441)
take-off distance	m (ft)	321 (1.056)
landing air distance (flaps 40°)	m (ft)	140 (461)
landing roll distance	m (ft)	93 (306)
landing distance	m (ft)	233 (766)

5 Performance

5.3 ISA Atmosphere

All flight performance data are given for ISA standard atmosphere at sea level and standard temperature. To determine temperature in relation to ISA conditions please refer to the following chart:

ISA std. Temperature

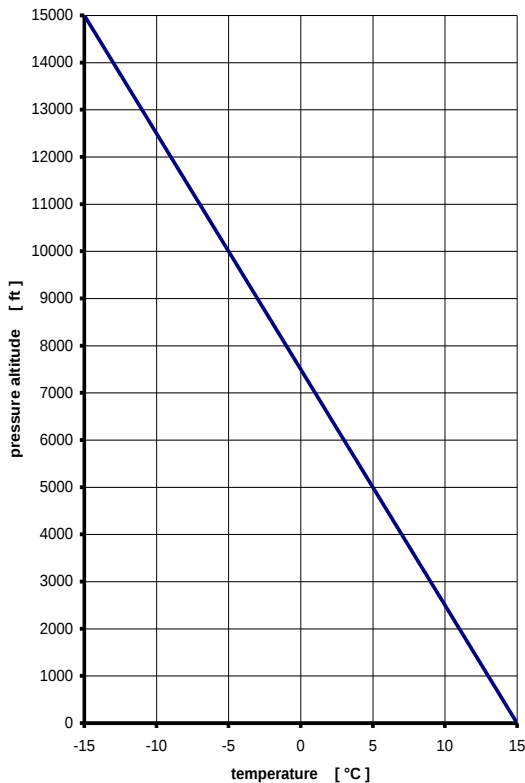

Flight performance can vary significantly due to tolerances, setting of propeller and engine, flight without doors, deviation of temperature and air density from standard ISA conditions, etc.

5 Performance

5.4 Take-Off Distances

For take-off with max. take-off weight on an even, dry, paved runway with ISA conditions on sea level, dry aircraft and wind calm the following take-off distances apply:

take-off flaps 0°
Sensenich or Neuform propeller

take-off roll distance	234 m 770 ft
take-off air distance over 50ft	128 m 421 ft
take-off distance over 50ft	362 m 1.191 ft

take-off flaps 15°
Sensenich or Neuform propeller

take-off roll distance	187 m 615 ft
take-off air distance over 50ft	134 m 441 ft
take-off distance over 50ft	321 m 1.056 ft

Tonini or Woodcomp propeller

take-off roll distance	230 m 757 ft
take-off air distance over 50ft	129 m 424 ft
take-off distance over 50ft	345 m 1.134 ft

5 Performance

NOTE	Take-off distances have been determined at ISA standard conditions at mean sea level and over a virtual 50ft obstacle.
-------------	--

NOTE	Standard procedures apply. Diverting from the standard procedures defined in section 4 will lead to different take-off distances.
-------------	---

Performance data apply under ISA conditions on an even, dry, hard runway surface. Various circumstances have an effect on take-off performance. According to CAA-circular AIC 127-2006, it is recommended to use following add-ons on roll- and air distances:

add-ons on take-off roll distance	
for dry grass	+ 20%
for wet grass	+ 30%
for soft surface	+ 60%
per 5 knots tailwind component	+ 20%
per 2% uphill slope	+ 10%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft

add-ons on take-off air distance	
for dirty or wet wings	+ 30%
per 5 knots tailwind component	+ 20%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft

NOTE	Reduction of take-off distances due to downhill slope or headwind must not be taken into account.
-------------	---

5 Performance

example calculation:

Take-off with a REMOS GX equipped with Neuform propeller in 2.000ft at 35°C from wet grass runway, 5kt tailwind, wet wing, take-off with flaps 0°. Standard wheels are mounted with wheel fairings.

- | | |
|------------------------------------|------|
| 1. temperature acc. to ISA diagram | 12°C |
| real temperature | 30°C |
| temperature above ISA: | 18°C |
| add-on acc. to table | 18% |
| 2. add-on for 2.000ft | 20% |
| 3. add-on for tailwind | 20% |
| 4. add-on for wet grass runway | 30% |
| 5. add-on for wet wing | 30% |

take-off roll distance = 234m (770ft) + 18% (temperature)
+ 20% (altitude)
+ 20% (tailwind)
+ 30% (wet grass runway)
= 517m (1.701ft)

take-off air distance = 128m (421ft) + 18% (temperature)
+ 20% (altitude)
+ 20% (tailwind)
+ 30% (wet wing)
= 283m (931ft)

take-off distance = 800m (2.632ft)

NOTE	Take-off distance has more than doubled compared to ideal conditions!
------	---

NOTE	Real-life take-off distance can be even higher.
------	---

5 Performance

5.5 Landing Distances

Landing is to be done with full flaps (40 deg). After touchdown, brake to the max for shortest landing distance, but do not block the wheels.

For landing with max. take-off weight on an even, dry, paved runway with ISA conditions on sea level, dry aircraft and wind calm the following landing distances apply:

landing	flaps 40°	
	all propellers	
	landing roll distance	93 m 306 ft
	landing air distance over 50ft	140 m 461 ft
	landing distance over 50ft	233 m 766 ft

NOTE	Landing distances have been determined at ISA standard conditions at mean sea level and over a virtual 50ft obstacle.
------	---

NOTE	Standard procedures apply. Diverting from the standard procedures defined in section 4 will lead to different landing distances.
------	--

5 Performance

Performance data apply under ISA conditions on an even, dry, hard runway surface. Various circumstances have an effect on take-off and landing performance. According to CAA-circular AIC 127-2006, it is recommended to use following add-ons on roll- and air distances:

add-ons on landing roll distance	
for dry grass	+ 15%
for wet grass	+ 35%
for soft or slippery surface	+ 60%
per 5 knots tailwind component	+ 20%
per 2% downhill slope	+ 10%
for high temperatures above standard	+ 5% per 10°C
for altitude above sea level (density altitude)	+ 5% per 1,000 ft

add-ons on landing air distance	
for dirty or wet wings	+ 30%
per 5 knots tailwind component	+ 50%
for high temperatures above standard	+ 5% per 10°C
for altitude above sea level (density altitude)	+ 5% per 1,000 ft

NOTE	Reduction of landing distances due to uphill slope or headwind must not be taken into account.
-------------	--

5 Performance

example calculation:

Landing on soft surface with 2.000ft field elevation at 22°C, 5kt tailwind, wet wing and 2% downhill slope

1.	temperature acc. to ISA diagram	12°C
	real temperature	22°C
	temperature above ISA:	10°C
	add-on acc. to table	10%
2.	add-on for 2.000ft	10%
3.	add-on for downhill slope	10%
4.	add-on for soft runway	60%
5.	add-on for wet wing	30%

landing air distance = 140m (306ft) + 10% (temperature)
+ 10% (altitude)
+ 30% (wet wing)
= 220m (724ft)

landing roll distance = 93m (306ft) + 10% (temperature)
+ 10% (altitude)
+ 10% (slope)
+ 60% (soft runway)
= 198m (651ft)

landing distance = 418m (1.375ft)

NOTE	Landing distance has almost doubled compared to ideal conditions!
-------------	---

NOTE	Real-life landing distance can be even higher.
-------------	--

5 Performance

5.6 Cruise Speed, RPM, Fuel Consumption, Range

Rotax 912 UL-S, 100 hp engine, Woodcomp or Tonini propeller

engine speed [rpm]	fuel flow [gph] [ltr/h]		true airspeed [kTAS]	endurance [h]	range [nm]
5.400	6,7	25.4	98	3,1	304
5.200	6,0	22.7	95	3,5	333
5.000	5,4	22.4	91	3,9	355
4.800	4,9	18.5	87	4,3	374
4.600	4,4	16.7	83	4,8	398
4.400	3,9	14.8	79	5,4	427
4.200	3,5	13.2	75	6,0	450

Rotax 912 UL-S, 100 hp engine, Sensenich or Neuform propeller

engine speed [rpm]	fuel flow [gph] [ltr/h]		true airspeed [kTAS]	endurance [h]	range [nm]
5.400	6,7	25.4	113	3,1	350
5.200	6,0	22.7	107	3,5	375
5.000	5,4	22.4	102	3,9	398
4.800	4,9	18.5	97	4,3	417
4.600	4,4	16.7	91	4,8	437
4.400	3,9	14.8	85	5,4	459
4.200	3,5	13.2	80	6,0	480

NOTE	endurance and range based on 80ltr/21gal usable fuel, no reserve included
-------------	---

NOTE	Performance may be reduced due to tolerances, atmospheric conditions, age and cleanliness of aircraft, propeller and engine.
-------------	--

NOTE	Expect a performance loss of about 5% when flying without wheel fairings.
-------------	---

NOTE	Expect a performance loss of about 10% when flying without doors
-------------	--

5 Performance

5.7 Rate of Climb

Propeller		Woodcomp or Tonini	Sensenich	Neuform
best angle of climb airspeed V_x	klAS	50	50	50
best rate of climb airspeed V_Y	klAS	60	60	60
best rate of climb at MSL	ft/min	600	840	840

NOTE	Climb is flown with flaps retracted, see section 4
------	--

NOTE	Expect a performance loss of about 5% when flying without wheel fairings.
------	---

5 Performance

5.8 Low Airspeed and Stall

If the center of gravity is within the permissible range, the aircraft will be fully controllable until reaching the stall speed. As the aircraft approaches the stall speed, this will be indicated by slight aerodynamic buffeting. The stall speed is reached when the aircraft drops the nose or the elevator control comes to a stop. Once stall speed is reached, the pilot should lower the nose of the aircraft to re-establish a safe airspeed. Only release of the back pressure of the elevator is required, a significant “push” input is not required. When stalling the aircraft while in a turn the stall speed will increase.

stall speeds in level flight with engine idle

CG at most forward position

flap position	deg	0	15	40
stall speed	klAS	44	42	42

CG at most rearward position

flap position	deg	0	15	40
stall speed	klAS	43	39	39

Stalling the aircraft with engine at full power and/or in turns is possible and permissible. Expect airspeed indication outside the reliable range of the airspeed indicator. A significant stall break will occur. Without experience a mentionable altitude loss shall be considered for safe recovery.

5 Performance

5.9 Safe Glide Ratio

Airspeed for best glide is 60kIAS. Safe glide ratio of the airplane with wind milling propeller is approximately 1:11. This will result in following glide distances:

airspeed for best glide	[kIAS]	60
glide ratio	[--]	1 : 11
flaps	[deg]	0

altitude	[ft]	2,000	4,000	6,000	8,000	10,000
glide range	[nm]	3.6	7.2	10.9	14.5	18.1

NOTE	Glide performance is given for a clean airframe with flaps retracted, airspeed for best glide is 60kIAS.
	Deflected flaps, dirty airframe or other airspeeds will lead to lower glide ratio.

5 Performance

intentionally left blank

6 Weight-and-Balance-Information

Table of Contents

sect.	description	page
6.1	Center of Gravity Range and Determination	6-2
6.2	CG-Calculation	6-3
6.3	Calculation Example	6-4
6.4	Aircraft Specific Weights	6-5

6 Weight-and-Balance-Information

6.1 General

This section provides information how to determine the inflight center of gravity. Prior to each take-off, the pilot in command shall ensure that the center of gravity is within its permissible envelope.

For a correct determination of the inflight center of gravity the pilot needs following information:


- weight of pilot
- weight of passenger
- weight of baggage
- weight of fuel on board
- weight and center of gravity of the empty aircraft

The weight and balance report of the empty aircraft (empty CG) shall always be up to date and noted in section 6.7 of this manual. The procedure to determine the empty weight and CG is given in section 6.3 of this manual and in section 1 of the maintenance manual. The empty CG must be updated:

- after significant change of equipment
- after major repair

6 Weight-and-Balance-Information

6.2 Station Definitions

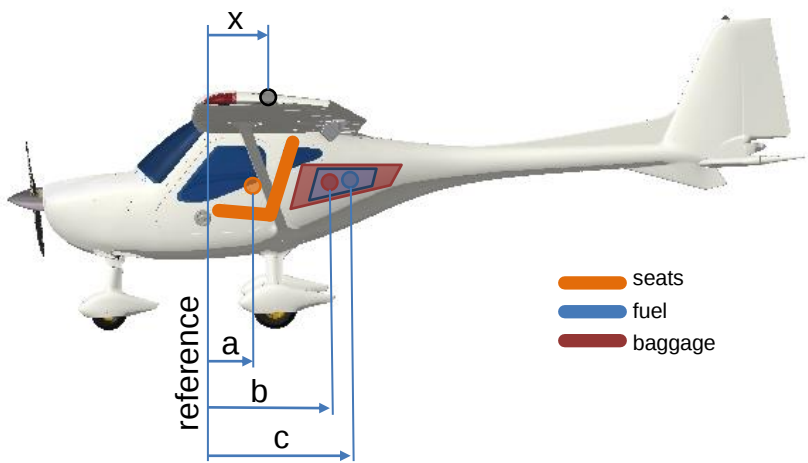


item		station	
a	seats	210 mm	8.3 in
b	baggage	950 mm	37.4 in
c	fuel	960 mm	37.8 in
x	empty/inflight CG	variable	

Procedure for determination of empty CG is given in the maintenance handbook. Actual empty CG can be obtained from the aircraft’s individual weight and balance report and/or section 6.8 of this manual.

6 Weight-and-Balance-Information

6.3 Aircraft Weighing Procedure

To determine the aircraft empty weight and CG, put the aircraft on 3 weighing scales, positioned on a level surface. Before weighing, a level wing main chord has to be established (use pads between main wheels and scale beneath). A check-mark reference point (R.P.) on the leading edge of the left wing, adjacent to the pitot tube, is provided to ease the levelling procedure. To level the wing main chord, use a flexible clear hose, filled with water, as a spirit level.

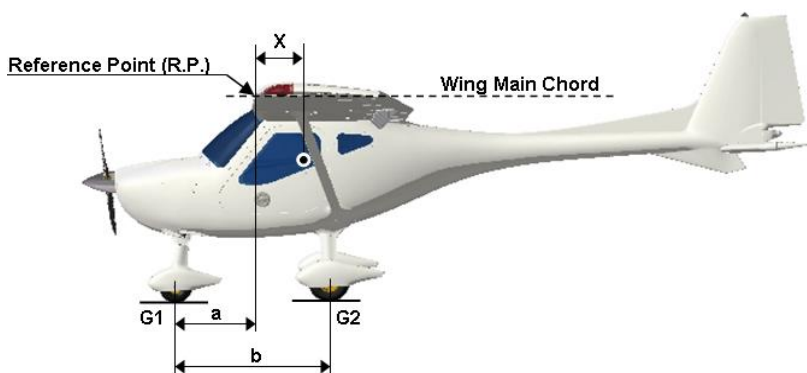

aircraft empty weight

$$G = G_1 + G_2$$

aircraft empty CG

$$x = \frac{G_2 * b}{G_1 + G_2} - a$$

6 Weight-and-Balance-Information

6.4 Change of Equipment

After change of equipment with known weight and CG of the added or removed equipment the new empty weight and CG of the aircraft can also be calculated instead of being determined by weighing as follows:

old empty weight	G_o
new empty weight	G_n
weight of item added/removed	G_i

old empty CG	X_o
new empty CG	X_n
station item added/removed	X_i

new empty weight	G_n	=	$G_o + G_i$
------------------	-------	---	-------------

new empty CG	X_n	=	$\frac{G_o X_o + G_i X_i}{G_o + G_i}$
--------------	-------	---	---------------------------------------

NOTE

Use negative sign of weight for items removed.


6 Weight-and-Balance-Information

6.5 Operating Weights and Loading

The CG range for any given airborne weight, measured from reference, must be within the permissible limits of 9.6in to 16.3in.

minimum airborne weight	not limited	
maximum take-off weight	600 kg	1.320 lb
front limit of CG	245 mm	9.6 in
aft limit of CG	415 mm	16.3 in

6.6 Weight and Balance Chart

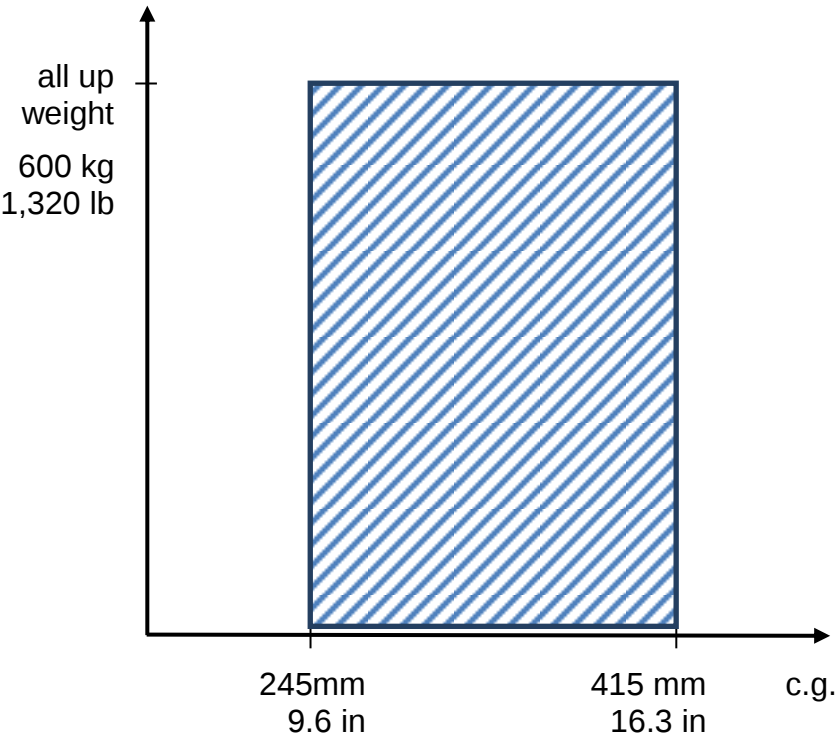

6 Weight-and-Balance-Information

6.7 Center of Gravity Range and Determination

The following procedure must be used to calculate the inflight CG.

1. moment calculation

moment = weight x station			
	weight	station	moment
empty weight	_____	_____	_____
occupants	_____	210 mm = 8.3 in	_____
baggage	_____	950 mm = 37.4 in	_____
fuel	_____	960 mm = 37.8 in	_____
weight total:	_____	moment total:	_____

2. center of gravity

center of gravity	=	$\frac{\text{moment total}}{\text{weight total}}$
-------------------	---	---

front limit of CG 245 mm
 9.6 in

aft limit of CG 415 mm
 16.3 in

NOTE	Calculate CG for the entire planned flight. Calculate CG with fuel at take-off and for landing.
-------------	---

NOTE	Occupants on board shift CG significantly. When filling up the fuel tank, the airplane may tilt on its tail skid. This is acceptable as long as the inflight CG is within limits.
-------------	---

WARNING	Never fly with an inflight CG outside the permitted envelope!
----------------	---

6 Weight-and-Balance-Information

6.8 Calculation Example

	weight	station	moment
empty weight	305 kg 670 lb	318 mm 12.5 in	96,990 kg mm 8,375 lb-in
occupants	70 kg 175 lb	215 mm 8.3 in	15,050 kg mm 1,453 lb-in
baggage	10 kg 22 lb	950 mm 37.4 in	9,500 kg mm 825 lb-in
fuel	55 kg 120 lb	960 mm 37.8 in	52,800 kg mm 4,536 lb-in
weight total:	440 kg 987 lb	moment total:	174,340 kg mm 15,189 lb-in

$$\text{center of gravity} = \frac{\text{moment total}}{\text{weight total}}$$

$$= \frac{174,340 \text{ kg mm} \quad 15,189 \text{ lb-in}}{440 \text{ kg} \quad 987 \text{ lb}}$$

$$= 396 \text{ mm} \quad 15.4 \text{ in}$$

OK! Let's fly!

NOTE	Density of fuel is 0,72 kg/ltr = 6 lb/gal
-------------	---

NOTE

The example above is given to show how to calculate the center of gravity. Do not use the weights and the empty CG in this example for your own flight preparation.

6 Weight-and-Balance-Information

6.9 Aircraft Specific Weights

Below are noted the aircraft specific data. Pilots must use this information to ensure a correct weight and balance calculation prior to every flight. This is essential for safe flight. For detailed information of the weight and balance data and the equipment installed on the aircraft refer to the individual aircraft weight and balance report, which includes the equipment list.

sign						
date of list of equipment						
date of weighing						
C.G.						
payload						
empty weight						

6 Weight-and-Balance-Information

intentionally left blank

7 Airplane and Systems Description

Table of Contents

sect.	description	page
7.1	General	7-3
7.2	Airframe	7-3
7.3	Control System	7-9
7.4	Cockpit Overview	7-13
7.5	Left Panel – Primary Instruments	7-14
7.6	Center Stack – Avionic Section	7-21
7.7	Right Panel – Backup and Engine Instruments	7-22
7.8	Auxiliary Panels	7-24
7.9	DYNON Glass Cockpit System	7-25
7.10	COM and NAV/COM	7-28
7.11	Intercom and Audio Panel	7-34
7.12	GPS Equipment	7-39
7.13	Transponder	7-43
7.14	Autopilot	7-44
7.15	Inflight Entertainment	7-46
7.16	Engine Operation	7-48
7.17	Electric System	7-49
7.18	Heating and Ventilation	7-55
7.19	Flaps	7-55
7.20	Cockpit Lighting	7-56

7 Airplane and Systems Description

sect.	description	page
7.21	External Lights	7-56
7.22	Seats	7-57
7.23	Baggage and Luggage	7-57
7.24	Recovery System	7-58
7.25	Engine	7-59
7.26	Propeller	7-60
7.27	Fuel System	7-60
7.28	Braking System	7-64
7.29	Special Equipment and Customizing	7-65

7 Airplane and Systems Description

7.1 General

This section of the POH shall give a brief introduction into the systems installed in the REMOS GX. For further information, maintenance and repair instructions see maintenance manual, latest revision.

7.2 Airframe

- type: Full composite carbon fiber aircraft with two seats.
- design: High wing design with struts, front mounted engine and propeller, traditional stabilizer concept, differential ailerons. Electrically operated flaps (0° to 40°), electric elevator trim, three-wheel landing gear with steerable nose wheel. Main gear with hydraulic disc brakes. The cabin is equipped with two seats side by side and can be entered and exited by doors on the left and right side of the fuselage.
- layout: Main components are built in half shells from composite fiber material, which are bonded together (carbon fiber, Kevlar and glass fiber).




7 Airplane and Systems Description

assembly of the wing

The wing consists of four main parts: wingbox, flap, aileron and wingtip. The wingtip is bolted to the wingbox, aileron and flap are hinged to allow control movements.


The wing is completed by the cover glass of the landing light and the main wingbolt which attaches the wing to the fuselage. All loads are supported by the wingbolt and the strut.

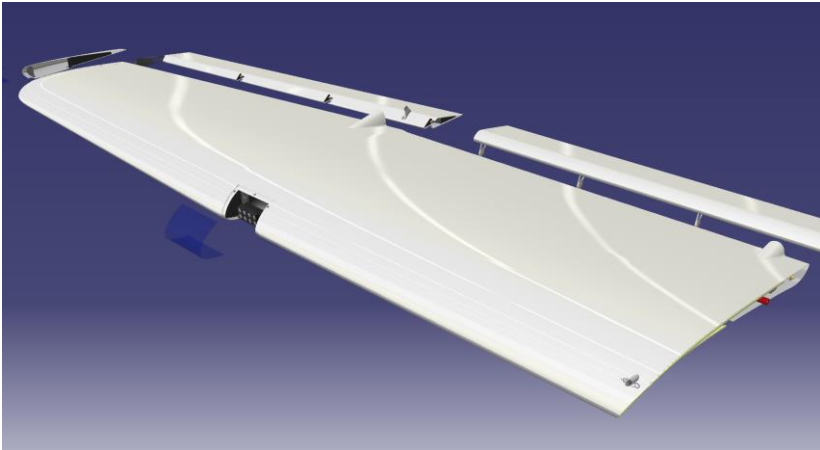



7 Airplane and Systems Description

structure of the wing

The wingbox is built up by the upper and lower wing skin consisting of CFRP sandwich (foam). Loads are transferred into the main and rear wing spar. The structure is completed by the landing light bay and ribs reinforcing hinge areas, closing the wing to the wingtip and the fuselage.

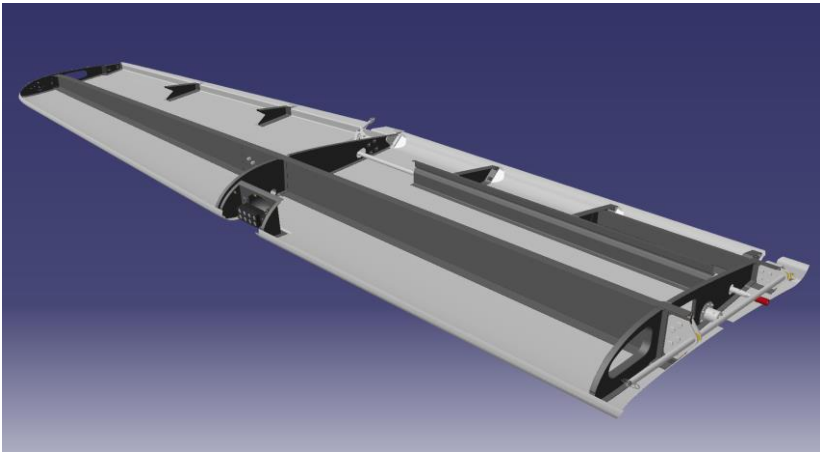


Ailerons and flaps are built up similarly, consisting of ribs and skins.

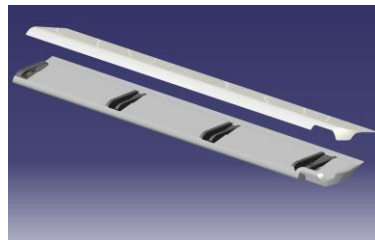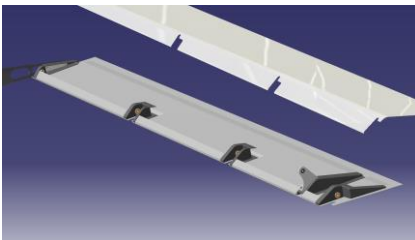

7 Airplane and Systems Description

structure of the fuselage

The skins of the fuselage are built of a monolithic layup of glass, carbon and Kevlar, reinforced by carbon tapes. Sandwich material (foam) is found in the fixed surface of the vertical tail only, which is an integral part of the fuselage. The fuselage skin is stiffened by stringers and frames.

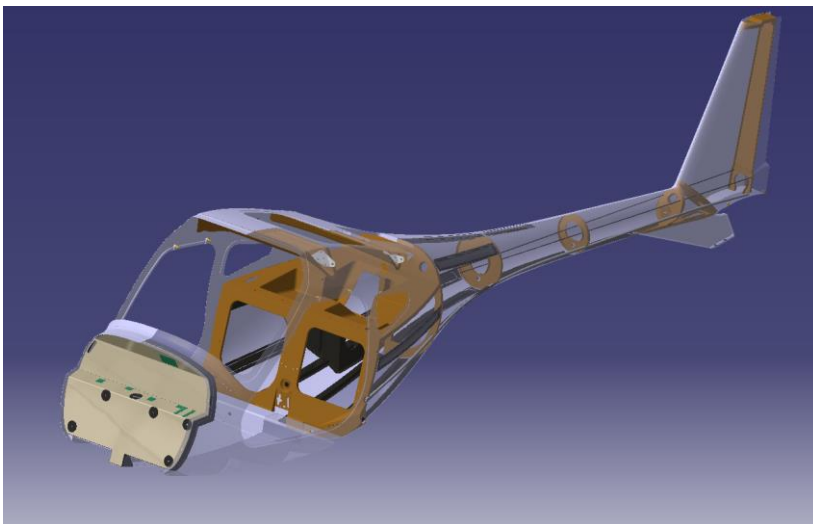


7 Airplane and Systems Description

attachment of struts

The wing strut is attached towards the wing and fuselage by a high tensile bolt, which is a genuine REMOS part. The wing strut can pivot about its axis some degree in order to allow the wing to be folded.

The strut consists of a stainless-steel tube with fork ends, covered with a fairing made from GFRP.

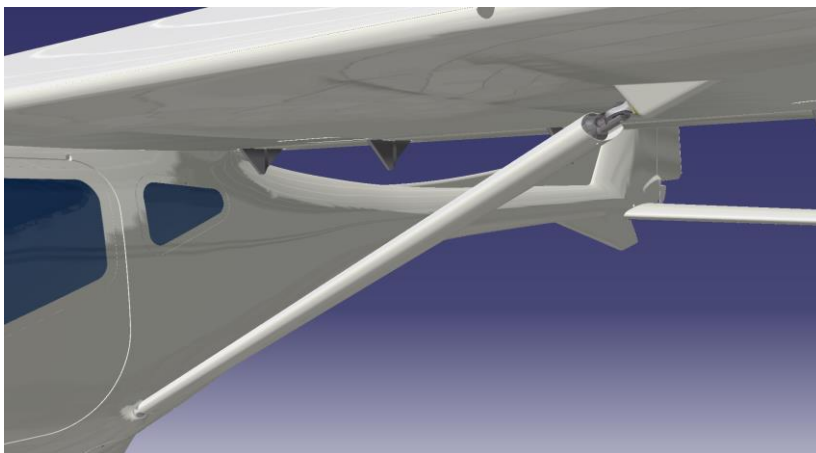


7 Airplane and Systems Description

installation of horizontal tail

The horizontal tail is made from GFRP. It is built up similar as the wing structure, consisting of ribs and spars.

The elevator includes a trim tab, which is operated electrically. The trim tab does not have a dedicated hinge, but uses the elastic flap technology; the upper skin is used as hinge.

Two horns are integral parts of the elevator containing counterweights in order to balance the moving surface.

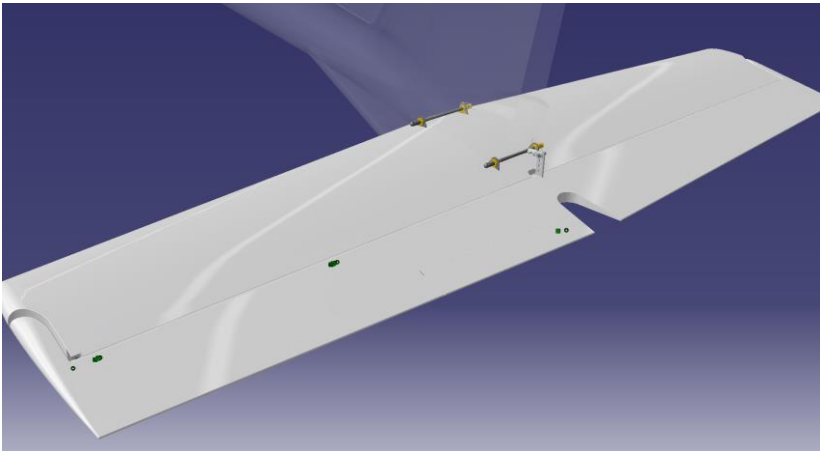


7 Airplane and Systems Description

7.3 Control System

The control system is made of aluminium pushrods and crank bells for the elevator and aileron controls. The rudder is operated by steel cables. The trim system is an electrically driven trim tab on the elevator; aileron and rudder have ground adjustable tabs.

rudder control system

Rudder control is maintained through use of conventional rudder pedals which also control nose wheel steering. The system is comprised of rudder pedals, a steering rod (sliding translator) towards the nose wheel dip tube, cables and pulleys, all of which link the pedals to the rudder and nose wheel steering.

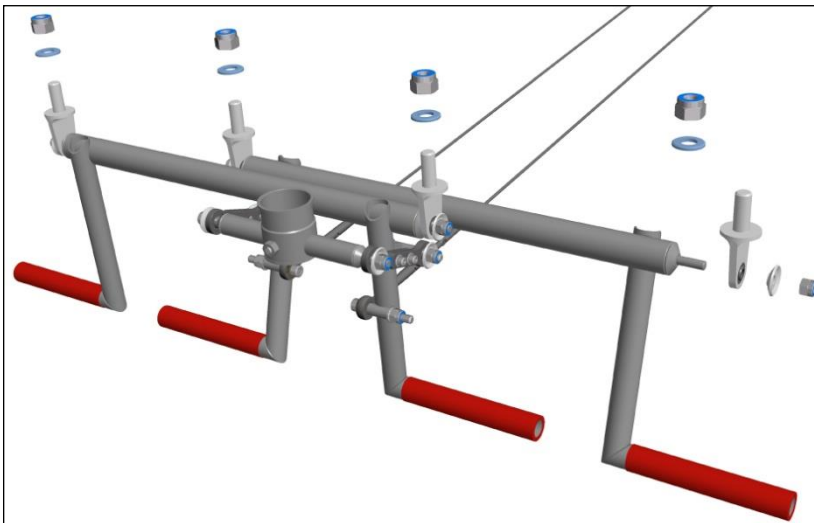


7 Airplane and Systems Description

elevator control system

The control sticks are installed to a pivoting connection element (stick bridge). Thereby a push/pull input stick is transferred from the control stick through a bell crank and a push-pull tube towards the elevator. An electrical operated elevator trim tab is installed on the elevator.

The elevator control system is connected to the elevator by a quick connector to allow the tailplane to be detached from the aircraft. Checking this quick connector is part of the preflight check!

Insecurely connected, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!!

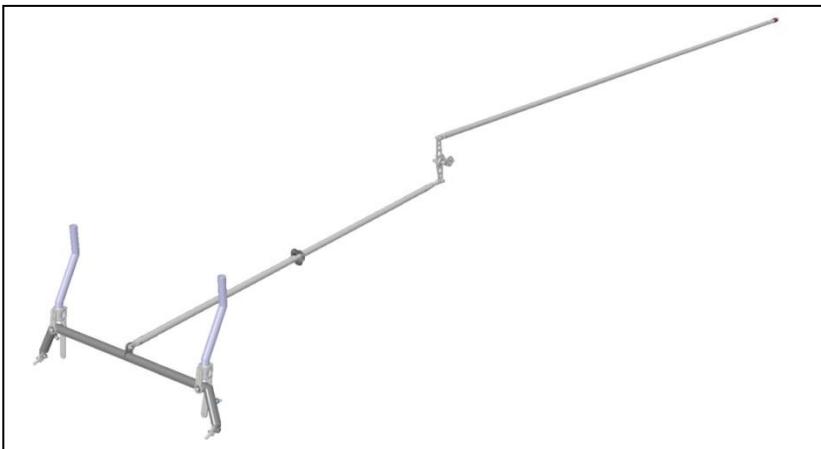

7 Airplane and Systems Description

aileron control system

Both control sticks are linked together by a control rod system to ensure synchronous movement. The linkage is located beneath two fiberglass-panels on the floor of the cabin right in front of the seats. A translator connects the control stick linkage to the aileron linkage, which uses several bell cranks to establish the connection to the control surfaces.

The aileron control system is split between the elements installed in the fuselage and in the wing. Both parts are connected by a connector. This connector is a quick connector to allow the wings to be folded. Checking these quick connectors is part of the preflight check!


Insecurely connected, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!!



7 Airplane and Systems Description

flying with only one control stick installed

Under certain conditions it might be favorable to have only one control stick installed. It is permissible to take out the control stick on the passenger side. See section 2 for the definition of the seat of the pilot in command.

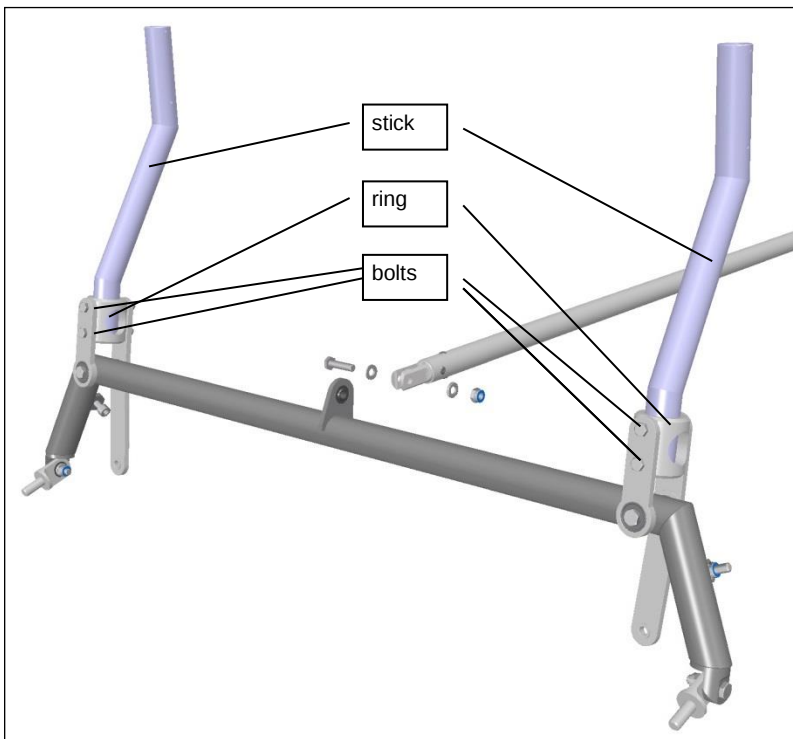

Take out the bolts on the side where the stick shall be uninstalled. Take out the stick. Newer aircraft have the trim and PTT buttons wired with a connector so the stick can be left outside the aircraft. In elder aircraft the stick must be stowed safely. Re-install the mounting ring by means of the bolts.

7 Airplane and Systems Description

7.4 Cockpit Overview

Cockpit example



7 Airplane and Systems Description

7.5 Left Panel – Primary Instruments

Traveller / Explorer until SN297

Instrumentation in the base-equipped Traveller or Explorer consists of an airspeed indicator, vertical speed indicator, altimeter, slip indicator and Rotax FLYdat. Optional equipment consists of a directional gyro, an artificial horizon, a turn/bank indicator (instead of the slip indicator) and a CDI.



Traveller / Explorer until SN297, shown with base equipment

7 Airplane and Systems Description

The Rotax **FLYdat** is a multifunction instrument, specially developed for the Rotax engine for indication and acquisition of engine operating data. The operating data is continuously compared with the specific engine operating limits. If any value exceeds its operating limit, the **FLYdat** will display a warning.

The **FLYdat** features the following readings: engine speed, CHT, oil pressure and temperature, exhaust gas temperature and hours of operation.

For maintenance and analysis of engine issues, the **FLYdat** stores all data. To read out and reset the warning messages, the **FLYdat** can be connected to a PC.



If any value approaches its limit, it starts blinking. If the limit is exceeded the red STATUS light will light up red.

7 Airplane and Systems Description

Traveller / Explorer from SN298 on

The aircraft is equipped with an airspeed indicator, vertical speed indicator, altimeter, slip indicator and analogue engine tachometer, all located in the left panel. Optional equipment consists of a directional gyro, an artificial horizon, a turn/bank indicator (instead of the slip indicator) and a CDI.



Traveller / Explorer from SN298 on, shown with base equipment

7 Airplane and Systems Description

Voyager / Aviator-I until SN297

Instead of conventional gauges, primary flight instrumentation is displayed on a Dynon EFIS D-100. Engine instrumentation is displayed by a Rotax **FLYdat**. Furthermore backup instrumentation, consisting of the airspeed indicator and altimeter, is installed in the left panel as well. The expansion module HS34 is available as an option.



Voyager / Aviator-I until SN297, shown with optional HS34 module

7 Airplane and Systems Description

Voyager / Aviator-I from SN298 on

Primary flight and engine instrumentation is displayed on a Dynon FlightDEK D-180. This is a highly-integrated avionics system, unifying an “Electronic Flight Information System” and an “Engine Monitoring System. This means that primary and secondary flight and navigation instrumentation is displayed on a color display. The following functions are integrated into the FlightDEK D-180:

Airspeed indicator, altimeter, vertical speed indicator, turn and slip indicator, magnetic compass, artificial horizon, CDI, HSI, Glideslope for ILS approaches (in combination with SL-30 NAV/COM only), voltmeter, ammeter, g-meter, true airspeed, OAT, engine tachometer, manifold pressure, oil pressure, oil temperature, CHT, EGT (2x), fuel consumption, fuel pressure, fuel on board, timer, checklists, etc.

An optional HS34 module extends the functionality of the D-180 with an HSI. By using this instrument, precise aerial navigation is possible. In case of an autopilot installed, the AP-74 autopilot operation panel is part of the package.



Voyager / Aviator-I, shown with optional HS34

7 Airplane and Systems Description

Cruiser and Aviator-II (all serial numbers)

This top of the line avionics suite is equipped with a full set of glass screens. All primary and secondary flight instrumentation is displayed on an “Electronic Flight Information System” Dynon EFIS D-100. All engine instruments are displayed on an “Engine Monitoring System” Dynon EMS D-120. Additionally, an HS34 is installed. In case of an autopilot installed, the AP-74 autopilot operation panel is part of the package.



Cruiser / Aviator-II, all SN

7 Airplane and Systems Description

7.6 Center Stack – Avionic Section

The center stack provides space for installation of ATC-radio, navigation-radio, GPS, intercom or audio panel and transponder. Multiple combinations of equipment are available; hence the actual center stack and its appearance can differ from the figures below.



center stack, excerpt of possible versions

7 Airplane and Systems Description

7.7 Right Panel – Backup and Engine Instruments

Aircraft until SN297

Depending on the primary instrumentation, various instruments are installed in the right panel. The figures below show the available variants. Traveller/Explorer and Voyager/Aviator-I are equipped with OAT, fuel gauge and fuel pressure, volt meter, compass and manifold pressure (if equipped with variable pitch propeller). For the Cruiser or Aviator-II, the backup altimeter and airspeed indicator are found in the right panel, as well as a compass and a fuel gauge.



Traveller/Explorer and Voyager/Aviator-I with option manifold pressure




Cruiser and Aviator-II

7 Airplane and Systems Description

Aircraft from SN298 on

Depending on the primary instrumentation, various instruments are installed in the right panel. The figures below show the available variants. Traveller and Explorer have an Engine Monitoring System Dynon EMS D-10 installed. Voyager and Aviator-I do not have any instruments on the right side. In the case of the Cruiser or Aviator-II, a backup altimeter and airspeed indicator are found in the right panel. The magnetic compass is always installed on top of the panel for the lowest deviation.

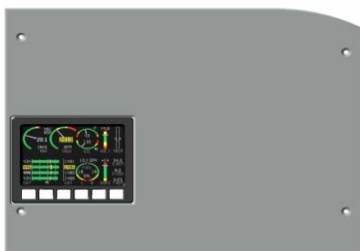

Traveller or Explorer



Voyager or Aviator I



Cruiser or Aviator II

7 Airplane and Systems Description

7.8 Auxiliary Panels

Two extension panels are located to the left and to right of the cockpit frame which are used as follows:

left panel

The oil temperature control is installed in the upper position. Push to increase temperature, pull to decrease temperature.

The dual throttle control is located in the lower position. The left throttle lever does not feature a friction lock.



right panel (not shown)

The 12V receptacle for external use is installed in the upper position. The inner contact is the plus pole. The current is limited to 1A.

Aircraft up to SN377 are equipped with two audio-in synch jacks in this panel or in the center stack beneath the intercom. From SN378 on a standard 3.5mm jack is installed.

update jacks

Aircraft up to SN297 are equipped with an update SUB-D 9-pin connector behind the panel. Aircraft between SN298 and SN377 are equipped with a SUB-D 9-pin connector located in the right option panel to be used as a PC interface for connecting installed devices to a personal computer. From SN378 all aircraft are equipped with update jacks behind the panel.

7 Airplane and Systems Description

7.9 DYNON Glass Cockpit System

This POH only provides basic introduction and instructions. For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of DYNON Avionics www.dynonavionics.com offers the possibility to download the manuals.

DYNON EFIS D100, DYNON EMS D120 and DYNON FlightDEK D180



All normal operation of the DYNON glass cockpit system happens via the front panel. The system is operated with the grey softkeys on the bottom below the screen.

Buttons

There are six buttons on the front panel of the DYNON glass cockpit system. Throughout this guide, these buttons are referred to as one through six, with button one being the leftmost and button six being the rightmost. Buttons are used to turn the instrument on and off, cycle between screens, scroll through menus, and adjust instrument parameters.

7 **Airplane and Systems Description**

Screen The display shows EFIS information, menus, and data obtained from other connected products. The display is the most obvious and commonly used output of the device. It is capable of displaying EFIS, HSI, and/or engine data simultaneously.

The terms in the following bulleted list are used in this section and are defined as follows:

Screen Config. Screens consist of one or two pages from the D100, D120 or D180.

Page A page is a section of the screen that contains a collection of related data. Pages may occupy the total area of the screen (i.e., 100%) or share the screen with other pages (e.g., 2/3, 1/3 split). Pages that occupy 1/3 of the screen area are sometimes abbreviated versions of their full size (100% or 2/3) counterparts.

Screen Rotation The rotation is the list of screen configurations which can be cycled to via the hotkeys. Your rotation is usually smaller than the total list of available screen configurations. Predefined screens are EFIS, EMS, HSI, AUX, FUEL.

Screen Cycling Navigate to the SCREEN LIST menu by holding button six for at least two seconds when no menu is present (see the figure to the right). Note that if you only press button six momentarily, the display cycles to the next screen in your screen rotation. Use the DOWN▼/UP▲ buttons to move the caret (>). The caret denotes the selected screen. Press GOTO► to remove the SCREEN LIST and display the selected screen. If you wish to stay on the same screen, you may either select your currently displayed screen with the caret and press GOTO►, or press CANCEL.

7 Airplane and Systems Description

BARO setting Hit any softkey to open the menu and then select softkey 2 labeled BARO. Then hit + or – to adjust QNH.

primary instrumentation

The primary flight instrumentation and engine indication are realized by the DYNON glass cockpit system. Any primary and secondary flight instruments as well as navigation are shown on the screen. In case of the D120 and D180 installed, this applies as well for engine indication. Nevertheless, this does not include the fuel tank indication. Although such an instrument is integrated in the system, the primary fuel indication is the fuel sight tube behind the right seat.

standby instrumentation

A dedicated airspeed indicator and altimeter may be installed in the left panel, but the primary instrumentation is the DYNON system.

NOTE	Although the REMOS GX equipped with the DYNON avionic system, which is a very capable and reliable avionic suite, please keep in mind that flights in IMC are not permitted as per regulations. IFR flights in VMC may be permitted in certain states, depending on national regulations.
-------------	---

7 Airplane and Systems Description

DYNON HS-34

The DYNON HS-34 expansion module allows easier operation of the D100 or D180 compared with the buttons alone. It does not add functionality, but makes operation more practical. The HS-34 module is available in a horizontal and in a vertical version.



NAVSRC	Selects source for HSI navigation. Pressing selects or switches to the next available source (rotary select): none, NAV (navigation radio) or GPS.
BRGSRC	Selects source for the bearing pointer in the HSI. Selected source is displayed in the HSI.
VALUE	Allows setting QNH. After pushing the knob, bugs for altitude or heading may be set as well.
HEADING	Sets the heading bug of the HSI. When NAVSRC is set to GPS, heading bug is replaced by a track bug colored magenta.
COURSE	Selects radial, deactivated when GPS is selected as navigation source.

7 Airplane and Systems Description

7.10 COM and NAV/COM

PS-Engineering PAR200A

The PS-Engineering PAR200A is a VHF radio with 8.33kHz spacing with integrated intercom. It can manage another radio or NAV/COM (no MKR functionality).



- | | |
|-------------------|---|
| on/off, volume | The PAR200A is switched on and off by pushing the VOL knob. This knob also adjusts volume. |
| frequency | Frequency is selected with the outer ring and inner selector of the TUNE knob. Frequency selected is displayed in the right of the display. Pressing the TUNE flips standby and active frequency. |
| monitoring | Pressing N1 for a least 5 seconds enables monitoring of the STB frequency at the same time as the active frequency. Transmission is on active freq only; audio quality is reduced. |
| selecting NAV/COM | The PAR200A can manage a second radio or NAV/COM. Selecting a radio from the RCV line allows monitoring to that radio. The intercom will only transmit on radio selected with XMT. |
| VOX squelch | VOX squelch need not be adjusted as the PAR200A is equipped with IntelliVox technology. |

This POH only provides basic introduction and instructions. For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of PS-Engineering www.ps-engineering.com offers the possibility to download the manuals.

7 Airplane and Systems Description

TRIG TY96/TY96A and TY97/TY97A

The TRIG TY-series are VHF COM transceivers with 8.33kHz or 25kHz (A-suffix) frequency channel spacing. It incorporates a number of functions that save time and effort. The database technology allows to store and recall commonly used or recently used frequencies by an assigned name. All information is displayed prominently on the device's large sunlight-readable LCD display.



on/off, volume	The radio is switched on and off by rotating the left knob. This knob also adjusts volume.
frequency	Frequency is set with the right knob. The large knob adjusts the MHz portion of the standby frequency, and the smaller knob adjusts the kHz portion of the standby frequency. Pushing on it selects 8.33 or 25kHz channel spacing (not on A-models).
flip-flop button	The flip-flop button swaps the frequency in the standby position into the active position, and moves the active frequency to the standby position.
monitoring	Pressing MON enables monitoring of the STB frequency at the same time as the ACT frequency. The radio will only transmit on the ACT frequency. The audio quality is reduced.

This POH only provides basic introduction and instructions. For details refer to the manufacturer's instruction manual that comes with your airplane. The website of TRIG www.trig-avioncs.com offers the possibility to download the manuals.

7 Airplane and Systems Description

GARMIN GTR225A

The GARMIN GTR225 or GTR225A is a VHF COM transceiver with 8.33kHz frequency channel spacing. It incorporates a number of functions that save time and effort. Provide the GTR225 with an airport identifier and it will automatically find its frequency (and vice versa) thanks to a built-in, updateable database. The database technology also allows to store and recall commonly used or recently used frequencies by an assigned name. All information is displayed prominently on the device's large sunlight-readable LCD display.



This POH only provides basic introduction and instructions. For details refer to the manufacturer's instruction manual that comes with your airplane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

on/off, volume	The radio is switched on and off by rotating the VOL knob. This knob also adjusts volume.
frequency	Frequency is selected with the outer ring and inner selector of the TUNE knob. Frequency selected is displayed in the right of the display. Pressing the flip-flop button ↔ flips standby STB and ACT frequency.
monitoring	Pressing MON enables monitoring of the STB frequency at the same time as the ACT frequency. The radio will only transmit on the ACT frequency. The audio quality is reduced.

7 Airplane and Systems Description

GARMIN GNC255/A

The GARMIN GNC255 or GNC255A is a VHF COM transceiver with 8.33kHz frequency channel spacing and a 200-channel VOR/LOC/GS NAV receiver in one combined housing. The GNC255A also incorporates workload-reducing functions such as automatic decoding of the Morse code station identifier for VOR/LOC/ILS, most-used frequency storage in unit memory, built-in course deviation indicator and more.



The GNC255/A incorporates a number of functions that save time and effort. Provide the GNC255/A with an airport or navaid identifier and it will automatically find all available frequencies (and vice versa) thanks to a built-in, updateable database. The database technology also allows to quickly pull up most frequently or most recently used frequencies. The device even automatically decodes a station's Morse code to provide a positive identification – no aural decoding required.

It offers standby frequency monitoring of NAV and COM providing the capability of two NAV/COMS in one. Standby COM frequency monitoring lets the pilot listen to transmissions like ATIS or the emergency channel without leaving the active frequency.

With the primary VOR/LOC frequency selected as NAV source on the DYNON SkyView, the standby frequency can be tuned to a second VOR to display the current radial on which your aircraft is flying and be displayed as BEARING source on the SkyView. This allows to cross check position fixes with just one receiver, the standby-VOR tuned in serves as an NDB in this case.

7 Airplane and Systems Description

on/off, volume	The radio is switched on and off by rotating the VOL knob. This knob also adjusts volume.
COM/NAV display	Pressing the C/N button changes display of NAV and COM frequencies.
COM frequency	Hit C/N first to select COM frequency band. Frequency is selected with the outer ring and inner selector of the TUNE knob. Frequency selected is displayed in the right of the display. Pressing the flip-flop button ↔ flips standby STB and ACT frequency.
NAV frequency	Hit C/N first to select NAV frequency band. Frequency is selected with the outer ring and inner selector of the TUNE knob. Frequency selected is displayed in the right of the display. Pressing the flip-flop button ↔ flips standby STB and ACT frequency. When GNC225A is selected as navigation source on the SkyView, the NAV STB frequency can be tuned into a second VOR and displayed as bearing on the HSI. In this case the VOR serves as NDB.
listen to NAV ID	By pressing NAV knob the ID of the VOR station or ATIS on NAV frequency can be monitored. Volume can be adjusted by turning the NAV knob.
monitoring	Pressing MON enables monitoring of the STB frequency at the same time as the ACT frequency. The radio will only transmit on the ACT frequency. The audio quality is reduced.

For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

7 Airplane and Systems Description

GARMIN SL40

The GARMIN SL40 is a 760-channel VHF COM transceiver with 25kHz frequency channel spacing. It incorporates active and standby flip-flop frequency tuning. Its frequency monitor function allows to check ATIS or emergency frequencies without leaving the assigned ATC channel



The SL40 is the predecessor of the GARMIN GTR225/A. The functionality is similar. Main differences are that the SL40 has a 25kHz channel spacing only and does not automatically tunes in a station when provided with the station identifier.

GARMIN SL30

The GARMIN SL30 is a 760-channel VHF COM transceiver with 25kHz frequency channel spacing and a 200-channel VOR/LOC/GS NAV receiver in one combined housing. The SL30 also incorporates workload-reducing functions such as automatic decoding of the Morse code station identifier for VOR/LOC/ILS, most-used frequency storage in unit memory, built-in course deviation indicator and more.



The SL30 is the predecessor of the GARMIN GNC255/A. The functionality is similar. Main differences are that the SL30 has a 25kHz channel spacing only and does not automatically tunes in a station when provided with the station identifier.

7 Airplane and Systems Description

7.11 Intercom and Audio Panel

PS-Engineering PM1000/II

This is a basic intercom, but already incorporates all necessary intercom functionality incl. audio-in capability. The intercom may be used with mono or stereo headsets.



on/off	The intercom is switched on and off by pushing the left volume knob.
volume	Volume is adjusted with the inner knobs on left and right side individually.
VOX squelch	VOX squelch is adjusted by rotating the ring around the inner knob. It is adjusted for left and right seat individually.

This POH only provides basic introduction and instructions. For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of PS-Engineering www.ps-engineering.com offers the possibility to download the manuals.

7 Airplane and Systems Description

PS-Engineering PMA8000BT/i

This is an audio panel with marker beacon receiver. It incorporates audio-in capability with several muting modes. The audio panel may be used with mono or stereo headsets.



A common volume knob is provided for left and right seat. Setting squelch is not required as the audio panels incorporate INTELLI-VOX that adjusts squelch automatically.

on/off, volume The audio panel is switched on and off by pushing the VOL knob. This knob also adjusts volume.

selecting NAV/COM The PMA8000BT/i can manage two radios or NAV/COM. Selecting a radio from the RCV line allows monitoring to that radio. The audio panel will only transmit on radio selected with XMT.

VOX squelch VOX squelch need not be adjusted as the PMA8000BT/i is equipped with IntelliVox technology.

intercom VOX Intercom VOX volume is adjusted by turning the outer ring of the VOL knob.

This POH only provides basic introduction and instructions. For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of PS-Engineering www.ps-engineering.com offers the possibility to download the manuals.

7 Airplane and Systems Description

GARMIN GMA240/245

The Garmin GMA240 and GMA245 are intercom with audio-in capability. Marker beacons cannot be received. Left and right volume and squelch can be adjusted separately.



The GARMIN GMA240 is a Stereo intercom designed to be used in combination with stereo headsets. The wiring of the aircraft is designed to use stereo headsets, too.

If mono headsets are plugged in, the signal for the right channel will short out with ground. The jacks in the REMOS GX do not provide an automated shutdown of the right channel if mono headsets are plugged in.

Shorting out the right channel with ground may lead to damage of the intercom, as described in the GARMIN GMA240 manual. Furthermore, the radio may be damaged. Therefore, only use stereo headsets. If you own mono headsets only and want to continue to use them, use adaptors from the mono jack to the stereo connector. Be sure that those connectors do not short out signal and ground. Adaptors such as this may be obtained at local commercial electronics distributors. The intercom may be damaged, too, if the headset is plugged in or pulled or out while the intercom is switched

7 Airplane and Systems Description

on. Always shut down the intercom when connecting or disconnecting headsets.

From SN378 on all aircraft are equipped with stereo/mono switches. In this case mono headsets are approved without any adaptors. Make sure the stereo/mono switch is in the correct position, otherwise you still may damage the intercom. Also make sure that the intercom is switched off when you plug in or pull out the headsets.

NOTE	The warranty does not apply if the intercom or the radio fail when using mono headsets without the appropriate stereo/mono adaptor, during operation with the incorrect position of the stereo/mono switch or when plugging in or disconnecting headsets while the intercom is switched on.
-------------	---

on/off, volume The intercom is switched on and off by hitting the VOL knob. This knob also adjusts volume.

selecting NAV/COM The GMA245/245 can manage two radios or NAV/COM. Selecting a radio from the upper line allows monitoring to that radio. The audio panel will only transmit on radio selected with MIC.

VOX squelch VOX squelch is adjusted by rotating the outer ring of one of the knobs. On the GMA245 VOX squelch need not be adjusted as it is equipped with auto-squelch technology.

intercom VOX Intercom VOX volume is adjusted by turning one of the inner knobs.

For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

7 Airplane and Systems Description

GARMIN GMA340

This is an audio panel with marker beacon receiver. It incorporates audio-in capability with several muting modes. The audio panel may be used with mono or stereo headsets. Volume for left and right seat can be adjusted separately. Music can be fed into the audio system via the music-in jack in the center console.



- on/off, volume The audio panel is switched on and off by pushing the VOL knob. This knob also adjusts volume for the left seat. Volume for the right seat is adjusted by rotating the inner ring of the right VOL knob.
- selecting NAV/COM The GMA340 can manage two radios or NAV/COM. Selecting a radio from the upper line allows monitoring to that radio. The audio panel will only transmit on radio selected with MIC.
- VOX squelch VOX squelch is adjusted by rotating the outer ring of one of the knobs.

For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

7 Airplane and Systems Description

7.12 GPS Equipment

GARMIN GPSMAP series

The GPS by Garmin are navigation aids with color screen, operated by discrete buttons. The GPS is switched on automatically once the ignition key is set to AVIONIC.



GPSMAP495/496



GPSMAP695/696

Basic operation is done by following icons:

NRST	shows nearest airfields
ENTER	acknoleges selected menu item
QUIT	aborts actual action
MENU	opens menu for programming
OUT / IN	allows zooming

For detailed data refer to the manufacturer's instruction manual that comes with your plane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

7 Airplane and Systems Description

GARMIN aera660 and aera series


The GPS by Garmin are prime class navigation aids with brilliant color screen and touch operation. The GPS is switched on automatically once the ignition key is set to AVIONIC.



aera 5xx series



aera660

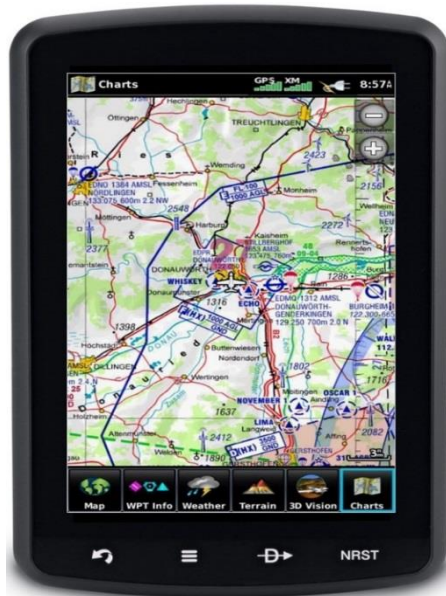


aera 796

This POH only provides basic introduction and instructions. For details refer to the manufacturer's instruction manual that comes with your airplane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.


7 Airplane and Systems Description

Following gestures operate the GPS:

select




zoom




zoom in

scroll



zoom out

pan



Basic operation is done by following icons:

MAP	shows sectional map
NEAREST	shows nearest airfields
DIRECT TO	enabled direct navigation to airfield selected
FPL List	shows active flightplan and allows programming
ZOOM	allows zooming

7 Airplane and Systems Description

FlymapL

This GPS is the top-end equipment offered in the REMOS GX. It relies solely on touchscreen operation. Tap and hold on a map item and a context menu opens.



Operating the FlymapL is self-explanatory, when keeping in mind that tapping and holding on a map item opens a context menu. This includes generation of waypoints and activation of approach charts.

Tap on the screen and the tapped position is the new center of the map. Tapping in the center of the screen centers the map on the current position of the aircraft.

This POH only provides basic introduction and instructions. For details refer to the manufacturer's instruction manual that comes with your airplane or visit www.flymap.net.

7 Airplane and Systems Description

7.13 Transponder

GARMIN GTX327/328/330

The GARMIN GTX327/328/330 series are modern Mode S solid-state transponders (GTX327 Mode C only). Operation is by dedicated soft-touch keys. A squawk is entered directly by hitting the number buttons 0 thru 7.



ON	activates Mode A
ALT	activates Mode A/C/S
STBY	sets the XPDR into standby mode
OFF	switches off
0...7	enters squawk
IDENT	squawks ident
VFR	squawks VFR

This POH only provides basic introduction and instructions. For details refer to the manufacturer's instruction manual that comes with your airplane. The website of GARMIN www.garmin.com offers the possibility to download the manuals.

7 Airplane and Systems Description

7.14 Autopilot

The autopilot of the DYNON system allows holding and changing altitude, and flying along heading, track, radial or GPS waypoint flightplan.

The autopilot requires to simultaneously work with both the modules HS34 (see section 7.9) and AP74. Just like the HS34 module the AP74 is available in a horizontal and a vertical version.



The procedure to operate the autopilot is as follows:

1. Switch on the autopilot system on the switchboard.
2. Verify QNH, adjust as required.
3. Select a navigation source on the HS34 (none, NAV or GPS).
4. Select mode(s) on AP74.
5. Engage autopilot by pressing the AP/HOLD180 button on the AP74 module or by holding the AP/DISC button on the left control stick for at least 5 seconds before releasing.
6. Select altitude by setting ALT BUG.
7. Select heading or track by setting bug or select radial.
8. Hit the AP/DISC button on the control stick or press the AP/HOLD180 button to switch of the autopilot.

7 Airplane and Systems Description

AP/HOLD180	Engages or switches off the autopilot. Holding the button for at least 5 seconds initiates a LEFT turn until opposite heading is achieved, then the autopilot holds this GPS track (if available) or heading.
HDG	Enables heading mode of the autopilot. The autopilot will keep a heading defined by the heading bug. Track is influenced by the wind aloft.
TRK	Enables track mode. Available only if NAVSRC is set to GPS. Similar functionality as HDG mode, but now a track is set by the heading bug. Heading of the aircraft is influenced by the wind aloft.
NAV	When NAVSRC is set to NAV, the autopilot will fly a selected radial. With NAVSRC set to GPS, the active waypoint flightplan will be flown. After the last waypoint passed, the autopilot will keep last track.
ALT	Enables altitude mode of the autopilot. This mode allows holding a certain altitude or climb/descent to a selected altitude.
VALUE	Press to select value to be adjusted, then rotate.

NOTE	Be responsible when flying with autopilot. The aircraft is not approved for flying in actual IMC.
-------------	---

NOTE	The autopilot does not look on a map or looks out of the window. The pilot in command is responsible for correct navigation (airspace, obstacles, terrain!!!)
-------------	---

7 Airplane and Systems Description

7.15 Inflight Entertainment

The aircraft is equipped with a 3.5mm jack or with RCA jacks for feeding in audio signals for inflight entertainment. Any audio source can be connected to these jacks, located in the center stack or in the right auxiliary panel.

Except of the PS-Engineering PM1000/II and the GARMIN GMA340 all intercom or audio panels allow coupling a cellphone, either direct via BLUETOOTH® or by a special cable that needs to be plugged in directly into the intercom. Once the cellphone is coupled with the aircraft audio system, telephone calls may be placed in flight, depending on reception and coverage of the telephone provider.

WARNING	Listening to music and/or telephone calls during flight may lead to inattention. Take care that you are always aware of the situation of the flight and stay ahead of the aircraft. If in doubt, switch off the audio entertainment, especially during take-off, landing and while talking with ATC and refrain from using the cellphone.
----------------	---

WARNING	National regulations may apply or using cell phones on board of aircraft.
----------------	---

GARMIN GMA240/245 intercom

Activate the audio-in signal by pressing “MUSIC” and then selecting “1”. To adjust the volume, pull the right knob and rotate it. In addition to that the GMA245 incorporates BLUETOOTH® interface to link your cellphone or iPhone® without additional cables.

NOTE	The audio signal will not fade if a radio call comes in or when the pilot and copilot talk to each other. Audio is faded only during alerts by the Dynon System. The music is not transmitted during radio calls.
-------------	---

7 Airplane and Systems Description

GARMIN GMA340 audio panel

Limited audio functionality is provided on aircraft equipped with only the GMA 340. GPS and audio-in cannot be put through the intercom at the same time. If audio is played, the 3.5mm jack of the Garmin GPS must be disconnected. Take out the GPS from the AirGIZMO, disconnect the audio wire and reinstall the GPS in the AirGIZMO.

NOTE	The audio signal will fade each time a radio call comes in or out, during alerts by the Dynon System and when the pilot and copilot talk to each other. Music is not transmitted during radio calls. The GPS will not put out any warnings or alerts if its audio wire is disconnected.
-------------	---

PS-Engineering PM1000/II

Just like on the GMA340, this comparable simple intercom provides limited audio-in functionality. GPS and audio-in cannot be put through the intercom at the same time. If audio is played, the 3.5mm jack of the Garmin GPS must be disconnected. Take out the GPS from the AirGIZMO, disconnect the audio wire and reinstall the GPS in the AirGIZMO.

NOTE	The audio signal will fade each time a radio call comes in or out, during alerts by the Dynon System and when the pilot and copilot talk to each other. Music is not transmitted during radio calls. The GPS will not put out any warnings or alerts if its audio wire is disconnected.
-------------	---

PS-Engineering PAR200A or PMA8000BT/i

These devices incorporate a BLUETOOTH® interface to link your cellphone or iPhone® without additional cables. Select BLUETOOTH coupling on your phone. The device is named PAR200A or PMA8000. The access code is 0000.

Muting modes may be selected as preferred: no muting, muting during radio call, muting during intercom or always muting.

7 Airplane and Systems Description

7.16 Engine Operation

The ignition and starter keylock is located in the lower part in the center stack; positions are off – left magneto – right magneto – both magnetos – start. The throttle in the center stack features a friction lock. An optional second throttle in the left auxiliary panel does not have a friction lock.



Carburetor heat and choke are located in the lowest position of the center stack. Carburetor heating is activated by pulling the yellow knob on top. Pull the green knob to choke the engine.



The oil temperature control is installed in the left auxiliary panel in the middle position. Push to increase temperature, pull to decrease temperature. When the aircraft is equipped with an oil thermostat instead of an oil cooler flap, this knob is not installed.



7 Airplane and Systems Description

7.17 Electric System

general

The electrical system of the REMOS GX is powered by a generator, which is capable of 250W at engine speeds of at least 4,000 RPM. At lower engine speeds the output of the alternator is lower. Below a certain engine speed, the alternator is not able to support the power demand for all electrical equipment. The exact engine speed is not easily defined and varies based on the equipment installed. The critical engine speed is around 2,500 RPM.

If your REMOS GX is operated in an environment where you have long taxiways or you operate the aircraft for prolonged time with low RPM, switch off electrical equipment that are not essential in order to conserve battery power. The following table gives an overview of the power consumption of your electrical equipment.

consumer	power [W]	current @ 12V [A]
Dynon D100	15	1,3
Dynon D120	12	1,0
Dynon HS34	5	0,4
FlymapL	42	3,5
Garmin GPS496	5	0,4
Garmin SL30 (standby)	11	0,9
Garmin SL30 (TX)	50	4,2
Garmin SL40 (standby)	5	0,4
Garmin SL40 (TX)	40	3,3
Garmin GTX328	20	1,7
Garmin GMA240	10	0,8
PM1000	10	0,8
ACL (LED)	37	3,1
ACL (XENON)	52	4,3
position lights	12	1,0
cockpit lights	6	0,5
landing light (LED)	24	2,0
landing light (Halogen)	50	4,2
electric fuel pump	20	1,7
elevator trim	4	0,3
flap drive	25	2,1
12V receptacle	12	1,0

7 Airplane and Systems Description

The aircraft is equipped with an ammeter, so the energy balance can be read. The ammeter is installed in a way that only the current into and out of the battery is indicated. Below the critical engine speed, the battery will be discharged, indicated by negative current. When reaching the critical engine speed, the indicated current will become zero. Above that speed the battery is charged, indicated by positive current.

NOTE	With engine idling or when taxiing with low RPM the alternator is definitely not able to cover the electric power consumption and the battery will be discharged.
-------------	---

aircraft battery capacity

The aircraft battery on the REMOS GX has a high responsibility regarding a reliable electric system.

Aircraft up to S/N 377 with electrical equipment according to min. equipment list for Day-VFR operations (see section 2) need a battery of at least 13Ah or at least 5Ah when electric retrofit kit according to G3-8 MA CP 0020 is installed.

Aircraft up to S/N 377 with electrical equipment exceeding Day-VFR min. equipment list or equipped according to min. equipment list for Night-VFR operations install min. 16Ah or min. 6Ah when electric retrofit kit according to G3-8 MA CP 0020 is installed.

Aircraft S/N 378 and above use min. 6Ah for any equipment.

Installation of battery with higher capacity than minimum specified is acceptable and recommended.

7 Airplane and Systems Description

aircraft battery type

Use approved battery types only. Only lead acid (AGM type preferred) and LiFePO4 batteries are approved by REMOS.

NOTE	Installation of NiCd, NiMH, Li-Ion or Li-Po is prohibited!
-------------	--

NOTE	Please refer to REMOS Service Bulletin SB-013 for further information.
-------------	--

LiFePO4 batteries require a voltage regulator and an overvoltage protection made by SCHICKE electronics. LiFePO4 batteries should preferably have an integrated battery management system for balancing, overload protection and deep-discharge protection. The LiFePO4 batteries must comply with UN Manual of Test and Criteria, Part III, Subsection 38.3 (abbreviated: UNT38.3).

recommendations

Charge your battery on a regular basis, especially in the cold time of the year. Take care to use the correct charger. In case a LiFePo4 battery is installed, be aware that this type of battery needs a special kind of charger. To avoid damage to the battery, do not use inappropriate or inexpensive chargers. Contact REMOS for recommendations of appropriate charging systems.

Take the battery out of the aircraft in winter time if you do not fly and stow it in a dry place at room temperature. Aircraft owners that operate their REMOS GX throughout the entire year, even in the cold winter time, or on airfields with long taxi distances, are strongly recommended to use a battery with a higher capacity than the minimum specified.

7 Airplane and Systems Description

aircraft battery specification

lead battery specification	
cold cranking amps	min. 150 A
battery type	starter lead battery (AGM preferred)
example	Hawker Odyssey PC545 Hawker Genesis 12EP13

lithium battery specification	
cold cranking amps	min. 150 A
battery type	LiFePO4
minimum battery equipment	overload protection overvoltage protection overtemperature protection under voltage protection cell balancing self-contained housing with vent
example	EarthX ETX900VNT

7 Airplane and Systems Description

switchboard

At the central control panel all controls of the REMOS GX are located. All switches are clearly labeled.



up to SN297



from SN298 on

The switch panel incorporates the following:

- electric trim control lever (blue, for aircraft up to SN297 only)
- flap control lever (white)
- anti collision light (ACL)
- electric fuel pump
- navigation lights
- instrument lights
- landing light
- autopilot engage
- trim position indicator (LED, left)
- flap position indicator (LED, right)
- throttle control with friction lock
- charge check light
- master and avionics switches
- ignition lock

7 Airplane and Systems Description

circuit breakers

The electrical system of the REMOS GX consists of a BUS system, split into master-BUS and avionics-BUS. All electrical components are protected with circuit breakers (CB). The fuse for the charge control check light is located behind the switch panel. An additional fuse for charging and for the regulator is located in front of the firewall, beneath the battery bracket.

Aircraft up to SN377 feature CB that have the appearance of fuses, though they are really circuit breakers. If a CB has released, the lip points out of the front side. To reset the CB, push in the lip. To release a CB manually, it must be pulled out of its socket.



aircraft up to SN377

From SN378 on, conventional circuit breakers have been installed. If a CB has been tripped, the black knob points out; in addition to this, a white ring is visible. To reset the CB, push in the knob. To release a CB manually, push on it.



aircraft from SN378 on

7 Airplane and Systems Description

7.18 Heating and Ventilation

The upper corners of the windscreen may feature fresh air nozzles. These nozzles can be adjusted in outlet direction. Airstream is adjusted by rotating the front ring.

Small vents are installed in the door windows. Pulling back the small handle allows opening the vents in two steps.

The center console features heating and fresh air control underneath of choke and carburetor preheat, marked red and blue for hot and cold air respectively. Pull on the knobs and adjust temperature and airflow until comfortable.

7.19 Flaps

Flaps on the REMOS GX can be selected at any position between 0° and 40° with the flap selector switch in the center stack, position of the flaps is displayed by the LEDs underneath the flap selector switch.

- Hold down the flap selector switch to select flap setting. Letting the switch go stops deploying flaps and keeps them in the selected position.
- Selecting the upper position of the flap selector switch will retract flaps completely. Retraction can be interrupted by manually switching into the middle position of the flap selector switch.



Maximum speed is limited depending on flap setting, see section 2.

7 Airplane and Systems Description

7.20 Cockpit Lighting

The REMOS GX cockpit features an effective LED panel lighting system, which can be dimmed independently from the instrument lights. It is a dazzle-free system designed for Night-VFR use.

The dim control knob is located on the upper left side of the cockpit frame. The system is activated when the instrument lighting switch located on the switchboard is switched on.



7.21 External Lights

The external lighting system consists of nav-lights, anti-collision lights (strobes) and a landing light. All external lights can be switched on and off by dedicated switches on the switchboard in the center stack.

NOTE	It is highly recommended to have all external lights switched on during the entire flight, no matter of weather conditions or daylight. Opposing traffic can identify the REMOS GX way better with lights on instead of having them switched off.
--------------------	--

7 Airplane and Systems Description

7.22 Seats

The seats can be installed in three different positions. The more forward the seat is installed, the higher is the seating position.

To take out the seat, press in the release knob underneath the seat close to the door about 1...2 inches. Now the seat can be lifted on its outboard side and pulled out towards the door.

Installation of the seat is done in reverse order. Slide in the two arresting pins of the seat into the desired position in the center console, push the release knob and push the seat down into its rail at the door. The seat taches once the release knob is released.

NOTE	Always check that the seats are safely locked.
-------------	--

7.23 Baggage and Luggage

Place light luggage below the luggage nets behind the seats. Larger baggage must be stowed in the baggage compartment behind the pilot seat. It is accessible with the pilot seat taken out.

Even if volume permits, the max. baggage is defined by weight, see section 2.


7 Airplane and Systems Description

7.24 Recovery System

The recovery system must be installed according to the approved procedures. The belts of the system are attached to the wing's main spar attachment fittings. They are protected against environmental conditions and are maintenance free. A check is neither required nor possible, as the belts are hidden within the airplane's structure.

The main belt is hanging inside the cabin. In case of an installed recovery system the parachute is connected to this belt by means of a snap hook.

WARNING	Any modification of the installation of the recovery system and any of its components is not authorized and will immediately lead into loss of certification of the airplane. Maintenance during the annual condition inspection must be performed according to the recovery system manufacturer's handbook.
----------------	--

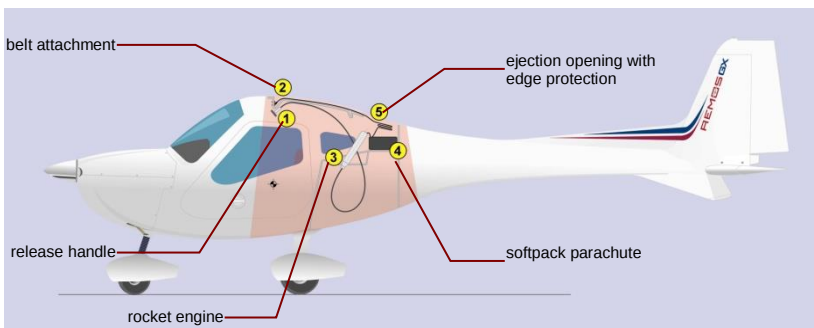


7 Airplane and Systems Description

7.25 Engine

The engine used on the REMOS GX is the ROTAX 912 ULS-2, which complies with ASTM F2239.

The engine is a 4 stroke, 4 cylinder horizontally opposed, dual carbureted, twin spark ignition engine with one central camshaft, pushrods and overhead valves. Cylinder heads are liquid cooled, the cylinders itself are cooled by ram air. Oil system is a dry sump with external oil reservoir.

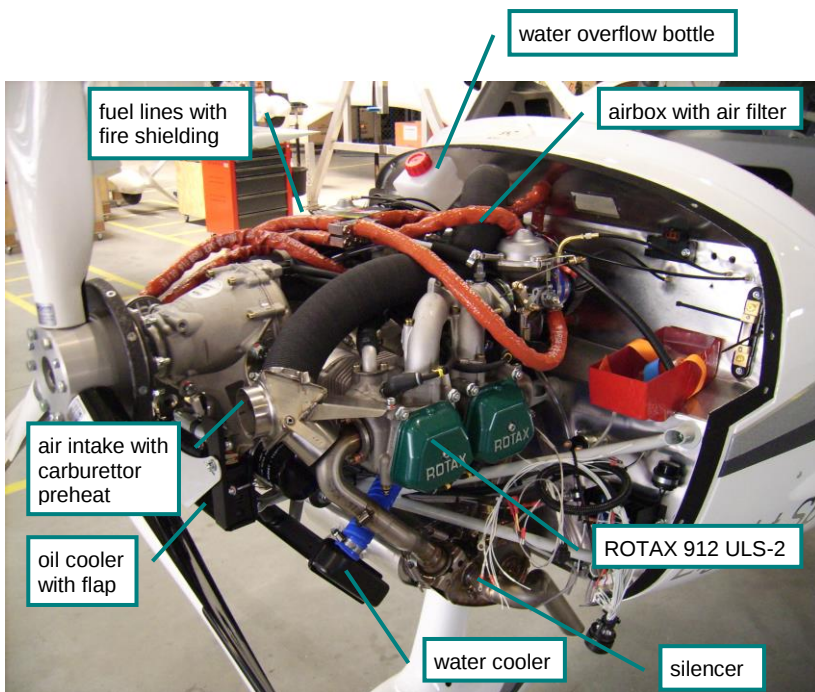

7 Airplane and Systems Description

7.26 Propeller

The aircraft may be equipped with one of the following propellers, that comes with individual instructions:

manufacturer	type and number of blades
1. Flii. Tonini	1. GT-169,5/164 2-blade, wood
2. Woodcomp	2. SR38+1 2-blade, wood
3. Sensenich	3. 2A0R5R70EN 2-blade, composite
4. Neuform	4. CR3-65-47-101,6 3-blade, composite

7.27 Fuel System

The fuel system of the REMOS GX consists of the following components:

- filler neck (lockable and non-lockable versions available)
- fuel tank (see section 2 and 7 and NOT-001 for fuel grades)
- fuel drainer
- fuel lines
- fuel pump
- fuel shut-off valve
- fuel divider
- fuel return line

7 Airplane and Systems Description




overview of airframe sided fuel system

7 Airplane and Systems Description



fuel shut-off valve

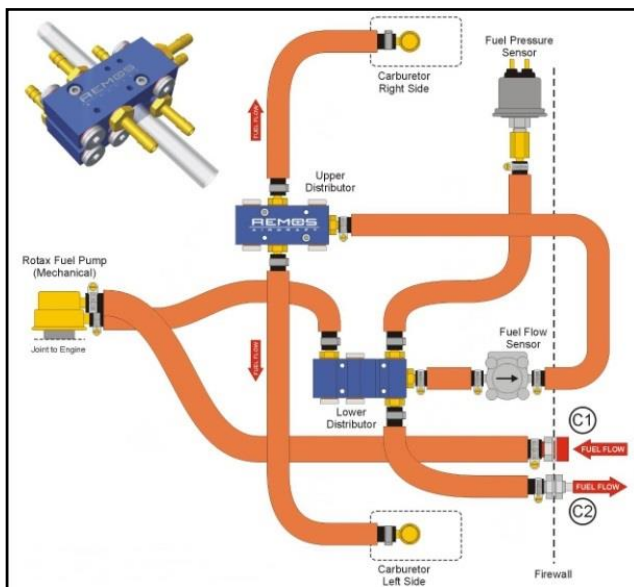

engine sided fuel system

7 Airplane and Systems Description

Fuel is fed from the fuel tank to the electric fuel pump. This pump is a boost pump that sets the fuel system under pressure and reliably prevents any tendency for vapor lock.

Through the fuel shut-off valve and the firewall, the fuel is routed towards the fuel divider. This unit provides ports for measuring fuel pressure and fuel flow and feeds the carburetors.

NOTE	With the fuel shut-off valve closed no fuel is fed to the engine and the engine will fail due to fuel starvation. It is recommended to always keep the fuel valve open. The fuel shut-off valve is a safety item to shut off the fuel in emergency situations and need not be closed for parking or hangaring.
-------------	--

NOTE	In case of a low fuel pressure warning cross check with fuel flow. As long as fuel flow gives reasonable indication, the reason for the warning is most probably found in the fuel pressure sensor or its sensing hose. Vice versa the same applies for the fuel flow sensor.
-------------	---

NOTE	It is recommended to keep the electric fuel pump switched on during the entire flight.
-------------	--

NOTE	Service with permitted fuel grade only and regularly drain the aircraft fuel system
-------------	---


For further information see maintenance manual section 12.

7 Airplane and Systems Description

7.28 Braking System

The braking system of the REMOS GX consists of the following components:

- reservoir
- master cylinder
- parking brake valve
- brake lines
- brake cylinder, brake disc and brake pads

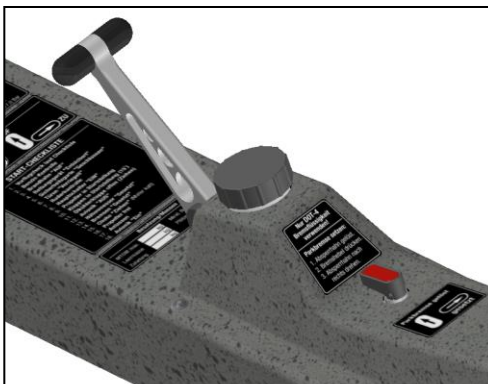

master cylinder with reservoir and parking brake valve

By pressing on the brake lever pressure is built up and is fed simultaneously through the brake lines to the left and right brake cylinders. For setting the parking brake press on the brake and whilst that turn the parking brake valve.

NOTE	Once the parking brake is set, additional braking is not possible. Be sure to always apply enough brake pressure before setting the parking brake and never taxi with the parking brake set.
------	--

NOTE	Change brake pads early enough, otherwise the brake cylinder may slide out of its housing and the brake is damaged.
------	---

7 Airplane and Systems Description

7.29 Special Equipment and Customizing

The aircraft may be equipped with special or additional equipment on customer's demand. The installation of this equipment must be certified and listed in the equipment list.

Avionics other than those mentioned in this manual may be installed on customer's demand. These avionics systems may replace the equipment mentioned in this manual in part or whole. The installation of this equipment must be certified and listed in the equipment list.

For operating instructions please refer to the manuals belonging to the equipment installed.

NOTE	The owner of the aircraft is responsible to keep the aircraft airworthy and comply with all applicable regulations.
-------------	---

7 Airplane and Systems Description

intentionally left blank

8 Aircraft Ground Handling and Servicing

Table of Content

sect.	description	page
8.1	Introduction	8-2
8.2	Checking and Servicing Coolant	8-2
8.3	Checking and Servicing Oil	8-2
8.4	Servicing with Fuel	8-3
8.5	Approved Coolant Grade and Specification	8-6
8.6	Approved Oil Grade and Specification	8-7
8.7	Approved Fuel Grade and Specification	8-8
8.8	Towing	8-10
8.9	Tie-Down	8-10
8.10	Rigging a Folded Aircraft	8-11
8.11	Folding a Rigged Aircraft	8-13
8.12	Transportation of the Aircraft	8-14
8.13	Cleaning and Care	8-14

8 Aircraft Ground Handling and Servicing

8.1 Introduction

This section gives guidance how to service the aircraft and how to handle it on ground. This section does not provide maintenance instructions.

Maintenance procedures are defined in the maintenance manual that is specific to the individual aircraft. All maintenance shall be performed according to the REMOS Service and Maintenance Checklist, available directly at REMOS or on the website www.remos.com

8.2 Checking and Servicing Coolant

The REMOS GX is designed to be easily serviceable. A flap in the upper cowling allows checking the coolant level in the overflow bottle without removing the cowling. Make sure there is at least 1 inch of coolant liquid visible in the overflow bottle.

In case coolant must be added, remove upper cowling and add coolant into the overflow bottle. This can be done with a cold or hot engine.

Approved coolant grade and specification can be obtained from section 8.5 of this manual.

8.3 Checking and Servicing Oil

The REMOS GX is designed to be easily serviceable. Access to all components which have to be lubricated or checked regularly is possible without detaching any panels. A flap in the upper cowling allows access to the oil bottle in order to check and add oil without removing the cowling.

For checking the oil remove the oil tank cap. Prior to oil check turn the propeller by hand in the direction of engine rotation several times to pump oil from the engine into the oil tank. It is essential to build up

8 Aircraft Ground Handling and Servicing

compression in the combustion chamber. Maintain the pressure for a few seconds to allow the pressure flow around the piston rings into the crankcase. The speed of rotation is not important for the pressure transfer into the crankcase. This process is finished when air is returning back to the oil tank and can be noticed by a murmur from the open oil tank.

The oil level should be between the minimum and maximum marking on the oil dipstick. Avoid oil levels exceeding the maximum mark as excess oil will be poured through the venting line.

Difference between “min” and “max” marking is app. 0.5 quarts.

Approved oil grade and specification can be obtained from section 8.6 of this manual.

8.4 Servicing with Fuel

fueling the aircraft

The fuel system is grounded to the aircraft engine and its subsystems. Before fueling have the aircraft grounded on the exhaust pipe underneath the front belly.

The filler cap is not locked. To open the filler cap (on fuselage shoulder behind right wing root) open lid and rotate about 1/8 turn, then pull filler neck out of fuel tank inlet. The filler cap is not connected with the aircraft, stow it separately while fueling the aircraft. The filler neck is sufficient in size to accommodate an AVGAS gas pump nozzle and the venting of the fuel tank allows quick filling.

When fueling the airplane, fuel will spill out of the venting line on the belly of the fuselage once the fuel tank is full. To avoid or minimize environmental pollution, put a vat underneath the venting line. Alternatively, fill up fuel until the sight gauge indicates full and do not add more than two US gallons beyond this point.

8 Aircraft Ground Handling and Servicing

shifting of CG

The fuel tank is located behind the CG, which in return travels aft when filling the tank. Due to the CG shift during fueling it is possible that the aircraft settles on its tail. This might happen especially with the baggage compartment loaded up to its limit and without an occupant. This does not indicate a CG out of range. Nevertheless, always have your weight and balance checked before take-off.

drainining

Since auto fuel contains a significant amount of ethanol nowadays, draining of the fuel system is more and more important. Draining of the aircraft must be performed before moving the aircraft at all. After re-fueling the aircraft, draining is also required. Give the fuel several minutes to rest after filling it up and do not move the aircraft prior to draining.

The drainer is located underneath the belly, just behind the main landing gear. From the outside, only a plastic hose with 0.5 in diameter is visible. To drain the fuel tank, press on the plastic hose. Capture the released fuel and analyze it for water.

If AVGAS or MOGAS is used, water will clearly deposit underneath the fuel. Continue draining until no more water can be detected.

In the case of auto fuel containing ethanol, water can be absorbed by the fuel up to a certain amount, so no water will be detected during draining. If the fuel looks like a milky dispersion, the fuel is saturated with water. In this case, dump all of the fuel, do not use this fuel for flying! After dumping fuel, fill up the fuel tank completely with fuel without ethanol.

To dump fuel, press in the plastic drainer hose and turn it counter-clockwise (as seen from bottom) about $\frac{1}{4}$ of a turn. To close the drainer, turn the plastic hose back. Be sure the drainer is properly closed. If dust or dirt particles get inside the drainer, the drainer will not close properly. In this case, open the drainer again to clean the drainer.

8 Aircraft Ground Handling and Servicing

When draining the aircraft, take care that no fuel contaminates the environment. Dispose of drained or dumped fuel in an environmental correct manner.

further information

For further information about fuel containing ethanol please refer to the REMOS Notification NOT-001-ethanol-fuel and the ROTAX Service Instruction SI-912-016 in its latest revision.

8 Aircraft Ground Handling and Servicing

8.5 Approved Coolant Grade and Specification

Coolant liquid consists of a mixture of water and Glysantin Protect Plus/G48. There are several coolant fluids on the market and some of them have been released by ROTAX as being suitable. However, REMOS has tested and therefore released only one specific coolant:

specification		conventional coolant with silicate-based corrosion inhibitor mixed with plain water	
coolant quantity	min.	2.2 ltr	= 2.4 qts
	max.	2.3 ltr	= 2.5 qts
approved coolant		BASF Glysantin Protect Plus/G48	

Under all normal operation conditions this cooling system and coolant should be sufficient. Should cooling temperature be in the critical range, the amount of water may be increased. This reduces coolant temperatures.

Pure water shall never be used as the coolant is not only protection against freezing, but also against corrosion and delays boiling. The content of Glysantin G48 shall never be less than 33% and never more than 60%.

Following mixing ratios shall be kept:

frost-proof up to	for ambient temperatures up to	share Glysantin G48	share water
-4°F (-20°C)	+100°F (+40°C)	1	2
-17°F (-27°C)	+95°F (+35°C)	1	1,5
-36°F (-38°C)	+86°F (+30°C)	1	1

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 latest revision for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc).
	Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.

8 Aircraft Ground Handling and Servicing

8.6 Approved Oil Grade and Specification

Due to high stresses in the reduction gears, oils with gear additives such as AeroShell Oil Sport Plus 4 are highly recommended. Because of the incorporated friction clutch, oils with friction modifier additives are unsuitable because this could result in clutch slipping during standard operation.

Avoid oils strictly specified for use in Diesel engines. These may not be suitable due to insufficient high temperature properties and additives that may affect the operation of the slipper clutch in the gear box.

There are several oils on the market and some of them have been released by ROTAX as being suitable. However, REMOS has tested and therefore released only one specific oil:

specification		RON 424		
viscosity		10W-40		
oil quantity	min.	2.0 ltr	=	2.1 qts
	max.	3.0 ltr	=	3.1 qts
approved oil		AeroShell Sport PLUS 4		

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 latest revision for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc).
	Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.

8 Aircraft Ground Handling and Servicing

8.7 Approved Fuel Grade and Specification

The use of automotive fuel, including such with up to 10% ethanol, is approved for the REMOS GX. Premium automotive fuel without ethanol is recommended, though. Such fuel is often referred as MOGAS.

The use of AVGAS, with or without lead, is approved on the REMOS GX, though fuel without lead shall be preferred as prevailing use of 100LL reduces oil change interval from 100h to 50h.

Fuel additives under the names of Decalin® and Alcor TCP®, which aid the scavenging of lead deposits, have not been tested by ROTAX or REMOS. Field experience shows that these products have no detrimental effect on the engine, when used in the recommended manner. Always follow the additive's manufacturer instructions especially with regard to health and safety precautions. ROTAX only has field experience with Decalin Runup® and Alcor TCP® brands. Other similar additives are not recommended as ROTAX cannot comment on their suitability.

fuel quantity	total	84 ltr = 22 US gal
	usable	80 ltr = 21 US gal
fuel qualities		fuel released by latest revision of ROTAX service instruction SI-912-016, preferably free of ethanol.

NOTE	Please refer to REMOS notification NOT-001 and ROTAX SI-912-016 latest revision for further information on suitable engine fluids (fuel, oil, cooling liquid, additives, etc).
	Have a frequent look on www.flyrotax.com and on www.remos.com for the latest information.

8 Aircraft Ground Handling and Servicing

At the time of releasing this POH, following fuels have been found suitable by ROTAX and have been approved by REMOS. This list may be revised by a REMOS NOTIFICATION.

minimum fuel grade	RON 95 (research octane number) MON 87 (motor octane number) AKI 91 (anti knock index)
---------------------------	--

MOGAS	European standard	EN 228 Super EN 228 Super plus
	Canadian standard	CAN/SGSB-3.5 Quality 3
	Russian standard	R 51105-97 Premium 95 Super 98 R51866-2002 Premium Euro 95 Super Euro 98
	South African standard	SANS 1598:2006 Clean Fuels (CF2)
	US standard	ASTM D4814 min. AKI91)
	Ukrainian standard	DSTU 4839-2007 A-95 Euro A-98 Euro
	Indian standard	IS 2796:2008 MG95
	unleaded brand (*)	GAZPROM B-92 GAZPROM B-92/115

8 Aircraft Ground Handling and Servicing

AVGAS	leaded	ASTM D910 (AVGAS 100LL)
	unleaded	ASTM D7547 (AVGAS UL91)
	unleaded brand (*)	HJELMCO 91/96 UL HJELMCO 91/98 UL TOTAL AVGAS UL91

(*) Fuels were verified as good by ROTAX at the time of release of this handbook. REMOS and ROTAX reject any liability if the fuel manufacturer changes the composition of the fuel.

8.8 Towing

Due to the low weight of the REMOS GX, it is very easy to move the aircraft by hand on the ground. That's why there is no special equipment for towing provided. Do not attempt under any circumstances to tow the aircraft by attaching any kind of towing equipment to the nose wheel!

Grab the aircraft at the propeller roots just outside the spinner to pull it forward. For pushing the aircraft backward it is recommended to push at the root of the horizontal tail. Bushing backward is also permitted at the strut. If this is done with open doors, one can grab the rudder pedal to steer backward.

8.9 Tie-Down

To tie down the aircraft we recommend the use of at least three ropes (left wing, right wing, and tail). Tie down each wing by attaching the rope to the lug located on the upper strut bracket. Another rope connection point is provided on the tail skid of the aircraft. When necessary, a fourth rope can be slid around the propeller/gear drive shaft at the nose of the aircraft.

8 Aircraft Ground Handling and Servicing

Aircrafts from SN380 are equipped with a metric M8 thread on the lower side of the wing near the wingtips and are provided with bolt-in lugs. If required, bolt in the lugs and tie down the aircraft there. Do not fly with the tie-down lugs installed!

An additional rope may be applied to the propeller. Wrap the rope around the spacer between spinner and prop flange of the engine, accessible through the gap between cowling and spinner. In order to avoid damages to the spinner do not wrap the rope around the prop blade roots.

Secure the control stick by use of the safety belt to prevent the control surfaces from being slammed from stop to stop by the wind.

NOTE	The maximum wind velocity to leave a tied down aircraft in the open is 38 kts.
-------------	--

8.10 Rigging a Folded Aircraft

The REMOS GX is manufactured to the highest quality standards. All components are very precise and provide the maximum aerodynamic quality. It is therefore strongly recommended that you be very careful when assembling or disassembling components such as the wings, stabilizer and other parts. The following instructions will provide you with all the necessary information.

NOTE	Folding or unfolding the wings and attaching or detaching the horizontal tail is a two person procedure. Do not try this alone. Severe damage to the aircraft may result.
-------------	---

tools and equipment

- bolt release tool (provided with the aircraft)
- screwdriver (Philips head)
- grease for bolts

8 Aircraft Ground Handling and Servicing

connecting folded wings to the fuselage

1. Withdraw the main wing securing bolt from the wing and place it nearby. Ensure that the bolt stays clean until remounted.
2. Remove the wing support aid bracket while a second person supports the wing at the wing tip.
3. Now the second person at the wing tip moves the wing slowly forward while ensuring that the wing does not spin around its axis. The weight of the wing is supported by its strut, therefore, the wing must never be lifted or pushed down from the top.
4. When the wing has reached its maximum forward position, the person at the fuselage position must rotate the wing to align both connection latches. Care must be taken that the surface of the wing is not damaged by the fuselage connecting latches.
5. When the connecting latches between the fuselage and wing are aligned, the wing must be lifted by the person at the wing tip. The person at the fuselage must ensure that the flap drive connection fits correctly into the bushing on the fuselage.
6. If all latches have engaged and the wing fits properly to the fuselage, the main bolt can be pushed into its support tube. To install the main bolt correctly, please use the special installation tool which comes with the aircraft. Now secure the bolt with the securing pin. The person at the wing tip can now release the pressure supporting the wing tip.

7. Inside the cabin, the pushrod quick fasteners MUST properly be connected and secured.

Insecure connection, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!! When in doubt contact your local REMOS dealer or service center.

8. Proceed in the same order with the second wing.

8 Aircraft Ground Handling and Servicing

installing the horizontal tail

1. Hold the horizontal tail in place so that the bushings in the fuselage match up with those in the horizontal tail.
2. Apply the attachment bolts from left to right into their bushings. The forward bolt is marked by a "V", the rearward bolt by "H".
3. Align the hole of the attachment bolt with the one in the right bushing and secure the bolts with Fokker needles.
4. Connect the cable plug for the electric trim actuator

5. The pushrod quick fastener **MUST** be connected properly and secured.

Insecure connection, improper operation of control surfaces or insecurely locked fasteners will lead to loss of control of the aircraft!! When in doubt contact your local REMOS dealer or service center.

6. Attach the tail cover and secure it with the screws provided. Connect the electric jack for the taillight.

After rigging the aircraft perform a thorough preflight check.

8.11 Folding a Rigged Aircraft

To disassemble the aircraft, perform the above described procedures in reverse order.

8 Aircraft Ground Handling and Servicing

8.12 Transportation of the Aircraft

If you intend to store the aircraft with the wings folded, we recommend using REMOS folding wing supports (ask your local dealer). With these supports mounted, the wings are secured properly and handling of the aircraft will be much easier.

When the aircraft has to be moved by trailer, please ask your authorized REMOS dealer for advice. When placed on a trailer in a wrong way, serious damage could result.

8.13 Cleaning and Care

After every day of flight, it is recommended that you clean the surface of the aircraft using pure water and a soft cotton towel only. Take special care when cleaning the windows to use lots of water to loosen and rinse away bugs and dirt and use only a soft cotton towel, or otherwise you will create scratches. If cleaned regularly, you may not need to use any special cleaning products. If for any reason special cleaning products need to be used, please contact your dealer for advice. For polishing you can use almost any car polish but be sure that no silicone is used in that product.

8 Aircraft Ground Handling and Servicing

intentionally left blank

Imprint

Pilot Operating Handbook REMOS GX

ASTM Edition

Copyright REMOS AG

© REMOS 2007-2017, all rights reserved

REMOS



REMOS GX

POH Supplement – Flight Training

Supplement Flight Training

Table of Content

sect.	description	page
1	Introduction	9-2
2	Take-Off	9-3
3	Climb	9-4
4	Cruise	9-5
5	Stall	9-6
6	Slip	9-7
7	Glide	9-8
8	Descent	9-9
9	Approach	9-10
10	Touch Down	9-13

1 Introduction

This chapter should enable you to familiarize yourself with the flight performance and flight characteristics of the REMOS GX. To complete these instructions, please refer to the appropriate sections in the POH.

The following pages describe flight characteristics experienced during various flight configurations and weather conditions:

- Take-off
- Climb
- Cruise
- Stall
- Slip
- Glide
- Descent
- Approach
- Touch down

NOTE	This chapter was introduced as an additional guide to experience the capabilities of the aircraft. It is not a substitute for flight school training! If you are not yet familiar with the aircraft, we strongly recommend that you follow these instructions only when accompanied by a skilled flight instructor.
-------------	---

NOTE	This supplement does not provide checklists or substitutes checklists given in the main part of the pilot operating handbook. This supplement gives additional information on how to handle the aircraft.
-------------	---

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

2 Take-Off

Take-off under normal conditions

1. After the pre-flight check has been completed, buckle up, warm up the engine and line up on the active runway. Keep flaps up. Take-off may also be performed with flaps 15deg, but this leads to higher pilot workload and the slightly shorter take-off distance with flaps 15deg is often not a limiting criterion.
2. Ensure that the elevator trim is in the correct position (green line on the trim indicator or about mid position).
3. Whenever possible, take-off directly into the wind. The maximum demonstrated crosswind component is 15 kts.
4. Smoothly apply full throttle (fully forward) and maintain runway heading.
5. As the aircraft accelerates, gently pull back on the control stick to raise the nose slightly until the aircraft becomes airborne at about 50 KIAS.
6. Once airborne, slowly release the back pressure on the control stick to allow the airspeed to increase to airspeed of best rate of climb, i.e. 60 KIAS. Maintain this speed and avoid making any climbing turns until a sufficiently safe altitude has been reached.
7. When at safe altitude, retract the flaps (if they were deployed).

Take-off under tailwind conditions

Similar to normal take-off except that the take-off distance will be significantly longer and the climb angle will be drastically reduced. Ensure that you determine the take-off distance required to ensure you have sufficient runway length prior to take-off.

Take-Off in rain or with a dirty aircraft

Surface conditions, high density altitude and temperatures, raindrops and bugs affect the performance of the aircraft. Be aware that in these conditions the performance figures will not meet the published figures, as they apply to a clean aircraft under standard atmospheric conditions. Expect a significant drop in performance.

3 Climb

Climb with Best Angle of Climb

With engine set to full power, establish $V_X = 50$ kIAS for all flap settings. At this airspeed the aircraft will achieve the steepest angle of climb. During climb it is essential to monitor oil and water (CHT) temperatures. Adjust the oil temperature regulation flap as required.

Climb with Best Rate of Climb

With engine set to full power, establish $V_Y = 60$ kIAS for all flap settings. At this airspeed the aircraft will achieve the best rate of climb. During climb it is essential to monitor oil and water (CHT) temperatures. Adjust the oil temperature regulation flap as required.

Climb while in cruise

If you wish to climb in cruise, select an airspeed between 70 to 80 kIAS. At these speeds, the aircraft will climb between slower than best rate of climb due to the higher airspeed.

NOTE	It is strongly recommended that you monitor oil and water (CHT) temperatures. Under no circumstances should any of the engine temperature limits be exceeded, otherwise, an engine failure may result.
-------------	--

Climb in rain or with a dirty aircraft

Raindrops and bugs affect the performance of the aircraft. Be aware that in these conditions the performance figures will not meet the published figures, as they apply for a clean aircraft under standard atmospheric conditions. Expect a performance loss of 10% to 15%.

4 **Cruise**

Normal cruise

An economical cruise is flown at engine speeds of 4,400 RPM to 5,000 RPM. With the Sensenich or Neuform propeller this will result in airspeeds between 85 kTAS and 100 kTAS with a fuel flow between 4 and 5.5 gph

High speed cruise is done with engine speeds between 5,000 RPM and 5,400 RPM. With the Sensenich or Neuform propeller this will result in airspeeds between 100 kTAS and 115 kTAS with a fuel flow between 5 and 7 gph.

If required, the aircraft is capable of achieving an airspeed up to 115 kTAS at full power. If doing so, always monitor the engine speed. The maximum continuous engine speed is 5,500 RPM and may only be exceeded for 5 minutes. Never exceed the maximum engine speed of 5,800 RPM.

Cruise in gusty conditions

When flying in gusty weather conditions, the normal operating airspeed $V_{NO} = 107$ KIAS should not be exceeded for safety reasons. The REMOS GX offers very stable flight characteristics even in heavy weather conditions.

Cruise in rain or with dirty aircraft

Raindrops and bugs affect the performance of the aircraft. Be aware that in these conditions the performance figures will not meet the published figures, as they apply for a clean aircraft under standard atmospheric conditions. Expect a performance loss of 10% to 15%. When flying in rain always activate the carburetor heat.

5 Stall

The REMOS GX is fully controllable when flying at a wide range of airspeeds. At airspeeds below the lower speed limit, the aircraft will display very stable stall characteristics. If the airspeed is reduced by the pilot gradually pulling back on the control stick, aerodynamic buffet will occur, indicating that the aircraft is approaching the stall speed. Should the aircraft then be allowed to stall, the aircraft will still remain controllable. The aircraft can be stalled with flaps both extended or retracted.

Performing a stall maneuver does not require special skills. However, if you are not yet familiar with the aircraft, we recommend you do this exercise only when accompanied by an experienced flight instructor.

6 Slip

The slip is a very stable flight condition and is also very easy to perform. This maneuver is used to increase aerodynamic drag to enable a high rate of descent.

Before establishing a slip, you have to ensure that the airspeed is within the required limits. The operating maneuvering speed $V_A = 88$ kIAS (valid for max. take-off weight, see section 2) may not be exceeded.

When performing a slip with flaps extended, a maximum indicated airspeed of $V_{FE} = 78$ kIAS may not be exceeded. You will achieve the maximum rate of descent when slipping with flaps fully extended and flying at V_{FE} .

Conducting a slip does not require special skills. However, if you are not yet familiar with the aircraft, we recommend to do this exercise only when accompanied by an experienced flight instructor.

7 Glide

The aircraft can glide well with the engine off. Best glide ratios are achieved within an indicated airspeed of 60 kIAS. These speeds will establish a glide ratio of about 1:11 with the flaps retracted (0° position).

8 Descent

When descending from level flight it is important to monitor engine temperatures. During descent, the temperatures will decrease, which could cause engine failure or carburetor icing to develop. Therefore we strongly recommend that you not exceed the lower limits of these temperatures. Engage carburetor heat before beginning the descent.

9 Approach

Approach under normal conditions

Always land on the most suitable runway, taking into consideration wind direction, length of runway, obstacles on the approach, etc. It is recommended to fly the approach at 60 KIAS. The recommended target airspeed (airspeed on short final in app. 50ft altitude) for approach at MTOW is 52 KIAS.

In landing configuration, the airplane is very draggy and the propeller provides additional braking. Therefore, airspeed bleeds off quickly during flare. It is easy to misjudge altitude during flare. When flare is initiated too high and airspeed bleeds away the airplane may stall or bounce.

In doubt or without an urge to achieve shortest landing distance as possible, keep a higher target airspeed. Rule of thumb: Keep it at sixty knots! Or use all your guts.

Approach under tailwind conditions

When on final approach with a tailwind component, the REMOS GX does not require different approach or flare procedures than those used in calm or headwind conditions. However, you do have to keep in mind that the landing distance will increase significantly.

Approach in crosswind conditions

Crosswinds do not have a big effect on the flight characteristics of the REMOS GX, as long as the cross-wind component stays within the maximum demonstrated speed of up to 15 kts. Performing a crosswind landing does not require above-average piloting skills. Nevertheless, if not yet familiar with the aircraft, we recommend that you perform crosswind landings only when accompanied by an experienced flight instructor until sufficient experience has been gained.

9 Approach

Approach in turbulent weather conditions

It is recommended to fly the entire approach at 60 KIAS. This will give you a reserve airspeed to balance any unexpected deviations in altitude and heading.

In more gusty conditions it may be beneficial to stabilize the glide slope by keeping the flap setting to the 15° position.

Approach in rain showers

Raindrops on the wing surfaces influence the aerodynamic characteristics of the airfoil; drag will increase while lift decreases. The airfoil used on the REMOS GX features stable flight characteristics in rainy conditions. Therefore, there are no special advisories for flights within rain. We recommend that you operate the aircraft as you would in turbulent weather conditions (see "Approach in turbulent weather conditions"). When flying in rain always activate the carburetor heat.

Approach in the slip configuration

If a high descent rate is required on final, we recommend that you conduct a slip maneuver. Conducting an approach in the slip configuration does not require special skills, however, if you are not yet familiar with the aircraft we recommend that you do this exercise only when accompanied by an experienced flight instructor.

10 Touchdown

The aircraft has very good low speed characteristics and as such is easily controllable all the way through the landing phase. After a good approach has been conducted, the REMOS GX does not require much action to land with a perfect touch down. It is important to establish a safe and stable airspeed during the approach.

Imprint

Pilot Operating Handbook REMOS GX
Supplement Flight Training

ASTM Edition

Copyright REMOS AG
© REMOS 2007-2017, all rights reserved

REMOS



REMOS GX

POH Supplement – Glider Towing

Supplement Glider Towing

Table of Content

sect.	description	page
1	General Information	10-2
2	Operating Limitations	10-3
3	Emergency Procedures	10-5
4	Normal Procedures	10-7
5	Performance	10-10
6	Weight and Balance	10-16
7	Systems	10-17
8	Aircraft Ground Handling and Service	10-18

1 General Information

1.1 Introduction

This supplement is to be used only in addition to the REMOS GX Pilot Operating Handbook!

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

1.2 Certification

The REMOS GX is manufactured in compliance with the rules of the Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.

1.3 Quick Reference

For use as a glider towing aircraft, the REMOS GX is equipped with the TOST E85 tow release clutch, which is connected to the fuselage tail by a specially developed mounting frame. To release the tow rope a release lever is located on the left hand side of the pilot seat (colored yellow). Additionally, a rear view mirror must be installed inside the aircraft, above the pilot seat.

2 Operating Limitations

2.1 Towing Speed

max. towing speed	V_T of glider
min. towing speed	$1,3V_{S1}$ of glider, at least 50 kIAS

2.2 Tow Ropes

length of tow rope	130 to 200 ft
weak link	max. 300 dN

2.3 Maximum Glider Take-Off Weight

The maximum permissible take-off weight of the glider to be towed varies with the propeller mounted to the REMOS GX. The following operating limitations may not be exceeded:

Propeller	Glider	
Tonini GT-2	1,210 lb	[550 kg]
Woodcomp SR38+1	1,210 lb	[550 kg]
Sensenich R70EN	1,580 lb	[720 kg]
Neuform CR3-65	1,580 lb	[720 kg]
Rospeller	1,430 lb	[650 kg]

2.4 Crew

During glider towing operations the REMOS GX must be operated only by one pilot (no passenger allowed, except for training/instruction). In all cases, the total take-off weight (towing aircraft + glider) must not exceed 2,900 lb [1,315 kg].

2 Operating Limitations

2.5 Minimum Equipment List

- as per D-VFR minimum equipment list, plus
- TOST tow release clutch type E85
- REMOS mounting frame for tow release clutch
- yellow colored release handle
- rear view mirror placed on main spar carrythrough

2.6 Flying Without Doors

not permitted during towing operations

2.7 Required Placards and Markings

Adjacent to the airspeed indicator:



Adjacent to the tow release handle:



At the release clutch bracket:



3 Emergency Procedures

3.1 Engine Failure Procedure

Case 1: altitude not enough for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. glider pilot NOTIFIED
4. glider pilot RELEASE ROPE
5. engine OFF
6. fuel valve CLOSE
7. declare emergency MAYDAY MAYDAY MAYDAY
8. master switch OFF
9. safety belts TIGHTEN
10. tow rope RELEASE
11. emergency landing APPROPRIATE TERRAIN

Case 2: altitude sufficient for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. glider pilot NOTIFIED
4. glider pilot RELEASE ROPE
5. carburetor heat PULL
6. electric fuel pump ON
7. choke OFF
8. starter ENGAGE
9. if engine does not start continue with case 1
10. if engine starts, continue flight and land on an airfield

3 Emergency Procedures

3.2 Abnormal Flight Attitude Procedure

1. AVIATE – NAVIGATE – COMMUNICATE
2. glider pilot NOTIFIED
3. engine REDUCE POWER
4. glider pilot RELEASE ROPE
5. recover gently and return to an airfield

NOTE	If the glider pilot cannot recover from the abnormal flight attitude and does not or cannot release the tow rope, the REMOS GX pilot must release the tow rope to recover from the abnormal flight attitude.
-------------	--

NOTE	If the abnormal flight attitude cannot be recovered from at all, the tow rope cannot be released, or the weak link does not break, activate the recovery system.
-------------	--

3.3 Failure of the Release Clutch Procedure

1. approach airspeed $V_{APP} = 60$ KIAS
2. full flaps airspeed $V_{FE} = 78$ KIAS
3. flaps DOWN
4. variable pitch prop 5,600 rpm
5. engine power AS REQUIRED
6. elevator trim AS REQUIRED
7. electrical fuel pump ON
8. touchdown on main wheels first with elevator fully held back.

NOTE	The rope will hang down significantly from the aircraft due to its own weight. Therefore it can become tangled with obstacles, plants, wires, vehicles, persons, etc.
-------------	---

4 Normal Procedures

4.1 Preflight Check Checklist

1. Perform standard preflight check
2. Check tow release clutch and test-release a tow rope

4.2 Take-Off Procedure

- | | |
|-----------------------|---------------|
| 1. oil cooler flap | OPEN |
| 2. carburetor heat | OFF |
| 3. electric fuel pump | ON |
| 4. landing light | RECOMMENDED |
| 5. flaps | 15 degrees |
| 6. elevator trim | 2/3 UP |
| 7. rudder and aileron | NEUTRAL |
| 8. taxi forward | ROPE STRAIGHT |
| 9. engine power | FULL POWER |
| 10. rotate | 45 KIAS |
| 11. lift-off | 50 KIAS |
| 12. best climb | 60 KIAS |
| 13. flaps | RETRACT |

NOTE	During take-off, special care must be taken that the climb rate and airspeed are compatible with the required values of the towed glider. Watch your rate of climb immediately after take-off (do not exceed the glider's climb capability).
-------------	--

NOTE	To maintain permissible water and oil temperatures during climb and descent, the aircraft must be equipped with an oil temperature regulation flap. During climb the operating lever of this flap should be in the "open/cooler" position.
-------------	--

4 Normal Procedures

4.3 Climb

Briefing

Flight tests have been conducted with various glider airplanes. These tests revealed that modern composite gliders, especially when loaded with water ballast, must be towed faster than older wooden sailplanes.

The modern gliders are usually towed with airspeeds of 75 mph = 65 kts or possibly above that with flaps retracted. Older sailplanes can be towed with airspeeds as low as 48 mph = 56 kts; in that case select the 15 degrees flap setting.

4.4 Descent

Checklist

- | | |
|----------------------------|--|
| 1. flaps | CLEAN |
| 2. engine speed | AS REQUIRED |
| 3. electric fuel pump | ON |
| 4. maneuvering speed | $V_A = 88$ KIAS |
| 5. normal operating speed | $V_{NO} = 107$ KIAS |
| 6. never exceed speed | $V_{NE} = 135$ KIAS |
| 7. max. cont. engine speed | 5,500 rpm |
| 8. carburetor heat | RECOMMENDED |
| 9. landing light | RECOMMENDED |
| 10. oil cooler flap | AS REQUIRED |
| 11. CHT or coolant temp. | max. 275°F = 135°C
max. 248°F = 120°C (w/ SB-012) |
| 12. oil temperature | 120...266°F = 50...130°C |

NOTE

Special care must be taken to keep all temperatures within the permissible range. To keep temperatures within the proper operation levels, the throttle may be left at a setting just above the idle position. Do not allow the oil temperature to drop rapidly.

4 Normal Procedures

4.5 Approach Checklist

- | | |
|------------------------------|--|
| 1. wind, weather, visibility | OK |
| 2. ATIS | CHECKED |
| 3. runway | CORRECT DIRECTION |
| 4. traffic pattern | ALTITUDE and ROUTING |
| 5. radios | ON and FREQUENCY SET |
| 6. transponder | AS REQUIRED |
| 7. carburetor heat | AS REQUIRED |
| 8. oil cooler flap | AS REQUIRED |
| 9. electric fuel pump | ON |
| 10. CHT or coolant temp. | max. 275°F = 135°C
max. 248°F = 120°C (w/ SB-012) |
| 11. oil temperature | 120...266°F = 50...130°C |
| 12. full flaps airspeed | $V_{FE} = 78$ KIAS |
| 13. approach airspeed | $V_{APP} = 60$ KIAS |
| 14. flaps | AS REQUIRED |
| 15. landing light | RECOMMENDED |


4.6 Landing Procedure

- | | |
|-----------------------------------|----------------------|
| 1. full flaps airspeed | $V_{FE} = 78$ KIAS |
| 2. approach airspeed | $V_{APP} = 60$ KIAS |
| 3. flaps | DOWN |
| 4. target airspeed | $V_T = 50$ KIAS |
| 5. engine power | AS REQUIRED |
| 6. elevator trim | AS REQUIRED |
| 7. tow rope | RELEASE ON THRESHOLD |
| 8. touchdown on main wheels first | |
| 9. brakes | AS REQUIRED |

5 Performance

5.1 Take-Off Roll Distance


If the REMOS GX is equipped with a Sensenich R70EN or a Neuform CR3-65 propeller, the following take-off roll distances apply (under the conditions of a hard surface runway, ISA conditions, no wind and lift-off at 50 kIAS).

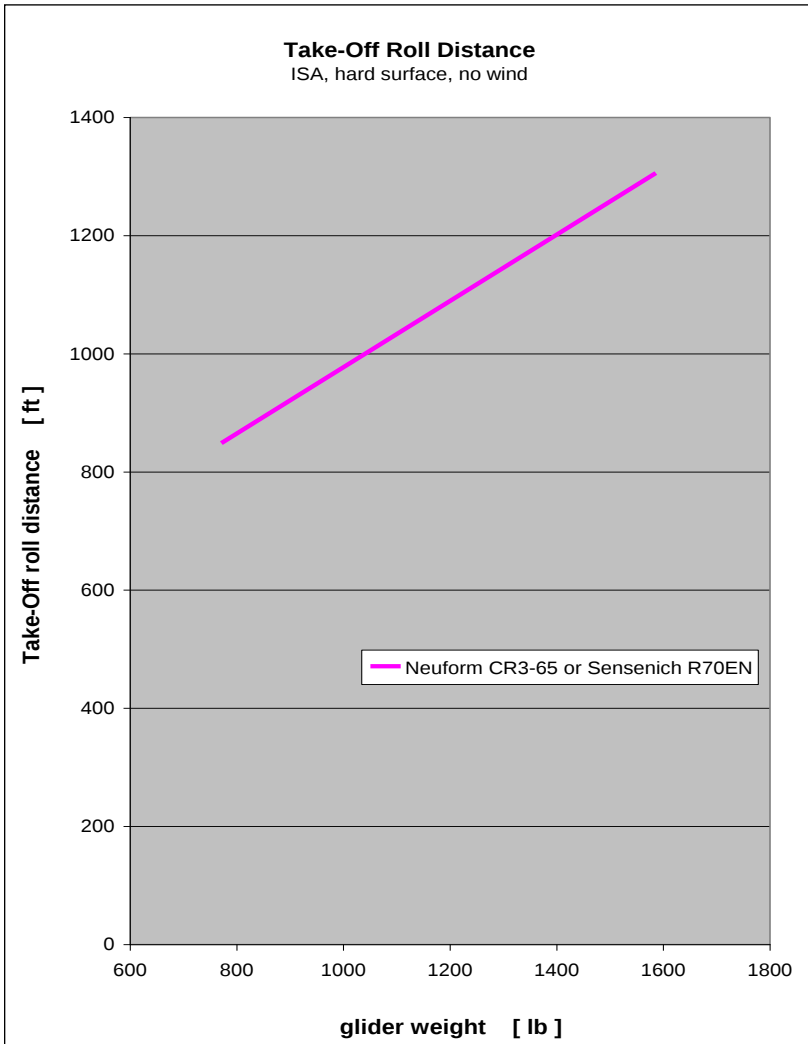

5 Performance

5.2 Take-Off Air Distance


If the REMOS GX is equipped with a Sensenich R70EN or a Neuform CR3-65 propeller, the following take-off air distances apply (under the conditions of a hard surface runway, ISA conditions, no wind and lift-off at 50 kIAS).

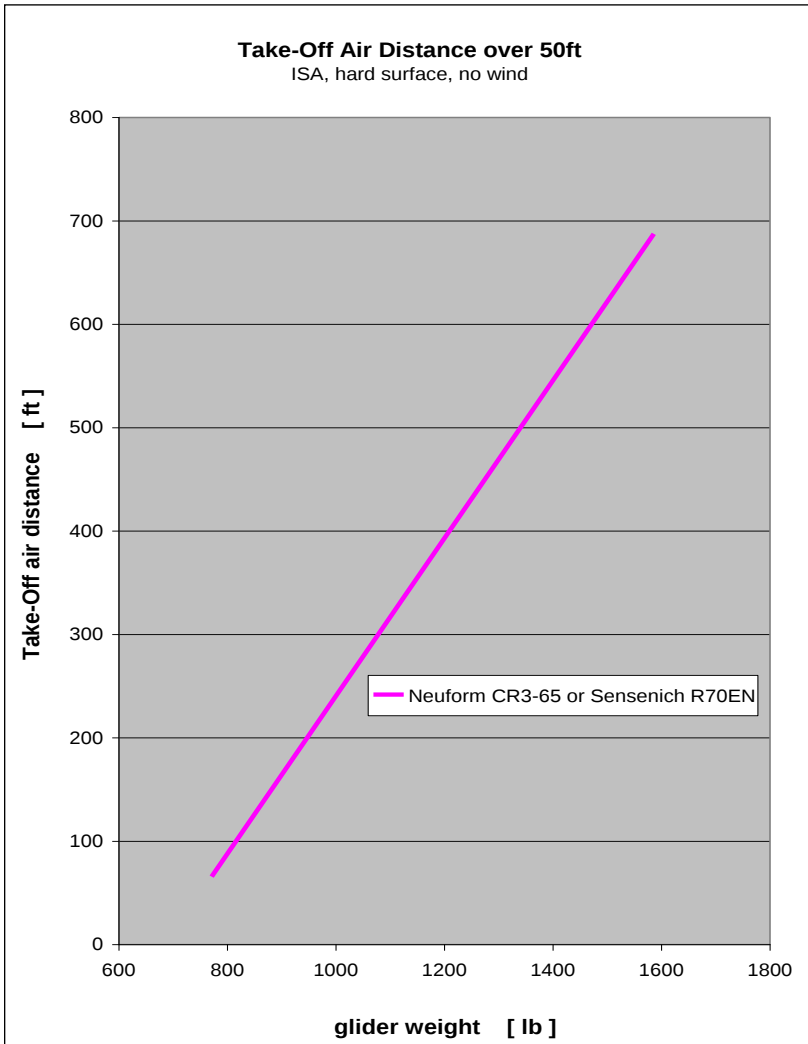

5 Performance

5.3 Take-Off Distance over 50ft

The following diagram presents the total take-off distance over 50ft (under the conditions of a hard surface runway, ISA conditions, no wind and lift-off at 50 kIAS).

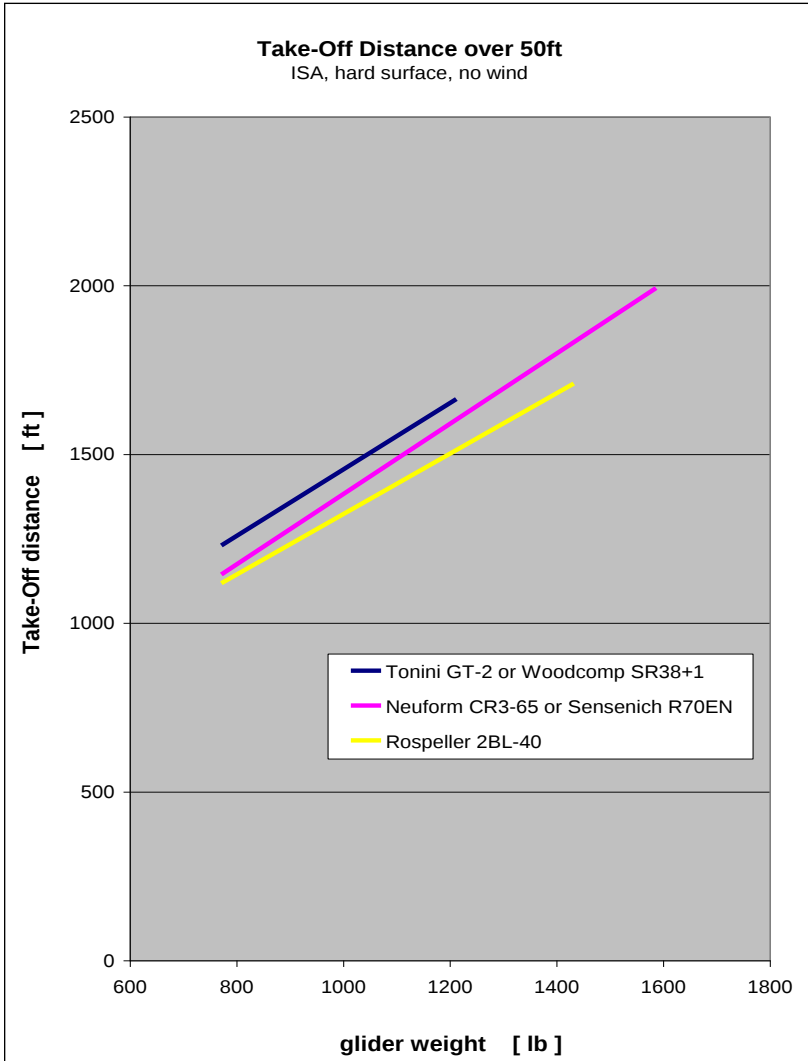

5 Performance

5.4 Effects on Take-Off Distance

Performance data apply under ISA conditions on an even, dry, hard runway surface. Various circumstances have an effect on take-off performance. According to CAA-circular AIC 127-2006, it is recommended to use following add-ons on roll- and air distances:

add-ons on take-off roll distance	
for dry grass	+ 20%
for wet grass	+ 30%
for soft surface	+ 60%
per 5 knots tailwind component	+ 20%
per 2% uphill slope	+ 10%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft


add-ons on take-off air distance	
for dirty or wet wings	+ 30%
per 5 knots tailwind component	+ 20%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft

NOTE	Reduction of take-off distances due to downhill slope or headwind must not be taken into account.
-------------	---

NOTE	Especially in glider towing the take-off distances can vary significantly with precise flying habits and the drag of the glider.
-------------	--

5 Performance

ISA std. Temperature

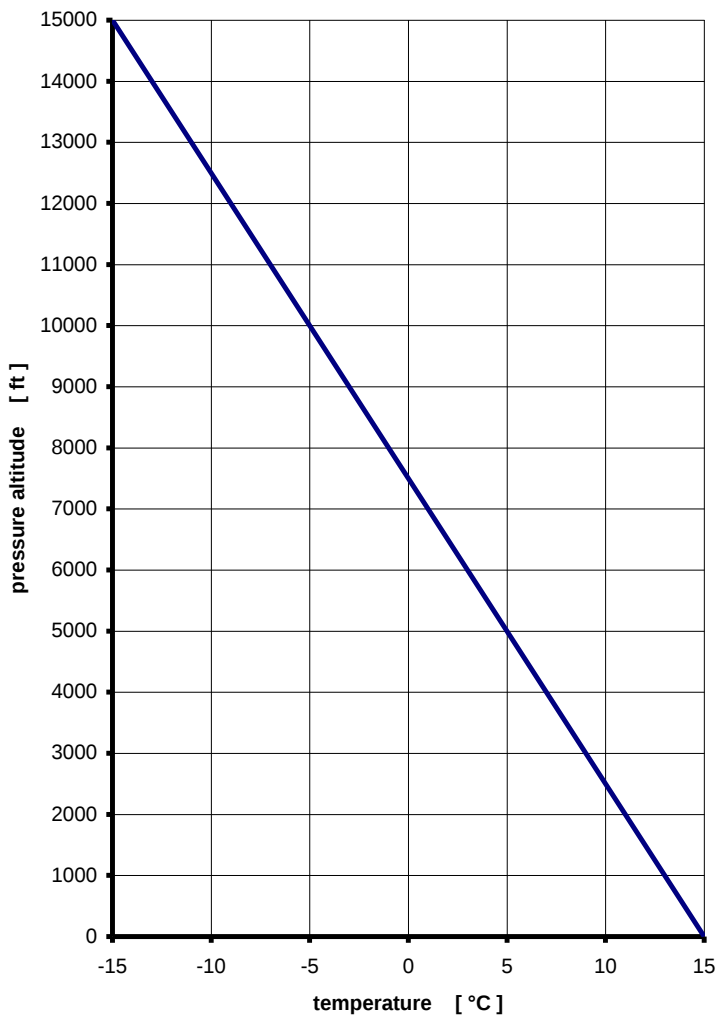

5 Performance

5.5 Tested Glider Configuration

The following gliders have been towed during flight tests:

LS-1, LS-4, Baby-III, Astir and Twin Astir, Hornbach, Junior, Jantar, Pirat, Puchacz, Discus and DuoDiscus, Blanik, DG-100/300/500, DG-1000, ASK-21 and ASW-24, Nimbus and Cirrus, Cobra, PIK-20.

5.6 Remarks

Based on the rules of the Light Sport Aircraft airworthiness standards, the maximum dimension is defined by the weight of the glider to be towed, without consideration of glider aerodynamics. During the flight test with the DG-1000T, a maximum permissible glider weight of 1,580 lb has been demonstrated.

For gliders with a maximum permissible glider weight of 1,580lb, but less favorable aerodynamics than the DG-1000T, a lower climb rate and significantly longer take-off distance are to be expected.

NOTE	Inexperienced pilots should start with a single seat lightweight glider and increase the glider weight step by step.
-------------	--

6 Weight and Balance

6.1 General

When the aircraft is used for glider towing, the weight and balance calculations for the standard configuration are valid also for towing operations. Concerning payload, there are some restrictions which have to be observed, see also Section 3 within this supplement.

6.2 Required Equipment

The following additional equipment is required to use aircraft for glider towing, and must be taken into account in the weight and balance:

- TOST tow release clutch, type E 85
- REMOS mounting frame for tow release clutch
- release handle (colour yellow)
- REMOS oil temperature regulation flap
- rear view mirror

The following equipment is not part of the center of gravity calculation, but is also necessary for glider towing:

- towing rope with ring connector
- weak link 300 daN (green)

NOTE	The pilot has to ensure that the required weak link is attached to the tow rope; otherwise the structure of the aircraft may be overloaded!
-------------	---

7 Systems

The tow release handle is installed inside the cabin of the REMOS GX. The handle is located on the left hand side of the pilot seat, colored yellow. Pulling the handle releases the tow rope. The handle should provide a free play of 1/2 to 1 inch.



8 Aircraft Ground Handling and Service

During regular servicing intervals, the tow release clutch must be cleaned, lubricated and checked to assure proper operation.

A general overhaul of the release clutch must be conducted every 4 years or 4,000 towing operations, whatever comes first. For further information refer to the separate operator's manual of the manufacturer.

Imprint

Pilot Operating Handbook REMOS GX
Supplement Glider Towing

ASTM Edition

Copyright REMOS AG
© REMOS 2007-2017, all rights reserved

REMOS



REMOS GX

POH Supplement – Banner Towing

Supplement Banner Towing

Table of Content

sect.	description	page
1	General Information	11-2
2	Operating Limitations	11-3
3	Emergency Procedures	11-5
4	Normal Procedures	11-7
5	Performance	11-9
6	Weight and Balance	11-12
7	Systems	11-13
8	Aircraft Ground Handling and Service	11-14

1 General Information

1.1 Introduction

This supplement is to be used only in addition to the REMOS GX Pilot Operating Handbook!

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

1.2 Certification

The REMOS GX is manufactured in compliance with the rules of the Light Sport Aircraft airworthiness standards and does not conform to standard category airworthiness requirements.

1.3 Quick Reference

For use as a banner towing aircraft, the REMOS GX is equipped with the TOST E85 tow release clutch, which is connected to the fuselage tail by a specially developed mounting frame. To release the tow rope a release lever is located on the left hand side of the pilot seat (colored yellow). Additionally, a rear view mirror must be installed inside the aircraft, above the pilot seat.

2 Operating Limitations

2.1 Towing Speed

max. towing speed 65 kIAS

2.2 Tow Ropes

length of tow rope 130 to 200 ft
weak link max. 300 dN

2.3 Banner

When towing banners, the drag of the banner is relevant and not its size. Low drag banners up to 216m² have been tested.

max. drag 700 N at 73 kCAS
max. weight 20 kg

Approved banners should be used.

2.4 Crew

During banner towing operations, the REMOS GX must be operated only by one pilot (no passenger allowed, except for training/instruction).

2.5 Minimum Equipment List

- as per D-VFR minimum equipment list, plus
- TOST tow release clutch type E85
- REMOS mounting frame for tow release clutch
- yellow colored release handle
- rear view mirror placed on main spar carrythrough

2 Operating Limitations

2.6 Flying Without Doors

not permitted during towing operations

2.7 Required Placards and Markings

Adjacent to the airspeed indicator:



Adjacent to the tow release handle:



At the release clutch bracket:



3 Emergency Procedures

3.1 Engine Failure Procedure

Case 1: altitude not enough for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. engine OFF
4. fuel valve CLOSE
5. declare emergency MAYDAY MAYDAY MAYDAY
6. master switch OFF
7. safety belts TIGHTEN
8. tow rope RELEASE
9. emergency landing APPROPRIATE TERRAIN
10. banner RELEASE BEFORE LANDING

Case 2: altitude sufficient for engine re-start

1. AVIATE – NAVIGATE – COMMUNICATE
2. landing site IDENTIFY
3. carburetor heat PULL
4. electric fuel pump ON
5. choke OFF
6. starter ENGAGE
7. if engine does not start continue with case 1
8. if engine starts, continue flight and land on an airfield

3 Emergency Procedures

3.2 Failure of the Release Clutch Procedure

1. approach airspeed 60 KIAS
2. full flaps airspeed 78 KIAS
3. max. airspeed with banner 65 KIAS
4. flaps DOWN
5. engine power AS REQUIRED
6. elevator trim AS REQUIRED
7. electrical fuel pump ON
8. touchdown on main wheels first with elevator fully held back.

NOTE

The banner will hang down significantly from the aircraft due to its own weight. Therefore it can become tangled with obstacles, plants, wires, vehicles, persons, etc. Keep the approach as steep as possible so that banner and aircraft are on the ground at the same time.

4 Normal Procedures

4.1 Preflight Check Checklist

1. Perform standard preflight check
2. Check tow release clutch and test-release a tow rope

4.2 Take-Off Procedure

- | | |
|-------------------------------|---------------|
| 1. oil cooler flap | OPEN |
| 2. carburetor heat | OFF |
| 3. electric fuel pump | ON |
| 4. landing light | RECOMMENDED |
| 5. flaps | 15 degrees |
| 6. elevator trim | 2/3 UP |
| 7. rudder and aileron | NEUTRAL |
| 8. taxi forward | ROPE STRAIGHT |
| 9. engine power | FULL POWER |
| 10. rotate | 45 KIAS |
| 11. lift-off | 50 KIAS |
| 12. best climb | 60 KIAS |
| 13. max. airspeed with banner | 65 KIAS |
| 14. flaps | retract |

NOTE	During take-off, special care must be taken that the climb rate and airspeed are adjusted to the characteristics of the banner. Watch your rate of climb immediately after take-off.
-------------	--

NOTE	To maintain permissible water and oil temperatures during climb and descent, the aircraft must be equipped with an oil temperature regulation flap. During climb the operating lever of this flap should be in the "open/cooler" position.
-------------	--

4 Normal Procedures

4.3 Approach Checklist


- | | |
|------------------------------|--|
| 1. wind, weather, visibility | OK |
| 2. ATIS | CHECKED |
| 3. runway | CORRECT DIRECTION |
| 4. traffic pattern | ALTITUDE and ROUTING |
| 5. radios | ON and FREQUENCY SET |
| 6. transponder | AS REQUIRED |
| 7. carburetor heat | AS REQUIRED |
| 8. oil cooler flap | AS REQUIRED |
| 9. electric fuel pump | ON |
| 10. CHT or coolant temp. | max. 275°F = 135°C
max. 248°F = 120°C (w/ SB-012) |
| 11. oil temperature | 120...266°F = 50...130°C |
| 12. full flaps airspeed | $V_{FE} = 78$ KIAS |
| 13. approach airspeed | $V_{APP} = 60$ KIAS |
| 14. flaps | AS REQUIRED |
| 15. landing light | RECOMMENDED |

4.4 Landing Procedure

- | | |
|-----------------------------------|----------------------|
| 1. full flaps airspeed | $V_{FE} = 78$ KIAS |
| 2. approach airspeed | $V_{APP} = 60$ KIAS |
| 3. flaps | DOWN |
| 4. target airspeed | $V_T = 50$ KIAS |
| 5. engine power | AS REQUIRED |
| 6. elevator trim | AS REQUIRED |
| 7. tow rope | RELEASE ON THRESHOLD |
| 8. touchdown on main wheels first | |
| 9. brakes | AS REQUIRED |

5 Performance

5.1 Take-Off Distance

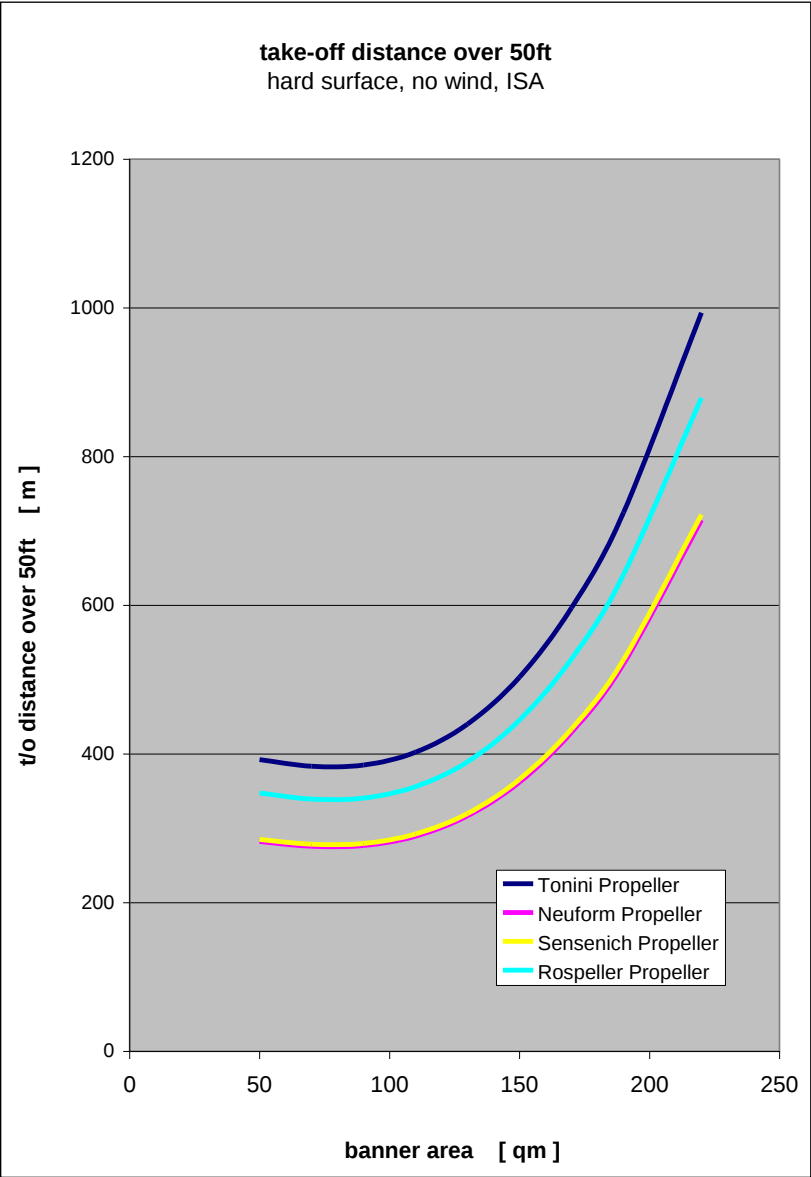

5 Performance

5.2 Effects on Take-Off Distance

Performance data apply under ISA conditions on an even, dry, hard runway surface. Various circumstances have an effect on take-off performance. According to CAA-circular AIC 127-2006, it is recommended to use following add-ons on roll- and air distances:

add-ons on take-off roll distance	
for dry grass	+ 20%
for wet grass	+ 30%
for soft surface	+ 60%
per 5 knots tailwind component	+ 20%
per 2% uphill slope	+ 10%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft


add-ons on take-off air distance	
for dirty or wet wings	+ 30%
per 5 knots tailwind component	+ 20%
for high temperatures above standard	+ 10% per 10°C
for altitude above sea level (density altitude)	+ 10% per 1,000 ft

NOTE	Reduction of take-off distances due to downhill slope or headwind must not be taken into account.
-------------	---

NOTE	Especially in banner towing the take-off distances can vary significantly with precise flying habits and the drag of the banner.
-------------	--

5 Performance

ISA std. Temperature

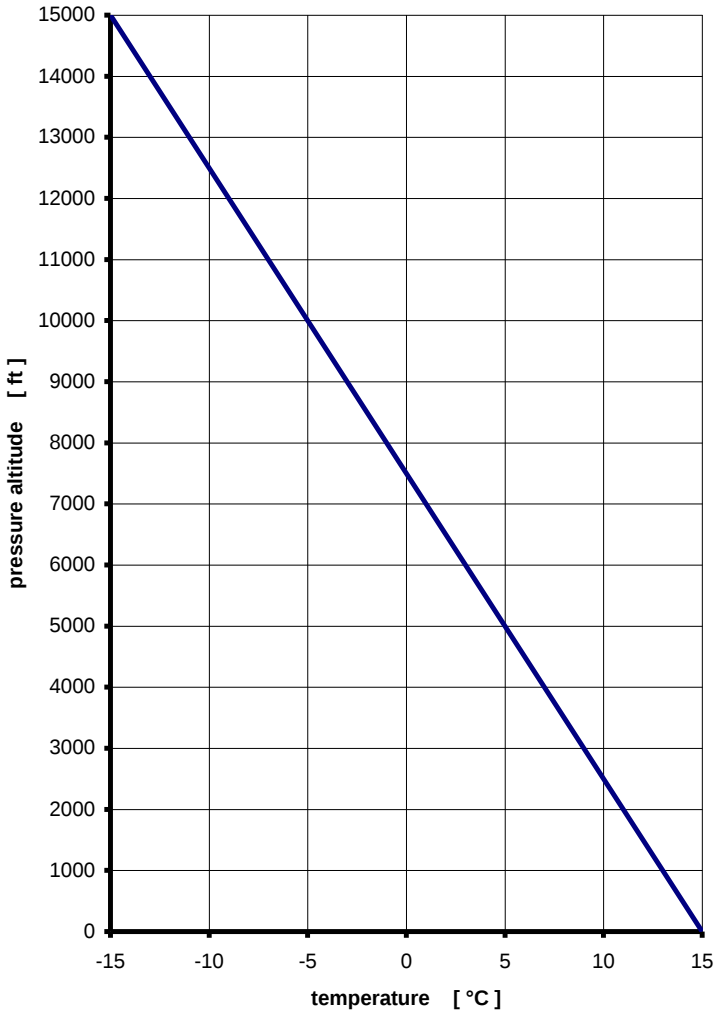

6 Weight and Balance

6.1 General

When the aircraft is used for banner towing, the weight and balance calculations for the standard configuration are valid also for towing operations. Concerning payload, there are some restrictions which have to be observed, see also Section 3 within this supplement.

6.2 Required Equipment

The following additional equipment is required to use aircraft for banner towing, and must be taken into account in the weight and balance:

- TOST tow release clutch, type E 85
- REMOS mounting frame for tow release clutch
- release handle (colour yellow)
- REMOS oil temperature regulation flap
- rear view mirror

The following equipment is not part of the center of gravity calculation, but is also necessary for glider towing:

- towing rope with ring connector
- weak link 300 daN (green)

NOTE	The pilot has to ensure that the required weak link is attached to the tow rope; otherwise the structure of the aircraft may become overloaded!
-------------	---

7 Systems

The tow release handle is installed inside the cabin of the REMOS GX. The handle is located on the left hand side of the pilot seat, colored yellow. Pulling the handle releases the tow rope. The handle should provide a free play of 1/2 to 1 inch.



8 Aircraft Ground Handling and Service

During regular servicing intervals, the tow release clutch must be cleaned, lubricated and checked to assure proper operation.

A general overhaul of the release clutch must be conducted every 4 years or 4,000 towing operations, whatever comes first. For further information refer to the separate operator's manual of the manufacturer.

Imprint

Pilot Operating Handbook REMOS GX
Supplement Banner Towing

ASTM Edition

Copyright REMOS AG
© REMOS 2007-2017, all rights reserved

REMOS



REMOS GX

POH Supplement – Continued Airworthiness

Supplement Continued Airworthiness

Table of Content

sect.	description	page
1	Purpose	12-2
2	Continued Airworthiness System	12-3
3	Owner/Operator Responsibilities	12-5
4	Release of Notices to the Public	12-7
5	Documentation Update	12-8
6	Maintenance and Annual Condition Inspection	12-9
7	Modifications or Change of Equipment	12-10
8	Repairs	12-12
9	Contact Data	12-13

1 Purpose

Continued Airworthiness is everything that is required to keep an aircraft in a safe condition to fly. This does not only include the technical part like maintenance and annual condition inspection. It also includes update of documentation, e.g. Pilot Operating Handbook, issuing repair instructions and repair approvals, change on equipment and feedback of the customer to the manufacturer. Especially the latter one is really important as this is the only way that the manufacturer gets to know of potential issues of safety of flight.

In some areas, the procedures of the continued airworthiness system of an LSA differ significantly from the ones of a standard category aircraft. This POH supplement shall give guidance to the customer how to act correctly in the continued airworthiness system and how to keep his aircraft airworthy and legal to fly.

2 Continued Airworthiness System

REMOS AG shall be informed about potential issues of safety of flight or service difficulties by means of the Customer Feedback Form G3-8 MA CA 0050. This document is attached to the maintenance manual and is also available on the website www.remos.com. If a customer does not inform the manufacturer by means of this form, REMOS AG also accepts any other way of information as long as it contains at least the following information:

- aircraft make and model
- serial number and callsign
- propeller make and model
- total time of aircraft and engine
- use of aircraft: private or commercial
- name and contact data of reporting person
- description of potential issue of safety or service difficulty

Once the customer has notified REMOS AG, the information will be forwarded immediately to the Head of Design by means of the customer feedback form.

Shall the customer opt for e-mail notification via info@remos.com then this e-mail will immediately be forwarded to the Head of Design.

Based on the information given in the customer feedback form, the Head of Design will perform a risk assessment. In most cases, the Head of Design will contact the customer to collect more and precise information. This includes eventual cooperation with authorities, e.g. in case of an accident.

2 Continued Airworthiness System

A risk assessment consists of:

- cause of accident/incident by pilot error or technical background
- safety effect determination
- risk assessment evaluation
- decision of required alerting of the public
- decision of corrective action

The continued airworthiness system of REMOS AG does not only cover events that have occurred during operation of the aircraft. Proposals for improvements or corrections, service difficulties, findings during maintenance events or annual condition inspections are also covered by the continued airworthiness system. In case that service staff identifies a potential safety of flight issue or a real service/maintenance problem, a customer feedback form must be filled out and handed forward to the Head of Design.

The customer shall not be afraid of consequences like revoking licenses. This is not the intention and not the job of an aircraft manufacturer. If there is no immediate danger for other customers or the flying public, REMOS AG will never notify authorities.

3 Owner/Operator Responsibilities

During handover of the aircraft, the owner/operator is introduced into the continued airworthiness system of REMOS AG. The customer is informed about the following:

- The maintenance handbook provides all information that the customer needs to comply with the regulations, especially with continued airworthiness and maintenance.
- It is the owner/operator's responsibility to provide the manufacturer with current contact information. Only with current contact information the manufacturer is able to contact the customer in case service bulletins or safety alerts need to be sent out.
- In case a safety of flight issue or significant service difficulty reveals, it is the responsibility of the owner/operator to inform the manufacturer. The owner/operator shall not seek for solutions on his own and/or modify the aircraft in a way that is not covered by the maintenance manual.
- Shall the manufacturer release a notice of corrective action, it is the responsibility of the owner/operator to comply with it. Furthermore, the owner/operator has the responsibility to comply with all applicable aviation authority regulations in regard to maintaining the airworthiness of the LSA airplane.
- In case the manufacturer has released a notice of corrective action, the owner must comply with it within the timeframe defined in the notice. If there is no timeframe defined, then the latest time to comply with it is the next annual condition inspection.
- In case the owner/operator does not comply with the maintenance manual and/or releases of corrective action, the LSA is not in compliance with the accepted ASTM consensus standards. This means that the aircraft is not airworthy and operating this aircraft is not legal. In case the responsible aviation authority (in case of the USA this is the FAA) gets to know about this, the owner/operator may be subject to regulatory action by the authority.

3 Owner/Operator Responsibilities

This information is provided by means of the customer commitment form, which is part of the maintenance manual. The owner/operator shall sign this form and send it to REMOS AG. On this form the owner/operator shall also provide the manufacturer with current contact data.

If the aircraft is sold to another customer, a new customer commitment form needs to be signed. This form will have the identical document number added by a dash and a counting number starting with 1 to make clear that this new form is a new revision.

4 Releases of Notices to the Public

There are three different levels of notices to the public, each representing a different level of importance:

- **SAFETY ALERT**
will be issued in case of an urgent safety of flight situation. Potentially an emergency safety of flight action is required in this case. All safety alerts will be published on the website www.remos.com which is the central means of communication of REMOS AG to its customers.
- **SERVICE BULLETIN**
will be issued in case a corrective action, a mandatory inspection or a modification of the aircraft is required. An immediate action is not required but a future action is required or recommended. All service bulletins will be published on the website www.remos.com which is the central means of communication of REMOS AG to its customers.
- **NOTIFICATION**
will be issued in case service information is required. The public is notified via the website www.remos.com which is the central means of communication of REMOS AG to its customers.

5 Documentation Update

Any documentation update will be released on the website www.remos.com. Owner/operators will not be informed by postal mail, unless such a documentation update is mandatory for safety of flight and is released by a safety alert or a service bulletin. Examples for documentation updates are new revisions of:

- Pilot Operating Handbook
- Service and Maintenance Checklist
- Annual Condition Inspection Checklist
- Type Design Datasheet

For copyright reasons, a new revision of the maintenance handbook is not available on the website, but only on request as hardcopy.

6 Maintenance and Annual Cond. Inspection

Maintenance intervals of all REMOS aircraft are 25h for the first maintenance event, followed by 100h inspections. In case that AVGAS 100LL is used for more than 30% of the time, oil change interval is reduced to 50h.

REMOS AG hereby defines the following persons that may perform maintenance and repair as defined in the Maintenance Manual including 25h and 100h inspection:

- Owner/operator: with Sport Pilot Certificate or higher: preventative maintenance, or line maintenance.
- LSA Repairman Maintenance: preventative maintenance, line maintenance, or heavy maintenance.
- A&P Mechanic: preventative, maintenance, line maintenance, or heavy maintenance.
- Part 145 Repair Station with appropriate ratings: preventative maintenance, line maintenance, or heavy maintenance

REMOS AG hereby defines the following persons that may perform the annual condition inspection:

- LSA Repairman Maintenance
- A&P Mechanic
- Part 145 Repair Station with appropriate ratings

Always use REMOS documents for your maintenance events and the annual condition inspection. These documents are available on the website www.remos.com.

7 Modifications or Change of Equipment

Certified equipment is listed in the maintenance manual. Only listed equipment may be installed on the aircraft without notifying REMOS AG. In case equipment that is described in the maintenance manual shall be exchanged on the aircraft, it is required to:

- update equipment list
- update weight and balance

Modifying the aircraft or changing equipment may be performed by any competent person. Updating the equipment list and the weight and balance report may only be performed by

- LSA Repairman Maintenance
- A&P Mechanic
- Part 145 Repair Station with appropriate ratings

Any change that is not documented may not be performed on the aircraft without having it certified by REMOS AG. Nevertheless, it is possible to do so. Notify REMOS AG prior to the intended change of the aircraft. Engineering department will then decide which kind of documentation is required and will either prepare them or will ask the customer to have this documentation prepared. Followed by this, a Letter of Approval (LOA) will be prepared that needs to be signed by either an A&P Mechanic or a Part 145 Repair Station with appropriate ratings after the work is accomplished. Then this LOA will be signed by the Head of Design of REMOS AG and handed out to the customer. This procedure will be performed by e-mail.

The extent of work cannot generally be defined; it is always an individual project. Working hours of the engineering department will be charged by the hour according to actual pricelists.

This procedure is not intended and built up for the manufacturer to make money of it. In contrary, due to running projects within engineering department it usually costs more to prepare the documentation than it is charged for. This procedure is defined in the regulations, in this case ASTM F2483.

7 Modifications or Change of Equipment

Without having updated the equipment list and weight and balance or not having changes that are not part of the maintenance manual approved by the manufacturer, the aircraft is considered not airworthy and unsafe to fly. It is not legal to operate an aircraft without a current equipment list and weight and balance and required approvals by the manufacturer. Make sure the change of equipment is signed off in the aircraft's logbook and is entered in the aircraft's permanent record.

8 Repairs

Repairs are handled similarly as change of equipment. Any repair that is performed with standard tools by replacing damaged parts may be performed by any competent person. To release the aircraft back to service the repair must be signed off by

- Owner/Operator with at least a Sport Pilot License
- LSA Repairman Maintenance
- A&P Mechanic
- Part 145 Repair Station with appropriate ratings

It is recommended to perform a standard maintenance event and an annual condition inspection once a repair has been performed that could affect safety of flight.

Structural repairs that are described in the maintenance manual are handled identically. In case the damage exceeds the described ones, an individual repair instruction is required. In this case notify REMOS AG by means of the customer feedback form. Engineering will then prepare individual and precise repair instructions. Repairing a composite aircraft is completely different from repairing a metal aircraft or a composite boat. Therefore only competent persons may perform the work. REMOS AG hereby defines the following persons that may perform the repair:

- LSA Repairman Maintenance with composite knowledge
- A&P Mechanic with composite knowledge
- Part 145 Repair Station with appropriate ratings

Notify REMOS AG prior to the intended repair. Engineering department will then decide which kind of repair and documentation is required and will either prepare them or will ask the customer to have this documentation prepared. Followed by this a Repair Approval (LOA) will be prepared that needs to be signed by either an A&P Mechanic or a Part 145 Repair Station with appropriate ratings after the work is accomplished. Then this Repair Approval will be signed by the Head of Design of REMOS AG and handed out to the customer. This procedure will be performed by e-mail.

8 Repairs

The extent of work cannot generally be defined; it is always an individual project. Working hours of the engineering department will be charged by the hour according to actual pricelists.

This procedure is not intended and built up for the manufacturer to make money of it. In contrary, due to running projects within engineering department it usually costs more to prepare the documentation than it is charged for. This procedure is defined in the regulations, in this case ASTM F2483.

Without having the repair performed and approved according to the manufacturer's instruction, the aircraft is considered not airworthy and unsafe to fly. It is not legal to operate an aircraft without current documentation and required approvals by the manufacturer. Make sure the repair is signed off in the aircraft's logbook and is entered in the aircraft's permanent record.

9 Contact Data

The manufacturer of the REMOS aircraft and the only responsible entity for continued airworthiness is

REMOS AG

Franzfelde 31
D-17309 Pasewalk

G E R M A N Y

Tel: +49-3973-225519-0

Fax: +49-3973-225519-99

Email: service@remos.com

Web: www.remos.com

Imprint

Pilot Operating Handbook REMOS GX
Supplement Continued Airworthiness

ASTM Edition

Copyright REMOS AG
© REMOS 2007-2017, all rights reserved

REMOS



REMOS GX

POH Supplement – Abbreviated checklists

Supplement Abbreviated Checklists

intentionally left blank

Supplement Abbreviated Checklists

Purpose

No matter if the airplane is operated according to non-commercial or commercial operating regulations, the pilot is obliged to use cockpit checklists.

The checklists provided in the POH sections 3 (emergency procedures) and 4 (normal procedures) are very comprehensive and therefore sometimes a bit inconvenient to use. Therefore, third parties often offer abbreviated checklists that are often used in the cockpit. These checklists are neither approved nor controlled by the airplane manufacturer and therefore not necessarily complete or correct.

NOTE	REMOS encourages the pilot NOT to use third party abbreviated checklists, but checklists released by REMOS only.
-------------	--

This POH supplement section 13 offers abbreviated checklists released by REMOS. By using these abbreviated checklist, the pilot in command acknowledges that the content is abbreviated and might be incomplete. Always refer to sections 3 and 4 for full version of these checklists.

NOTE	Always refer to POH sections 3 and 4 for full version of these checklists.
-------------	--

NOTE	This POH may only be used for aircraft SN429 or higher or with REMOS notification NOT-014 implemented.
-------------	--

Supplement Abbreviated Checklists

intentionally left blank

Supplement Abbreviated Checklists

CHECK BEFORE ENGINE START

preflight checkOK
 seat beltsFASTENED
 brakeSET

ENGINE START

master switchON
 external lightsON
 electric fuel pumpON
 choke..... AS REQUIRED
 starterENGAGE
 oil pressure..... min. 2.0 bar
 avionic switchON

ENGINE RUN-UP

oil temperature min. 50°C
 engine speed.....4.000 rpm
 magneto check... max. 300 rpm drop

TAKE-OFF

departure BRIEFED
 flaps..... CLEAN
 engineFULL POWER
 lift-off 45 KIAS
 climb..... 60 KIAS

CLIMB

flaps..... CLEAN
 engineFULL POWER
 best climb 60 KIAS

CRUISE

power setting..... AS R'QRD
 engine parametersOK

DESCENT

flaps..... CLEAN
 power setting..... AS R'QRD

LANDING

approach..... BRIEFED
 flaps DOWN
 approach speed 60 KIAS

SHUTDOWN

brake.....SET
 avionic switch OFF
 ignition key..... OFF
 master switch..... OFF

AIRSPPEED LIMITATIONS for MTOW

demonstrated x-wind 15 kts
 stallspeed flaps 40° 42 KIAS
 stallspeed flaps clean 44 KIAS
 best angle of climb..... 50 KIAS
 best rate of climb 60 KIAS
 max. flap extended 78 KIAS
 max. maneuvering 88 KIAS
 max. turbulence 107 KIAS
 never exceed speed135 KTAS

FUEL

total.....84 ltr
 usable.....80 ltr
 gradeAVGAS, MOGAS, E10

ENGINE PARAMETERS

RPM warmup..... 2.000 rpm
 max. cont. speed. 5.500 rpm
 max. speed 5.800 rpm
 max. cooling temp.....120/135°C
 min oil temp.50°C
 max. oil temp.130°C
 max. EGT890°C
 oil pressure2.0 ... 5.0 bar
 fuel pressure.....2.8 ... 3.2 bar

**THIS IS AN ABBREVIATED CHECKLIST! REFER TO PILOT
 OPERATING HANDBOOK SECTION 4 FOR FULL VERSION!**

Supplement Abbreviated Checklists

ABBREVIATED EMERGENCY CHECKLIST

AVIATE – NAVIGATE - COMMUNICATE

DECLARE EMERGENCY

SPIN RECOVERY

engine IDLE
aileron NEUTRAL
rudder..... OPPOSITE SPIN
elevators PUSH

RECOVERY SYSTEM RELEASE

Engine..... STOP
Recovery system RELEASE
Fuel valve CLOSE
Master switch OFF
Safety belts TIGHTEN

EMERGENCY DESCENT

engine IDLE
flaps CLEAN
max. turbulence 107 KIAS
never exceed speed ... 135 KTAS

ENGINE STOPPAGE ON TAKE-OFF

brakes AS R'QRD
ignition key OFF

ENGINE STOPPAGE IN FLIGHT

landing site..... IDENTIFY
electric fuel pump..... ON
starter ENGAGE
landing EMERGENCY LDG

GENERATOR FAILURE

non-essentials..... OFF
system TROUBLESHOOT

ENGINE FIRE ON GROUND

ignition key..... OFF
brakes AS R'QRD
vacate aircraft ... IMMEDIATELY

ENGINE FIRE IN FLIGHT

ignition key..... OFF
sideslip AS R'QRD
landing EMERGENCY LDG

CARBURETOR ICING

carburetor heat PULL
electric fuel pump..... ON
power setting FULL POWER

EMERGENCY LANDING

landing site..... IDENTIFY
direction of wind..... IDENTIFY
flaps DOWN
master switch..... OFF
approach speed 60 KIAS
vacate aircraft ... IMMEDIATELY

THIS IS AN ABBREVIATED CHECKLIST! REFER TO PILOT
OPERATING HANDBOOK SECTION 3 FOR FULL VERSION!

Imprint

intentionally left blank

Imprint

Pilot Operating Handbook REMOS GX
Abbreviated Checklists

ASTM Edition

Copyright REMOS AG
© REMOS 2007-2017, all rights reserved